


# Exit Stopper®

## Quick Install


STI-6400 Series

### SET UP


1. Key in OFF position




2. Remove security screw

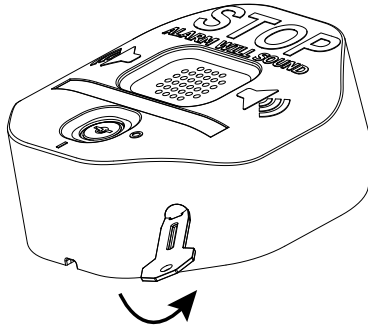


3. Remove cover from base, push on lock to separate

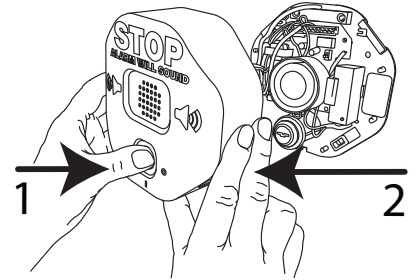


4. Choose setting – refer to switch table, default settings shown side 2

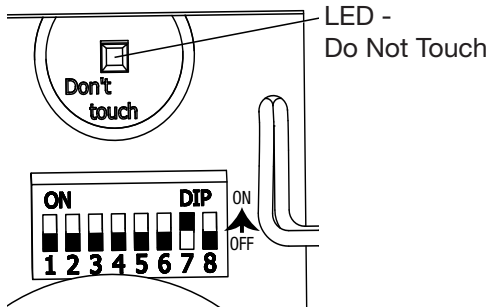


5. Unwrap battery and connect

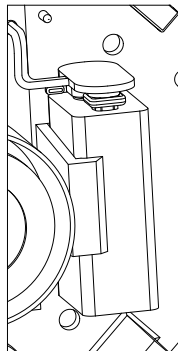


6. Terminal block (for remote and relay options) – refer to full install online for wiring connections

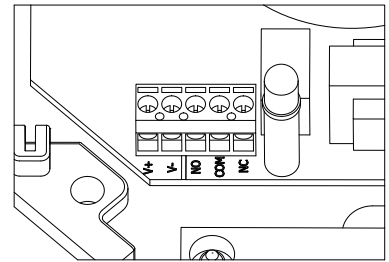

7. Test – place magnet next to reed, turn on, separate magnet from reed

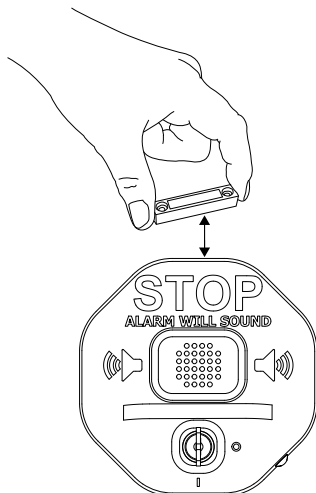


8. Apply language label if desired

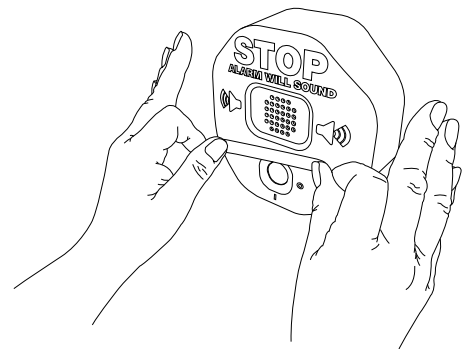


# MOUNTING


- 9.** Place reed at desired location (top, right, bottom or left)




- 10.** Position base. Mark and drill four (4) holes 1" (25mm) deep. Using plastic anchor, drill 3/16" (4.5mm). Install into wood or steel: drill 9/64" (3.5mm). Mount using (4) M4 x 25mm screws.

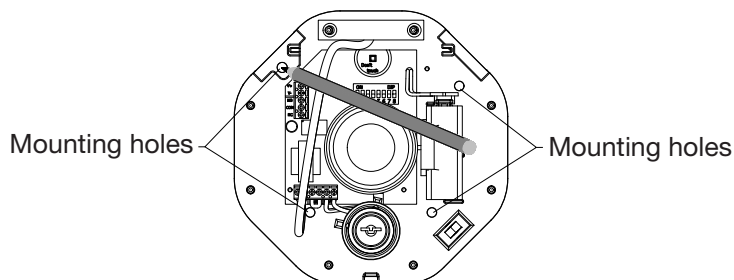


- 11.** Install reed magnet, mark with pencil, drill, install using plastic anchor, drill 3/16" (4.5mm). Install into wood or steel: drill 1/8" (3mm). Mount with (2) M3.5 x 32mm screws.

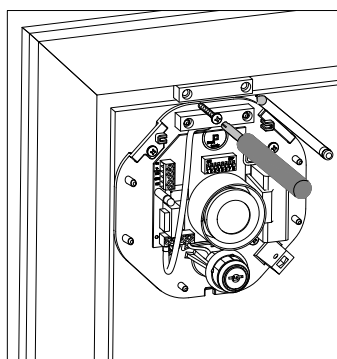

- 12.** Test, turn key on, open door

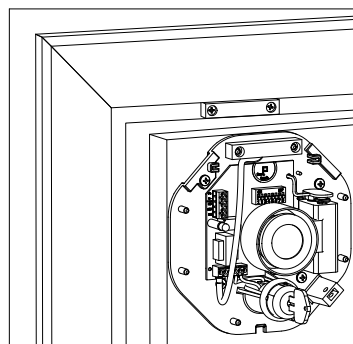

- 13.** Replace cover, snap lid from top, secure with security screw

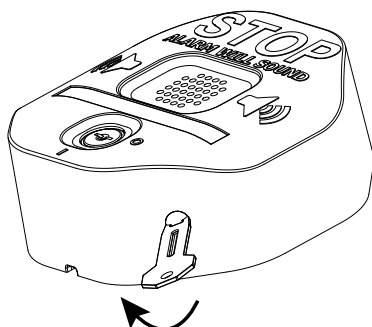

| SWITCH SETTINGS                             | 1    | 2    | 3    | 4    | 5    | 6    | 7   | 8    |
|---------------------------------------------|------|------|------|------|------|------|-----|------|
| Arming - immediate                          | OFF* |      |      |      |      |      |     |      |
| Arming - 15 second delay                    | ON   |      |      |      |      |      |     |      |
| Trip - immediate                            |      | OFF* |      |      |      |      |     |      |
| Trip - 15 second delay                      |      | ON   |      |      |      |      |     |      |
| Shut-off based on duration (switches 4 & 5) |      |      | OFF* |      |      |      |     |      |
| Shut-off approx. 3 sec. after door closes   |      |      | ON   |      |      |      |     |      |
| Duration - 30 second alarm                  |      |      |      | OFF* | OFF* |      |     |      |
| Duration - 180 second alarm                 |      |      |      | OFF  | ON   |      |     |      |
| Duration - continuous alarm                 |      |      |      | ON   | OFF  |      |     |      |
| Duration - annunciator mode                 |      |      |      | ON   | ON   |      |     |      |
| Low battery detection → ON                  |      |      |      |      |      | OFF* |     |      |
| Low battery detection → OFF                 |      |      |      |      |      | ON   |     |      |
| Volume - high                               |      |      |      |      |      |      | ON* |      |
| Volume - low                                |      |      |      |      |      |      | OFF |      |
| Relay function → OFF                        |      |      |      |      |      |      |     | OFF* |
| Relay function → ON                         |      |      |      |      |      |      |     | ON   |

\*default



**Safety Technology International**

2306 Airport Rd • Waterford, MI 48327, USA  
Phone: 248-673-9898 • Fax: 248-673-1246  
info@sti-usa.com • www.sti-usa.com

Taylor House • 34 Sherwood Road • Bromsgrove, Worcestershire • B60 3DR • England  
Tel: +44 (0)1527 520 999 • Fax: +44 (0)1527 501 999 • info@sti-emea.com • www.sti-emea.com