

## DS-UPS600 UPS



- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- Compact design




## ▪ Specification


| Model             |                       | DS-UPS600                                                                                                                                                               |
|-------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power</b>      | UPS Capacity          | 600 VA / 360 W                                                                                                                                                          |
| <b>Input</b>      | Input Voltage Range   | 140 VAC to 290 VAC                                                                                                                                                      |
|                   | Input Frequency       | 50/60 Hz                                                                                                                                                                |
| <b>Output</b>     | Output Voltage Range  | 210 VAC to 235 VAC                                                                                                                                                      |
|                   | Output Frequency      | 50 Hz ± 0.5 Hz                                                                                                                                                          |
|                   | Transfer Time         | ≤ 10 ms                                                                                                                                                                 |
|                   | Waveform              | PWM                                                                                                                                                                     |
| <b>Battery</b>    | Battery Type          | 12 V/7 Ah                                                                                                                                                               |
|                   | Recharge Time         | 4-6 hours recover to 90% capacity                                                                                                                                       |
| <b>Indicator</b>  | Display               | LED indicator<br>Working Mode (AC Mode): Solid green<br>Charging Mode (DC Mode): Solid red<br>Overloading Mode: Flashing yellow                                         |
|                   | Alarm                 | Charging Mode (DC mode): Sounding every 8 seconds<br>Low Battery: Sounding every second<br>Overloading Mode: Sounding every 0.5 seconds<br>Fault: Continuously sounding |
| <b>Interface</b>  | Communicate Ports     | No                                                                                                                                                                      |
| <b>Protection</b> | Full Protection       | Surge protection, Overload protection, Discharge protection                                                                                                             |
| <b>General</b>    | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F)                                                                                                                                         |
|                   | Operating Humidity    | 30% to 90% (non-condensing)                                                                                                                                             |
|                   | Dimension             | 274 mm × 95 mm × 139 mm (10.79" × 3.74" × 5.47")                                                                                                                        |
|                   | Weight                | Approx. 4.2 kg (9.26 lb)                                                                                                                                                |

## ▪ Available Model

DS-UPS600

▪Dimension

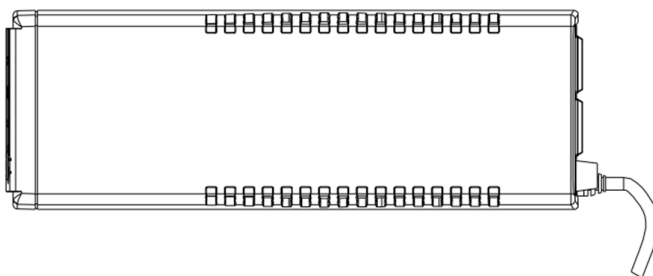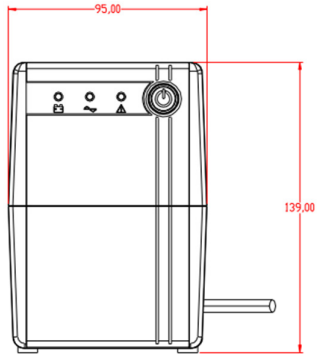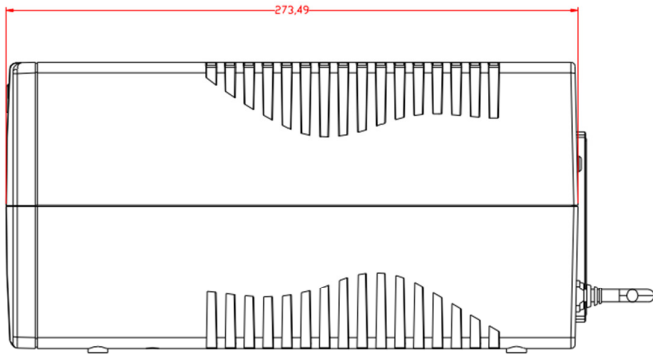

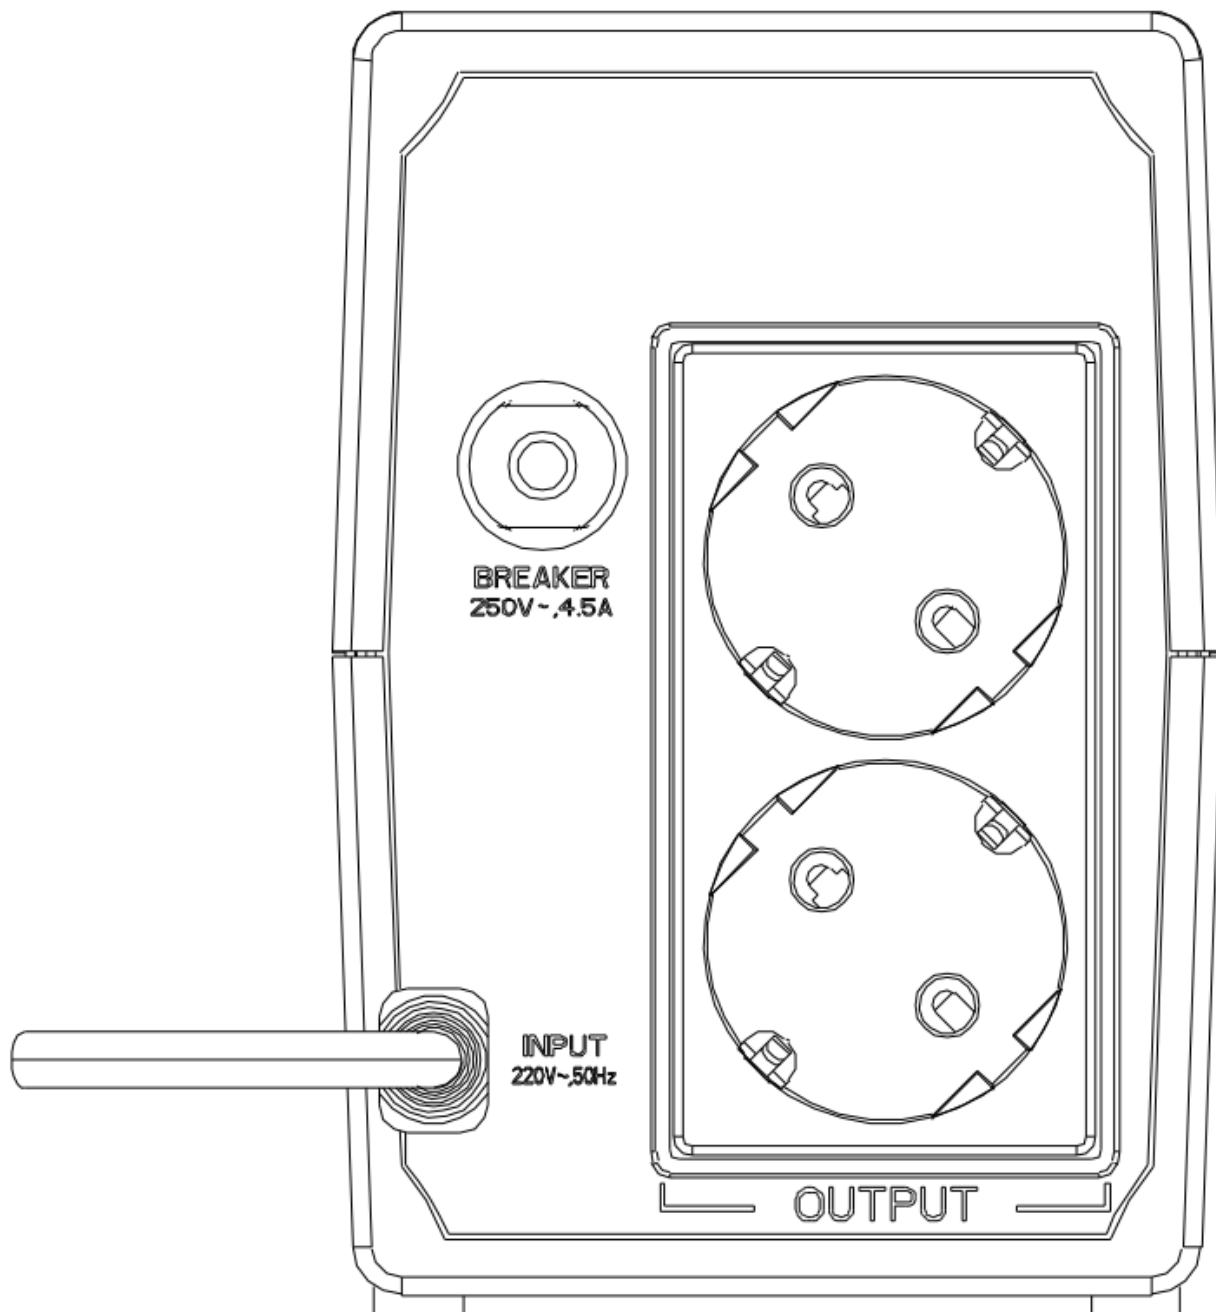**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq