



EV2460-WT

Your advantages

The EV2460 immediately stands out thanks to its extremely narrow bezel. The compact and attractive design provides more desk space. In terms of picture quality and ergonomics, the 23.8-inch monitor in 16:9 aspect ratio also meets the highest demands for a modern screen. An anti-reflection coating and Auto EcoView ensure a glare-free view of the screen. The LCD panel featuring IPS technology enables the greatest possible viewing angles, making it a pleasure to work with the EV2460. The monitor is virtually frameless and is especially impressive when used for multimonitor viewing. It offers a wide range of connection options thanks to DisplayPort, HDMI, DVI-D and D-sub input as well as four USB downstream ports.


- 23.8-inch LCD monitor in 16:9 aspect ratio featuring IPS technology for excellent image quality
- Bezel only 1 mm: amazingly compact and ultra-elegant design
- ✓ Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView and EcoView Optimizer for maximum energy-efficiency and superb ergonomics
- Optimised antireflection properties and flexible positioning
- ✓ USB 3.1 hub with one upstream and four downstream ports
- ✓ DisplayPort, HDMI, DVI-D and D-sub signal inputs
- Proven to be environmentally friendly and produced in a socially responsible way






Ultra-slim. Ultra-smooth!

Whether it's in sophisticated black or pristine, eye-grabbing white: The ultra-thin design with its bezel of only 1 mm is truly impressive. A thin black glass frame with a width of just 5.4 mm is all that separates the display and bezel from one another on both sides and the top. The side profile and the back of the monitor also have a slimline, delicate appearance. The monitor is really something to behold, giving you plenty of space for your imagination.

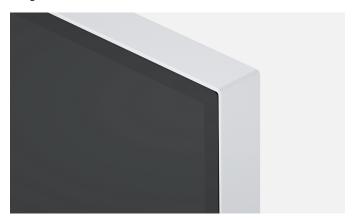


Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2460-WT instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.



Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920×1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m^2 . That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

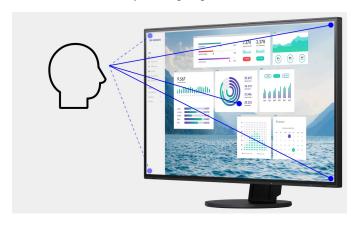

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay



Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.





Look-Up-Table with 10 and more bit

Look-Up-Table with 8 bit

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.





During the day

In the evening

Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

EIZO FlexScan monitors are certified by TÜV Rheinland as flicker-free, emitting low quantities of blue light.

Why do we experience eye fatigue when using a computer? EIZO has the answers.

Anti-glare coating: more image, less reflection

The EV2460-WT offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2460-WT effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.




One monitor, many ports

It doesn't get simpler than this: Most end devices, such as PCs, laptops and cameras, can be connected directly to the monitor, thanks to its wide range of signal interfaces. The screen also features four USB type A 3.1 ports. This allows different devices such as mice, keyboards and headsets to be connected. This makes your everyday work easier and guarantees a tidy desk.



Flexible base

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.



Preset colour modes: Optimised display at the press of a button

Preset colour modes make it easier for you to work and look at images, texts, or films. Because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the net, or writing texts. You can configure the respective presettings for brightness, gamma correction, and colour temperature at the press of a button. An example: Paper mode simulates the pleasant contrast of books by reducing the blue light portion. This protects your eyes while reading and stops them from getting tired.




Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

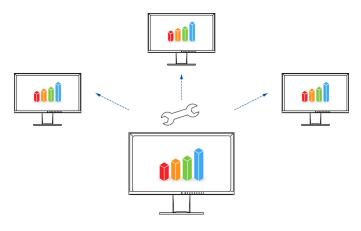



Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2460-WT by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions that allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

More about Screen InStyle

Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

More about Screen InStyle Server

Save up to 30% of energy with the EcoView Optimizer


Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consum-

ing any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

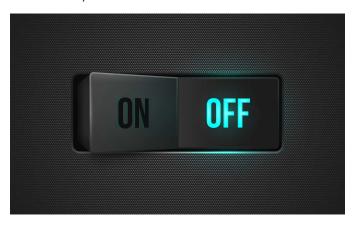

Environmentally and socially conscious production

EIZO uses the EV2460-WT to showcase how image and product quality go hand in hand with responsible planning, material procurement and production. This intrinsic value enables you to make a safe investment in a modern and reliable monitor.

Socially responsible production

The EV2460-WT is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Read more about our corporate social responsibility





Environmentally and climate friendly

Each EV2460-WT is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR report.



Sustainable and durable

The EV2460-WT is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2460-WT we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2460-WT consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled plastic.



A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform colour and texture without using paint.



Five-year warranty

EIZO grants a five-year warranty*. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

* in Belgium: including on-site replacement service





Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 8, EPEAT and Energy Star. The EV2460-WT is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.

Examples of compliance at EIZO include:

- ✓ Safe use of chemicals in cable insulation
- Comprehensive information transparency after servicing for the entire product lifecycle
- Safe management of chemicals throughout the entire production process.
- Appropriate work time management for employees.
- ✓ Anti-corruption management system
- Responsible procurement of minerals
- ✓ Disclosure of information on energy management





Specification

| \sim | | |
|--------|----|----|
| Сe | ne | ra |

| Item no. | EV2460-WT |
|----------------------|---------------------------|
| Case colors | White |
| Areas of application | Office, Gaming |
| Product line | FlexScan |
| EAN | 4995047055303 |
| Variants | EV2460-BK (Colour: Black) |
| | |

| Display | |
|---|--|
| Screen size [in inches] | 23.8 |
| Screen size [in cm] | 60.5 |
| Format | 16:9 |
| Viewable image size (width x height) | 527 x 296.5 |
| Ideal and recommended resolution | 1920 x 1080 (Full HD) |
| Pixel pitch [mm] | 0.2745 x 0.2745 |
| Pixel density [ppi] | 93 |
| Resolution supported | 1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480 |
| Panel technology | IPS |
| Max. viewing angle horizontal | 178 ° |
| Max. viewing angle vertical | 178 ° |
| Number of colours or greyscale | 16.7 million colours (display port, 8 Bit), 16.7 million colours (HDMI, 8 Bit), 16.7 million colours (DVI, 8 Bit), 16.7 million colours (D-Sub, 8 Bit) |
| Colour palette/look-up table | 1.06 billion colour tones / 10 Bit |
| Max. colour space (typical) | sRGB |
| Max. brightness (typical) [in cd/m²] | 250 |
| Max. dark room contrast (typical) | 1000:1 |
| Typical response time [grey/grey alternation] | 5 ms |
| Max. refresh rate [in hertz] | 60 |
| Backlight | LED |

| Features & control | |
|---|---|
| Preset colour/greyscale modes | sRGB, Paper, Movie, DICOM, 2x free modes for user selection |
| DICOM tone curve | ✓ |
| RadiCS application classes | VIII |
| Auto EcoView | ✓ |
| EcoView Index | ✓ |
| EcoView Optimizer | ✓ |
| Overdrive | ✓ |
| No flickering thanks to hybrid controls | ✓ |
| Signal range amplifier (HDMI) | ✓ |
| HDCP Decoder | ✓ |
| Input signal identification | ✓ |
| Built-in speakers | ✓ |
| OSD language | de, en, fr, es, it, se, ja, zh |
| Adjustment options | Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Colour Mode, Colour tone, Signal input, Resolution, Audio source, OSD language, Interpolation, Volume |
| Button Guide | ✓ |
| Integrated power unit | ✓ |

Ports

| Signal inputs | DisplayPort, DVI-D, HDMI, D-sub |
|----------------------|---|
| USB specification | USB 3.1 Gen 1 |
| USB upstream ports | 1 x type B |
| USB downstream ports | 4 x type A |
| Video signal | DisplayPort (HDCP 1.3), DVI (HDCP 1.4), HDMI (HDCP 1.4), RGB Analog |
| Sync formats | Separate |
| Audio input | 3.5 mm stereo jack, DisplayPort, HDMI |
| Audio output | 3.5 mm stereo jack |
| | |

Electric data

| Frequency | Dsub: 31-68 kHz/59-61 Hz; Display Port: 31-68 kHz/59-61 Hz; DVI-D: 31-68 kHz/59-61 Hz; HDMI: 49-51 Hz/59-61 Hz |
|---------------------------------------|--|
| Power consumption (typical) [in watt] | 10 |
| Maximum Power Consumption [in watt] | 50 (at maximum brightness and operation of all signal and USB ports) $$ |
| Power Save Mode [in watt] | 0.5 |
| Power consumption off [in watt] | 0 |
| Energieeffizienzklasse | В |
| Energy consumption/1000h [in kWh] | 9 |
| Power supply | AC 100-120 V / 200-240 V, 50/60 Hz |
| Power management | ✓ |

Dimensions & weights

| Dimensions [mm] | 538 x 333,6-473,6 x 233 |
|-------------------------------------|--------------------------------------|
| Weight [in kilograms] | 5.9 |
| Dimensions without stand [mm] | 538 x 320 x 54 |
| Weight without stand [in kilograms] | 3.8 |
| Swivel | 344 ° |
| Incline forward/backward | 5 ° / 35 ° |
| Pivot | √ 90° (clockwise and anti-clockwise) |
| Height adjustment range [mm] | 140 |
| Hole spacing | VESA standard 100 x 100 mm |

Certification & standards

| rtification | CE, CB, | , TCO certified | 8.0, | EPA Ene |
|-------------|---------|-----------------|------|---------|
| | | | | |

CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, FCC-B, CAN ICES-3 (B), VCCI-B, CCC, RoHS, China RoHS, WEEE

Software & accessories

| Accompanying software and other accessories are available for download | Screen InStyle |
|--|---|
| Additional supply | Manual via download, Power cord, Signal cable Display- Port - DisplayPort, USB 3.0 cable, Quick guide |
| Accessories | EIZO ScreenCleaner (for the best possible clean without scratching the monitor), PM200-K (DisplayPort cable to transfer digital video and audio signals.), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), PCSK-03R-WT (Thin Client Mount for the EIZO FlexStand 3R stand), CP200-WT (USB-C to DisplayPort cable, 200 m) |
| Warranty | |

Warranty and service

5 years warranty*

*) Maximum of 30,000 hours of operation from the date of purchase.**) Zero pixel error guarantee for completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.