





The Smarty is fully microprocessor-controlled and uses piezoelectric sounder and super bright LED-technology flasher. A direct move towards superior signalling features and low power consumption. The device is tamper protected, and provides a sounder-shutdown input which allows the flasher to continue signalling.

Main features	Smarty/SI	Smarty/GI
Power	13.8 Vdc	
Maximum current draw	130 mA	
Sounder- modulation/shutdown input	Yes	
Anti-opening and protection	Yes	
Piezoelectric sounder	Yes	
LED signal flasher	-	Yes
Light Intensity at 1m	-	25 lux
Sound pressure at 1m	110 dBA	
Protection Grade	IP31	
Dimensions (HxWxD)	76x112x30 mm	
Weight	110 g	

Sounderflasher - dimensions

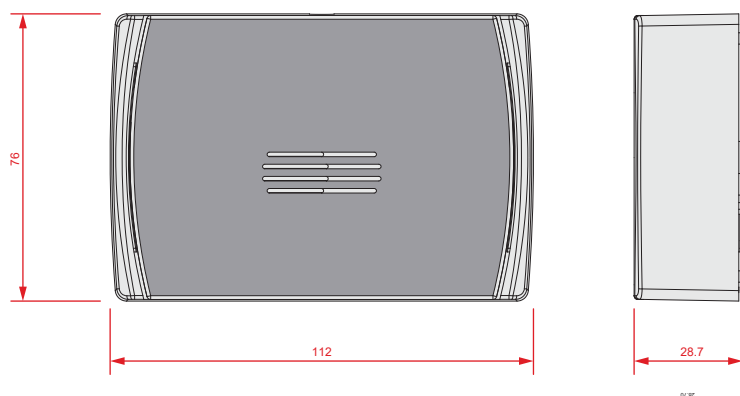


Sounderflasher - back

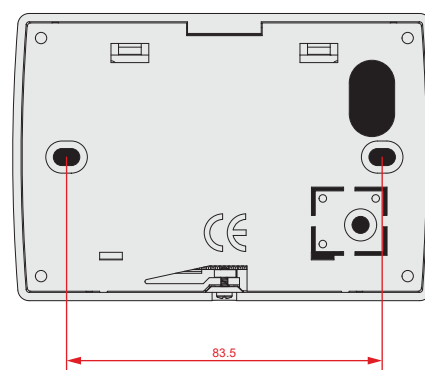


CONNECTION DIAGRAMS

Connection 2 wires

External power
supply 13.8V

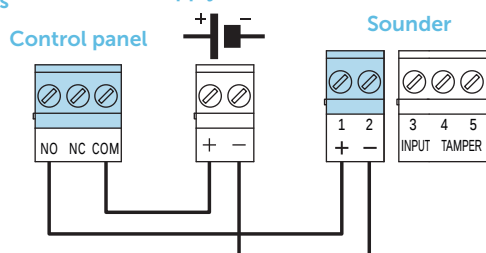

Tamper and volume adjustment connections

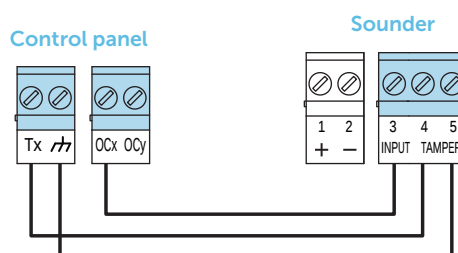

ORDER CODES

Smarty/SIB: indoor siren, white color, 12Vdc powered

Smarty/GIB: indoor siren with flasher, white color, 12Vdc powered

Smarty/GFR: indoor siren with flasher, red color, 24Vdc powered