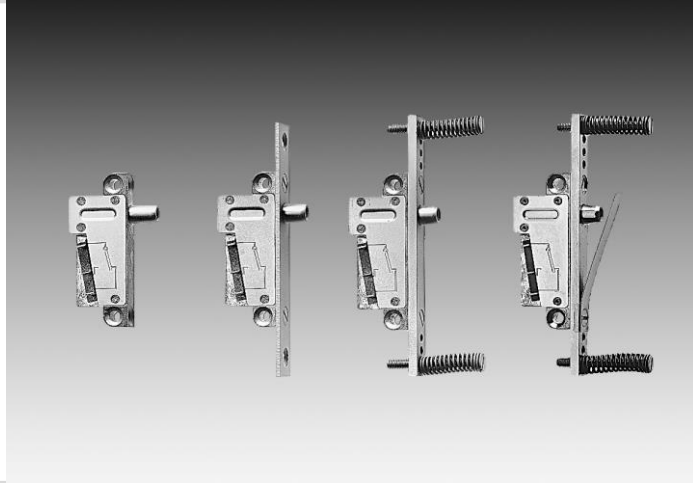


# TKU2 / TKU3 / TKU4 / TKU5

Surveillance contacts

VANDERBILT



## Key Features include:

- Universal application
- Robust construction
- Small dimensions
- Sabotage by magnet impossible

**Universal application.** The surveillance contacts announce the opening of doors, windows, etc. They can also be used to announce the state (open / closed) of the bolts.

**Great reliability.** The micro switch is built-in in a compact and non-corrosive die-cast casing. The micro switch is protected from mechanical deteriorations by a dead stop. Sabotage of the surveillance contact by an external magnet is impossible.


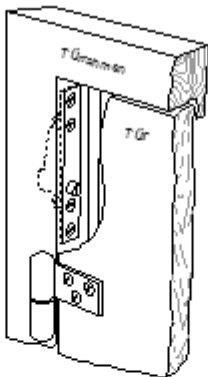
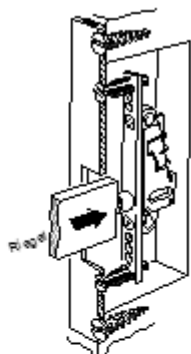
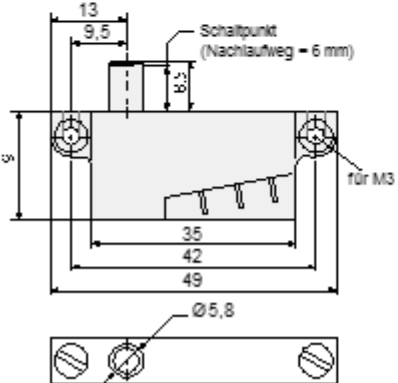
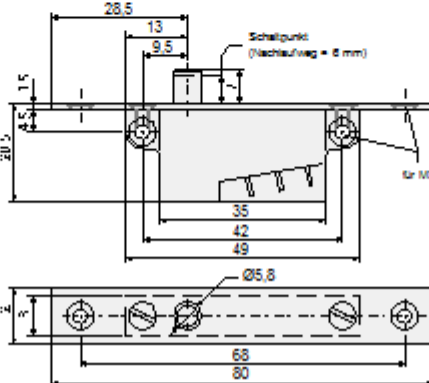
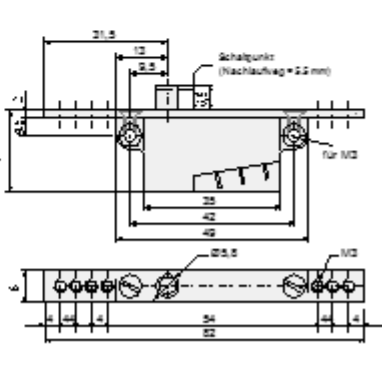
**Fast and simple to install.** The self-adhesive sheets facilities the assembly of the surveillance contacts.

**A solution for every problem.** With the four models TKU2, TKU3, TKU4 and TKU5 practically all the problems arising from the monitoring of an opening can be solved.

# TKU2 / TKU3 / TKU4 / TKU5

Surveillance contacts

VANDERBILT

| TKU2                                                                                            | TKU3                                                                                            | TKU4 / TKU5                                                                                              |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
|               |               |                      |
| <p>TKU2</p>  | <p>TKU3</p>  | <p>TKU4 / TKU5</p>  |

VANDERBILT

© Vanderbilt 2016

# TKU2 / TKU3 / TKU4 / TKU5

## Surveillance contacts

**VANDERBILT**

### ■ Technical Data

|                                                     |                  |
|-----------------------------------------------------|------------------|
| Single pole changeover contact                      |                  |
| - Switch power rating                               | Max. 25 W        |
| - Current                                           | Max. 1 A         |
| - Voltage                                           | Low voltage      |
| Actuation pressure                                  | max. 400 g       |
| Over travel, depending on type and shaft extensions | 4 ... 7 mm       |
| Ambient temprature range                            | - 20 ... + 50° C |

### ■ Ordering Data

| Type | Art. No.        | Designation                                                  | Weight   |
|------|-----------------|--------------------------------------------------------------|----------|
| TKU2 | VPBZ:2305080001 | Surveillance contact for surface mounting                    | 0.020 kg |
| TKU3 | VPBZ:2307860001 | Surveillance contact for recessed mounting                   | 0.030 kg |
| TKU4 | VPBZ:2307990001 | Surveillance contact for bolt locks                          | 0.035 kg |
| TKU5 | VPBZ:2442770001 | Surveillance contact for bolt locks with a protective spring | 0.040 kg |