



# Outlet (LAN)




## Ethernet wall outlet with two ports

Outlet (LAN) is a regular built-in outlet with two Ethernet ports that cannot be connected to an Ajax system or controlled via an Ajax app. The device seamlessly complements Ajax outlets and light switches within a single frame thanks to the matching design and color palette.

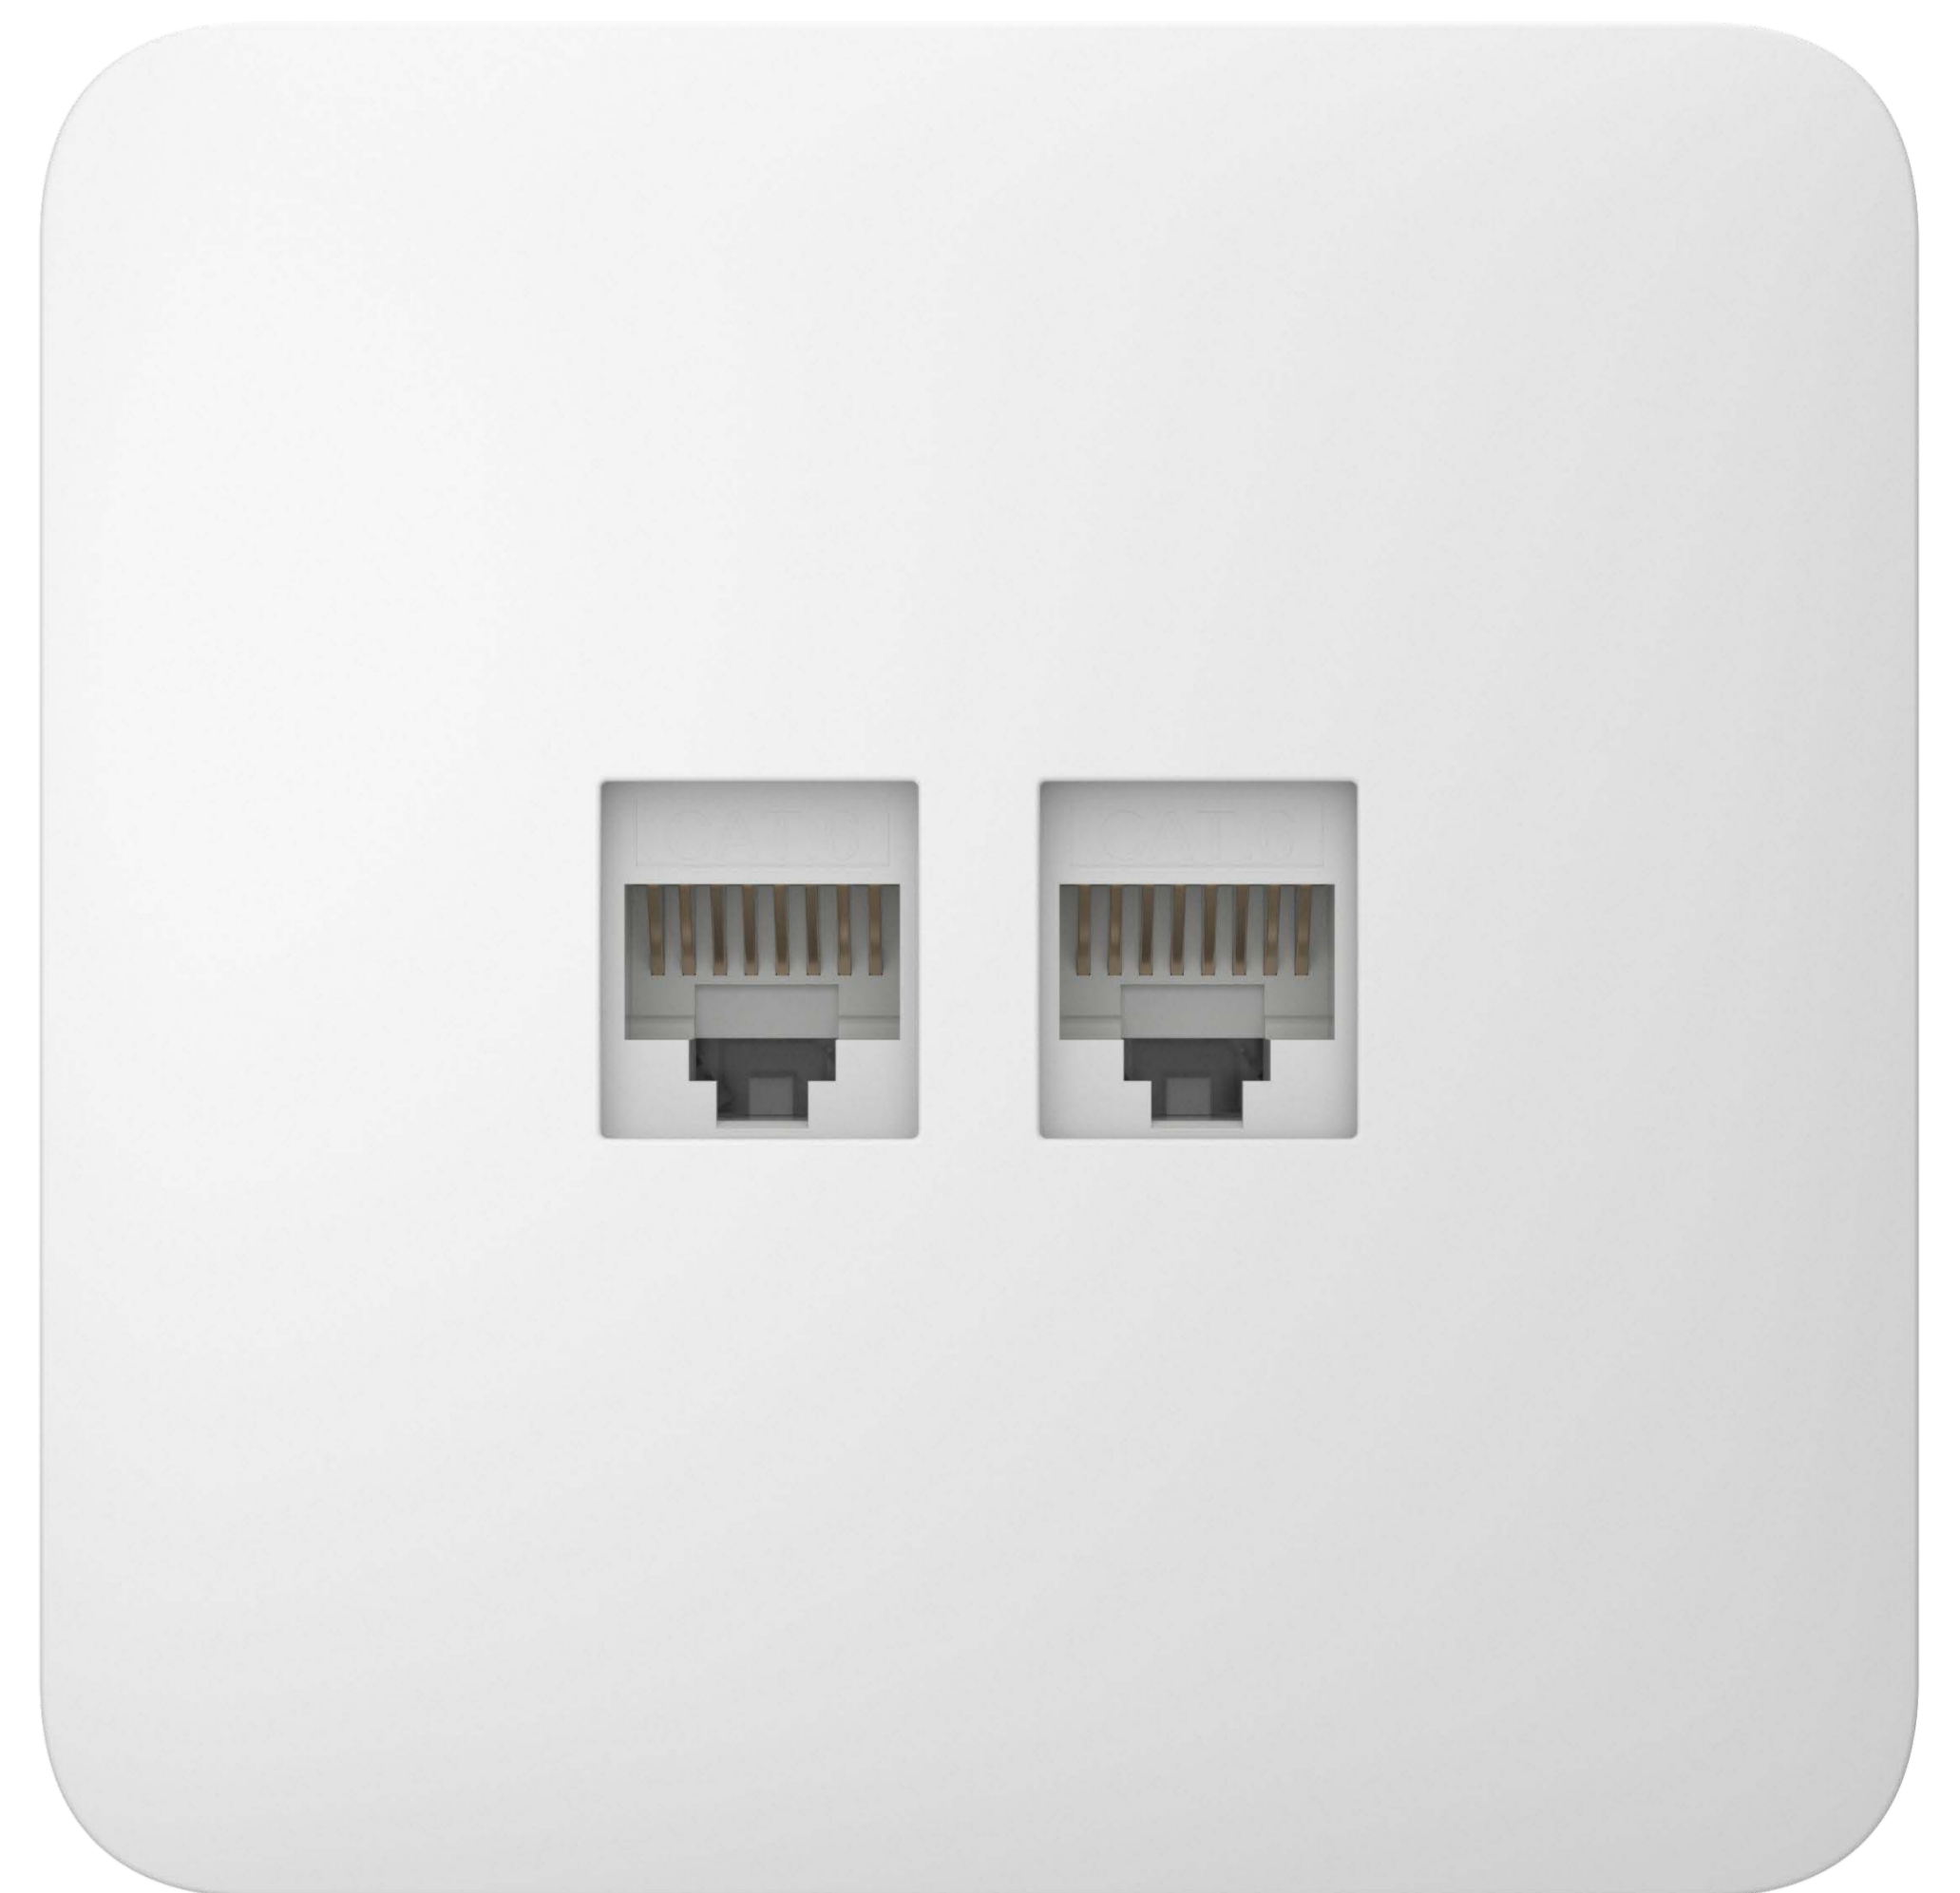


### Outlet (LAN) components

Outlet (LAN) is a prefab device. All components are sold separately and are attached to each other during installation.

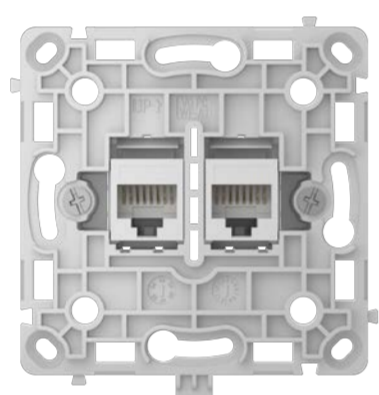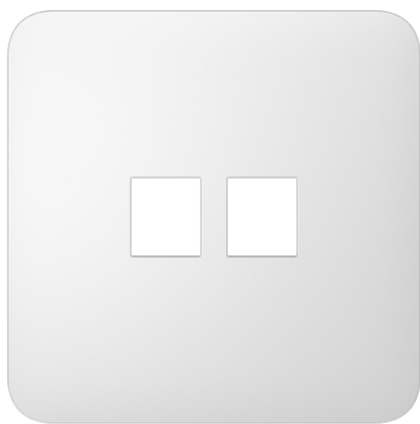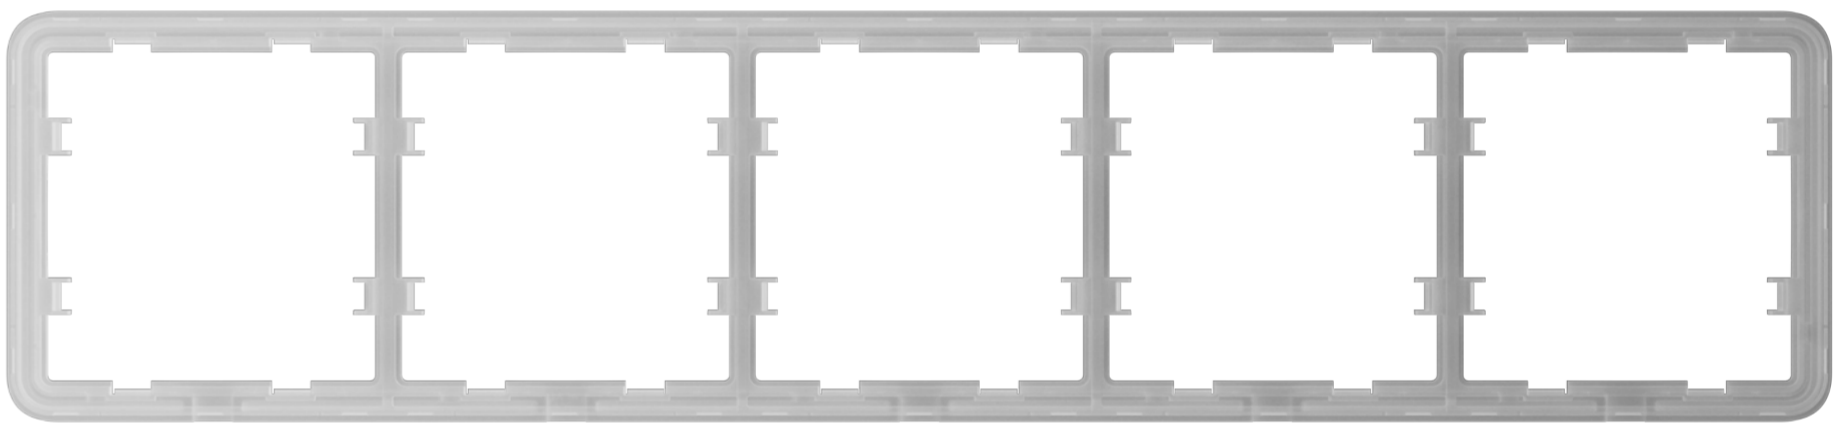
Core	Cover	Frame
Component for connecting Ethernet cables	Front panel	Plastic frame for side-by-side installation of 2 to 5 devices horizontally or vertically
		

If Outlet (LAN) is installed as a separate device, the cover and frame come as a single component. For side-by-side installation as a set, a separate frame and compatible covers are required.





### Designed for any interior

An eight-color palette makes Outlet (LAN) a perfect addition to any setting, from cozy homes and high-tech offices to industrial facilities.



### Configuration variability

Outlet (LAN) can be installed separately or combined with Ajax light switches and other outlet models. When arranged as a set, Ajax devices can be placed vertically<sup>1</sup> or horizontally within a single frame. With a matching product design and color palette, the set maintains a cohesive look.

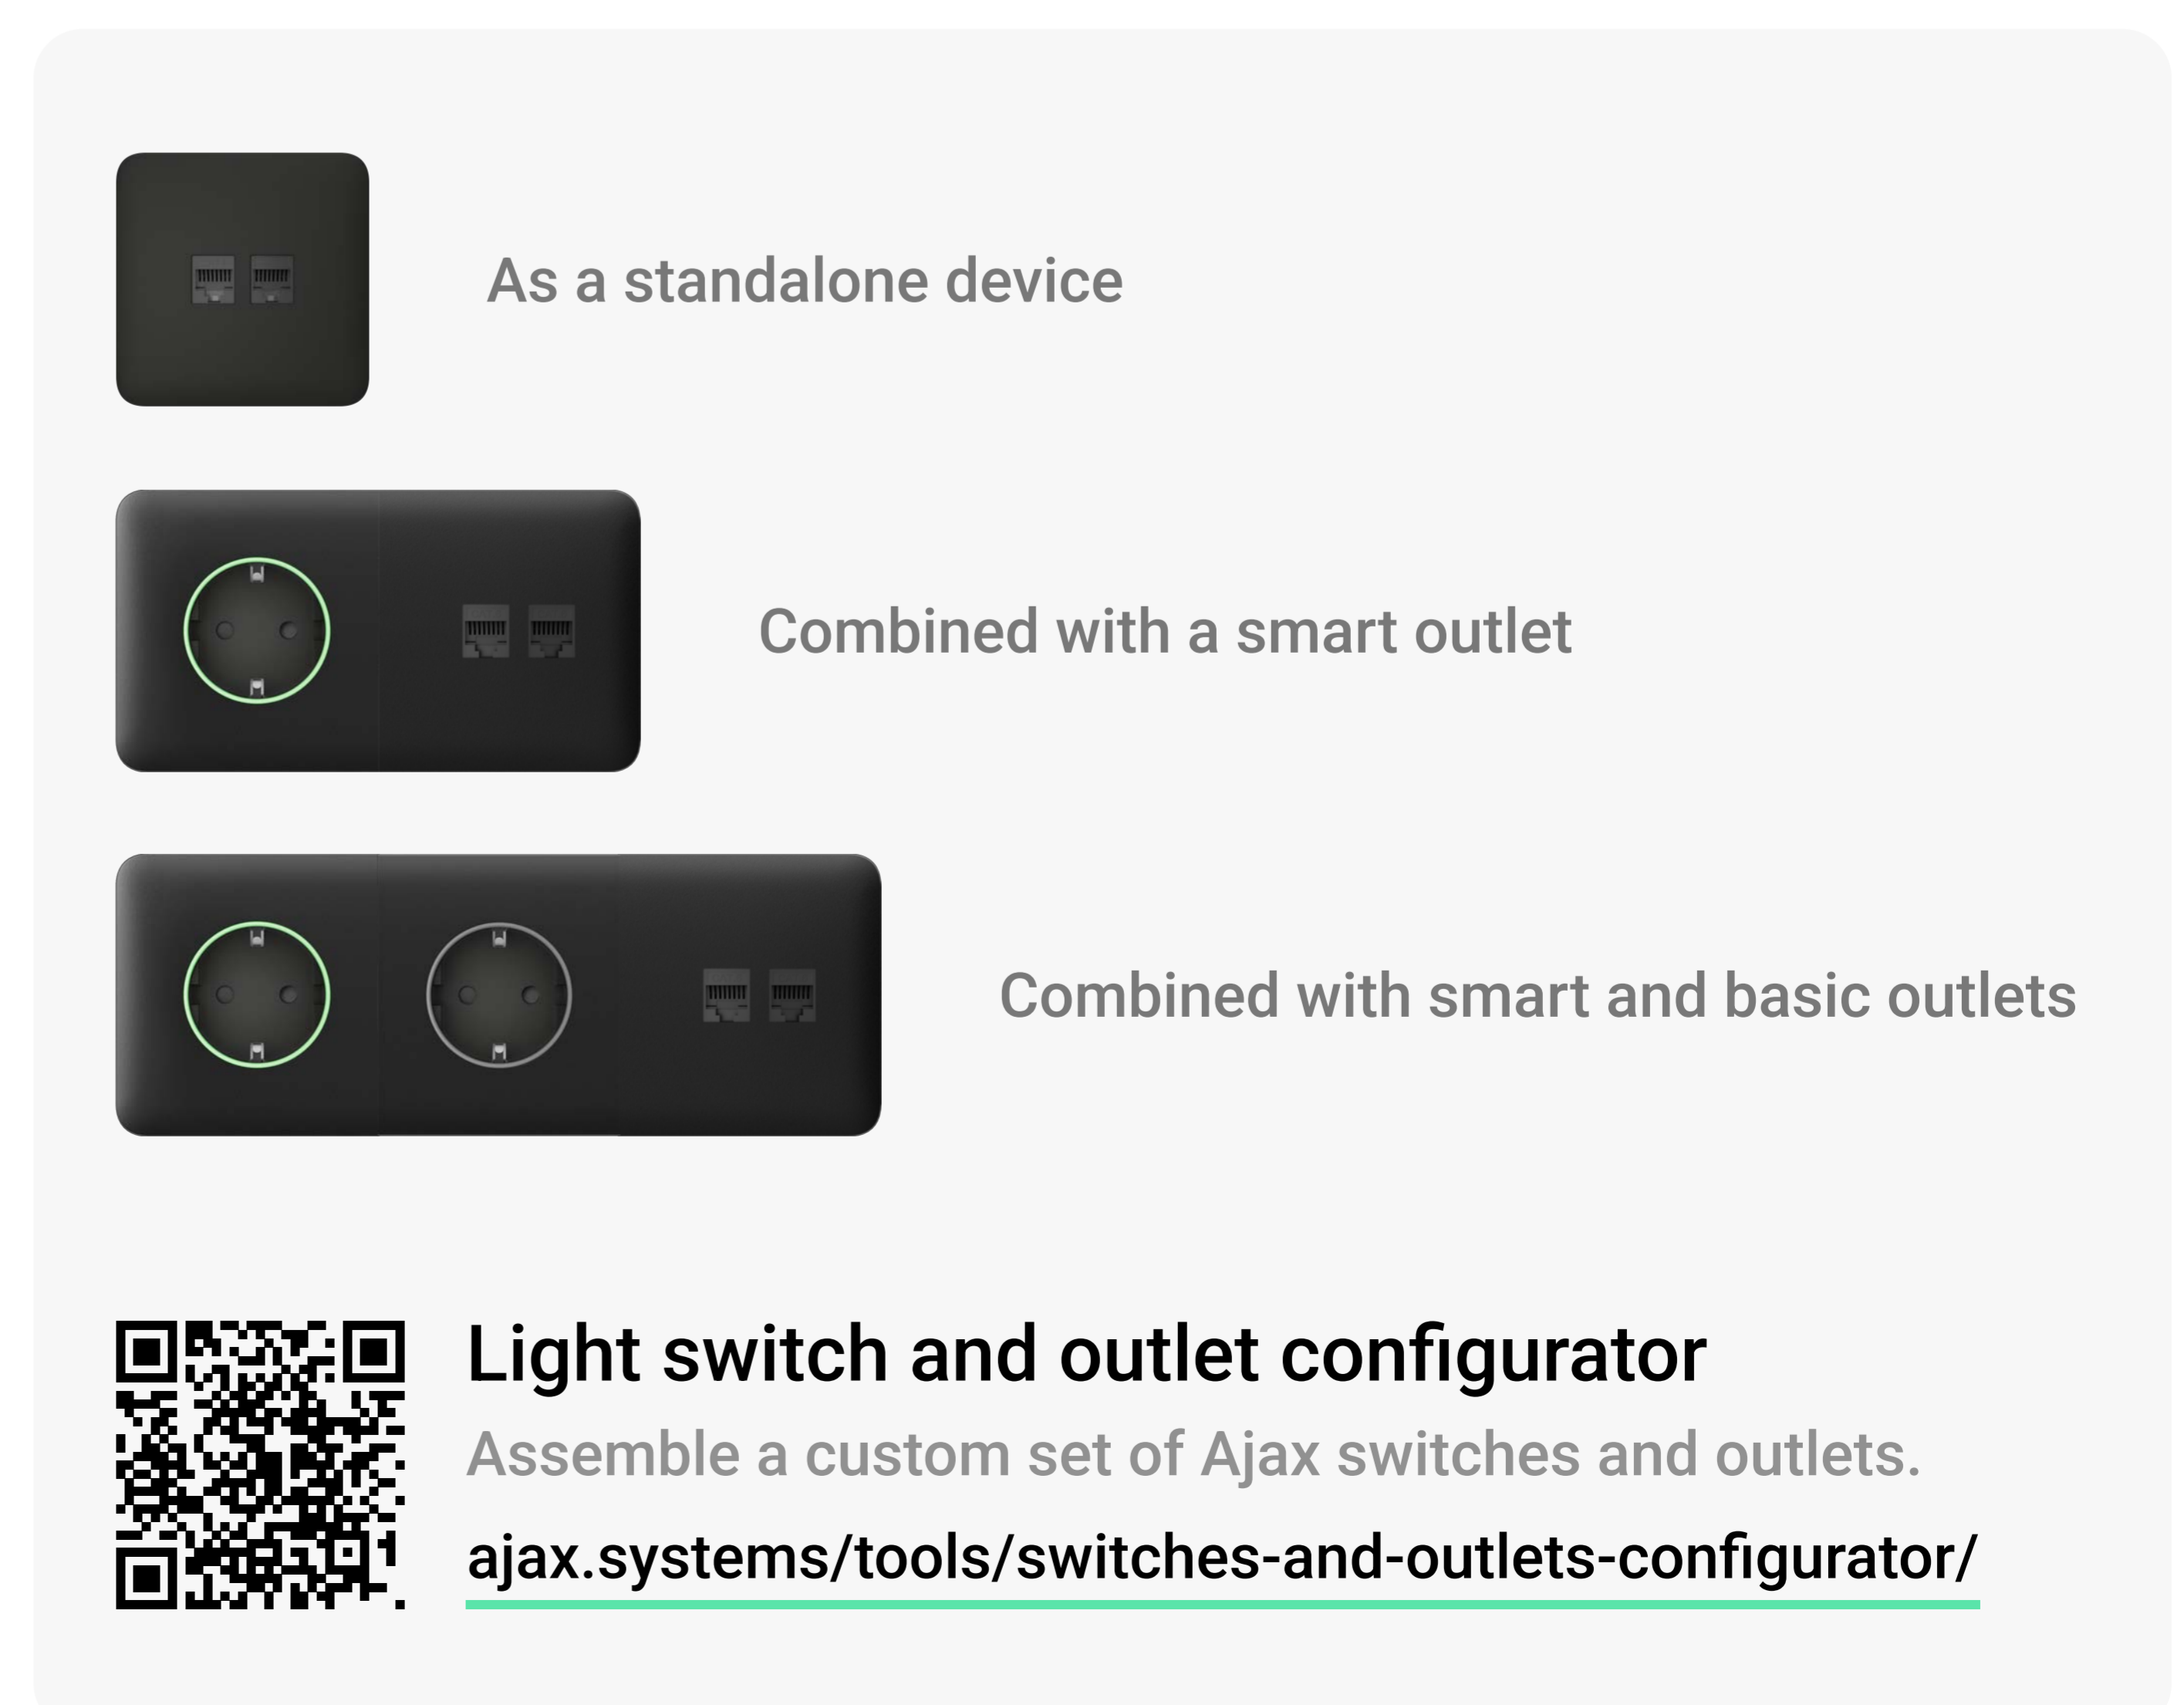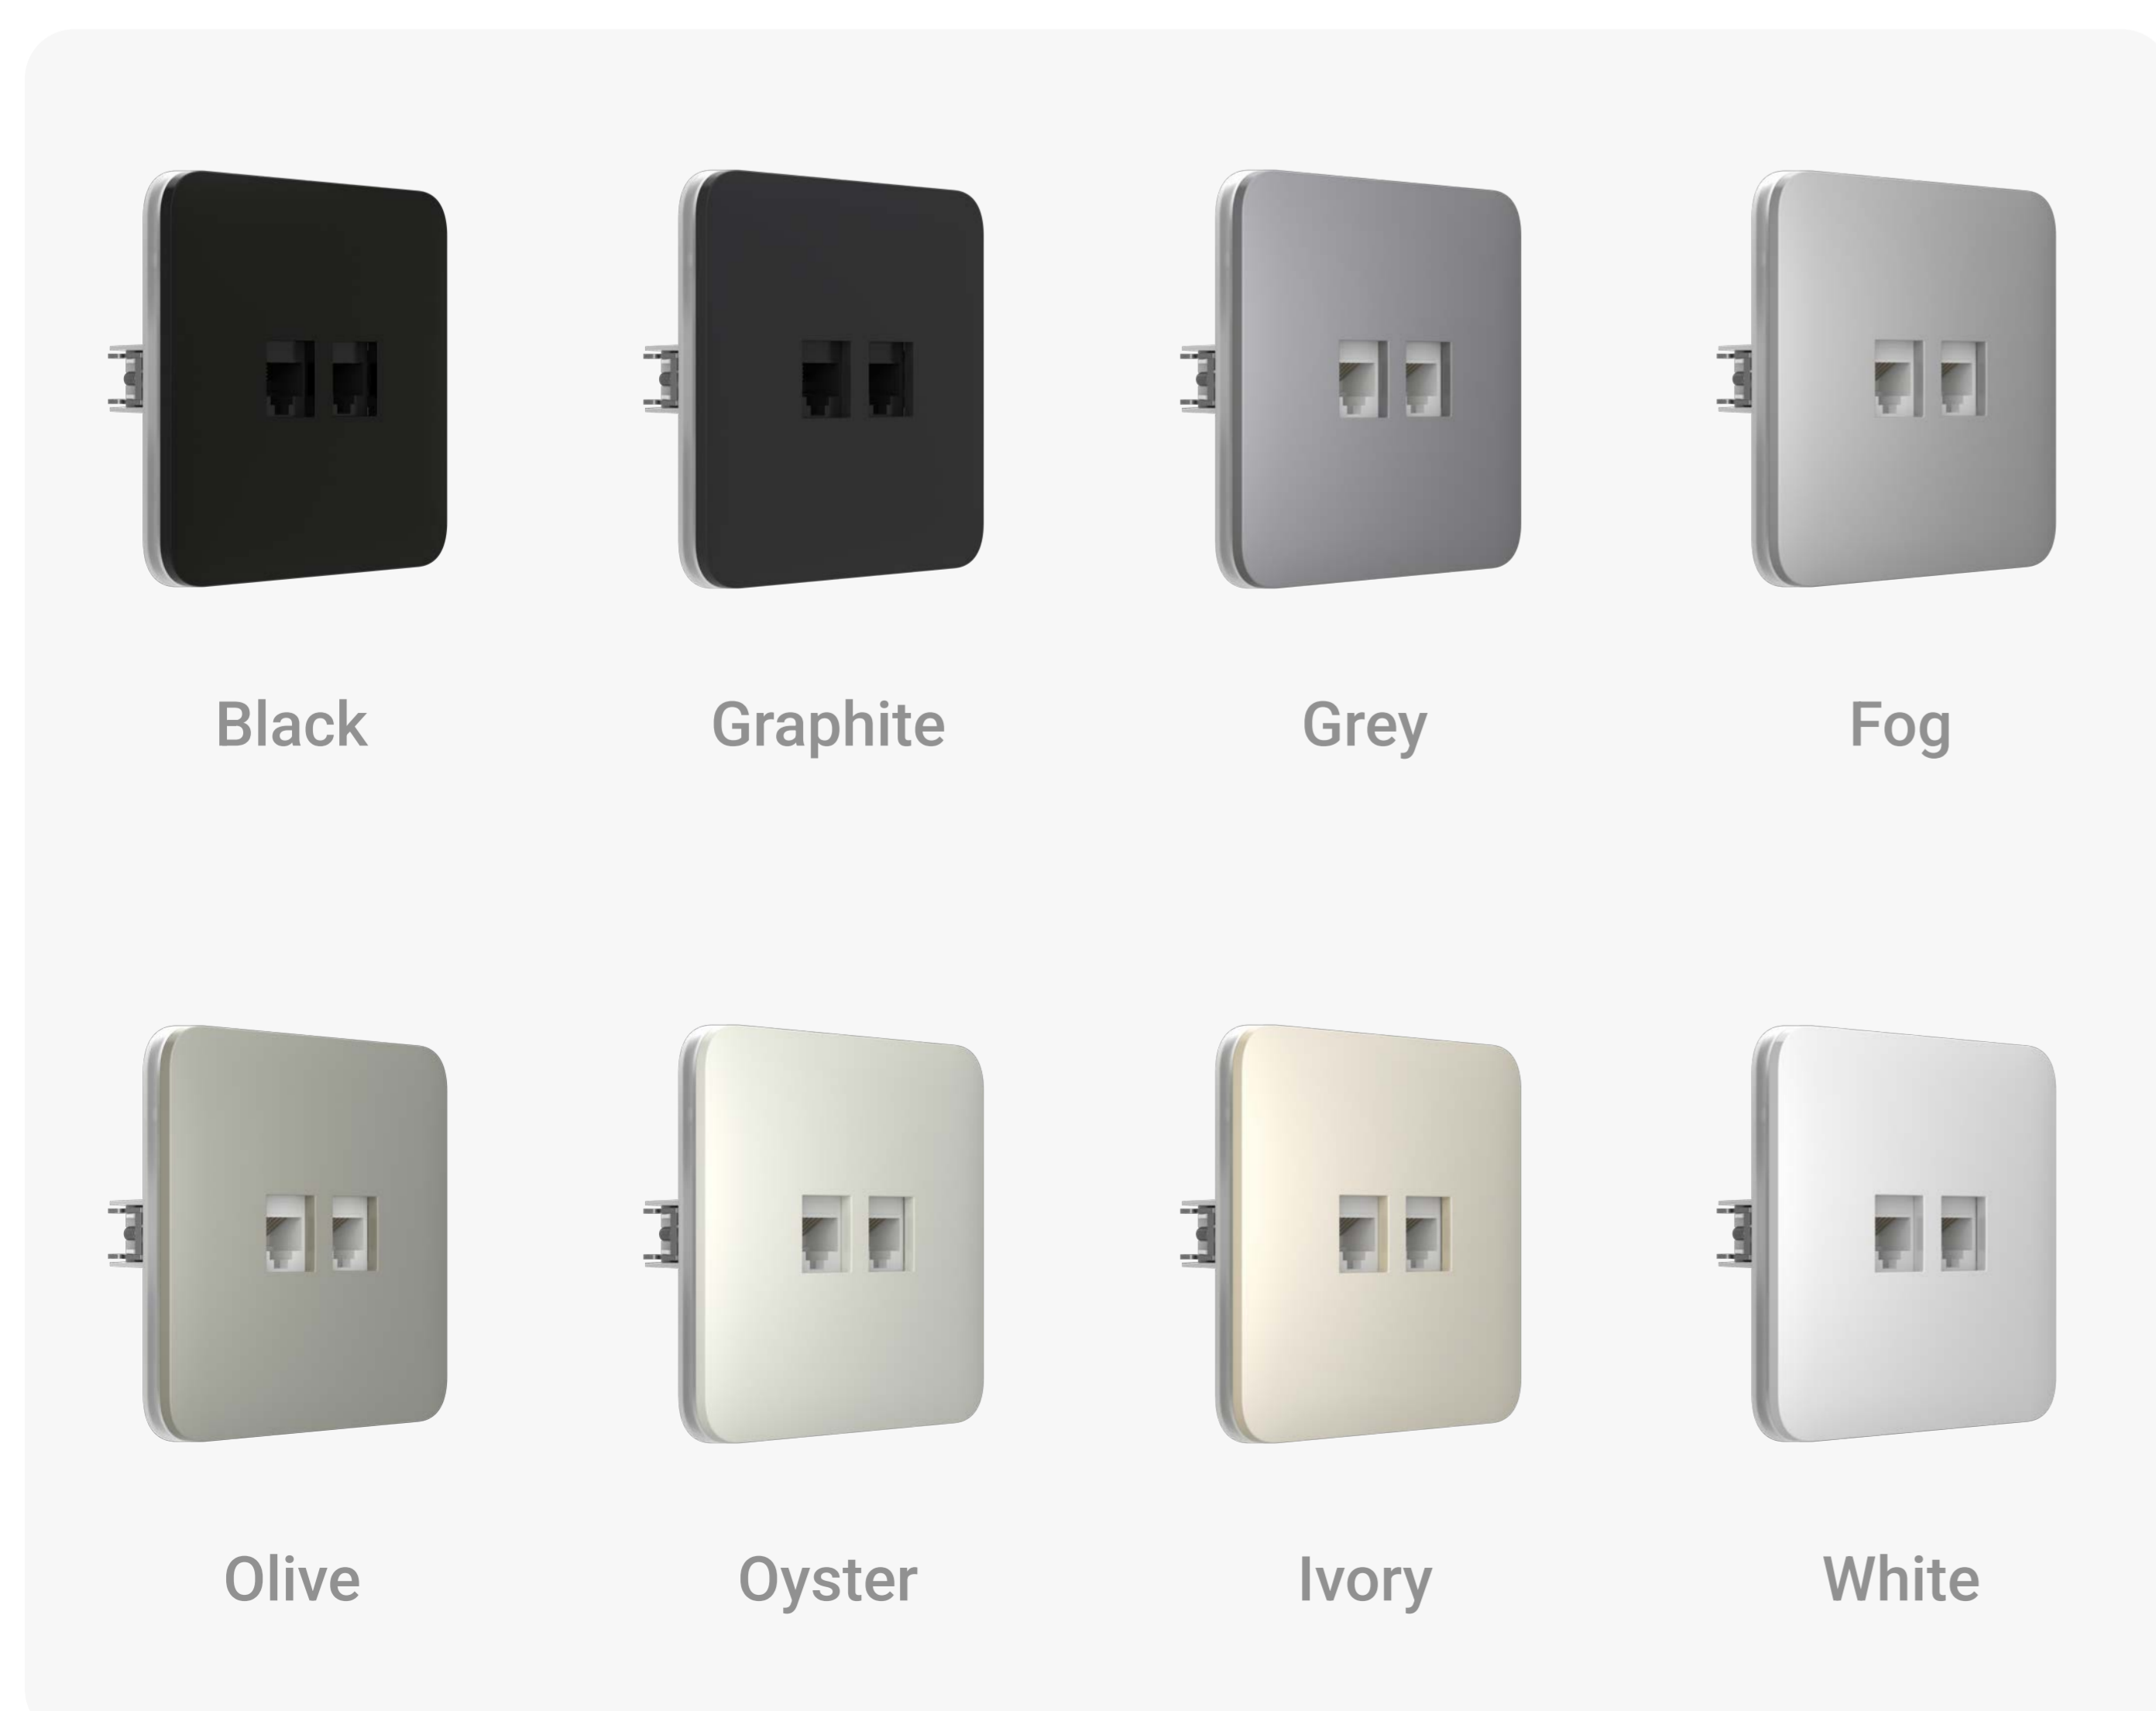



## Two ports for high-speed data transmission

The core of Outlet (LAN) features two separate Ethernet ports compatible with CAT.6 and CAT.5e cables. These cables support data transfer speeds of up to 1 Gbit/s over distances of up to 100 meters, which makes Outlet (LAN) ideal for high-bandwidth applications such as 4K video streaming. The ports are available in black or white, ensuring every part of the outlet blends seamlessly into the interior.



## Quick and easy installation




Outlet (LAN) can be installed without changing the standard mounting box and wiring. The outlet cover can easily be swapped for a different color if needed.

<h2>Installation</h2> <p><b>Operating temperature range</b> from −10 °C to +40 °C</p> <p><b>Operating humidity</b> up to 75%</p> <p><b>Protection class</b> IP20</p>		<h2>Single outlet components</h2> <p>Installed as a standalone device</p> <p><b>Core</b> OutletCore (LAN) [55]</p> <p><b>Cover</b> SoloCover (LAN)</p>		<h2>Combined outlet components</h2> <p>Installed with several devices side by side in one frame</p> <p><b>Cores</b> OutletCore (LAN) [55] OutletCore (LAN) vertical [55]</p> <p><b>Covers</b> SoloCover (LAN) CenterCover (LAN) CenterCover (LAN) vertical SideCover (LAN) SideCover (LAN) vertical</p> <p><b>Frames</b> Frame (2 seats) Frame (2 seats) vertical Frame (3 seats) Frame (3 seats) vertical Frame (4 seats) Frame (4 seats) vertical Frame (5 seats) Frame (5 seats) vertical</p>	
<h2>Weight</h2> <p><b>Cores</b> OutletCore (LAN) [55]40.1 g OutletCore (LAN) vertical [55]40.1 g</p> <p><b>Covers</b> SoloCover (LAN)14.1 g CenterCover (LAN)11.9 g CenterCover (LAN) vertical11.56 g SideCover (LAN)12.6 g SideCover (LAN) vertical12 g</p> <p><b>Frames</b> Frame (2 seats)16 g Frame (2 seats) vertical16 g</p> <p>Frame (3 seats)22 g Frame (3 seats) vertical22 g</p> <p>Frame (4 seats)28 g Frame (4 seats) vertical28 g</p> <p>Frame (5 seats)34 g Frame (5 seats) vertical34 g</p>			<h2>Dimensions</h2> <p><b>Cores</b> OutletCore (LAN) [55]78.3 × 74.4 × 37.5 mm OutletCore (LAN) vertical [55]75.5 × 74.4 × 37.5 mm</p> <p><b>Covers</b> SoloCover (LAN)82 × 82 × 9.25 mm CenterCover (LAN)82 × 70.5 × 9.25 mm CenterCover (LAN)70.5 × 82 × 9.25 mm SideCover (LAN)82 × 76.25 × 9.25 mm SideCover (LAN)76.25 × 82 × 9.25 mm</p> <p><b>Frames</b> Frame (2 seats)82.8 × 153.5 × 6.3 mm Frame (2 seats) vertical153.5 × 82.8 × 6.3 mm</p> <p>Frame (3 seats)82.8 × 224.5 × 6.3 mm Frame (3 seats) vertical224.5 × 82.8 × 6.3 mm</p> <p>Frame (4 seats)82.8 × 295.5 × 6.3 mm Frame (4 seats) vertical295.5 × 82.8 × 6.3 mm</p> <p>Frame (5 seats)82.8 × 366.5 × 6.3 mm Frame (5 seats) vertical366.5 × 82.8 × 6.3 mm</p>		

<sup>1</sup> Combinations with smart outlets are available only in horizontal orientation.



For detailed information, scan the QR code or follow the link:  
[ajax.systems/support/devices/outlet-lan/](https://ajax.systems/support/devices/outlet-lan/)

-  support@ajax.systems
-  @AjaxSystemsSupport\_Bot
-  ajax.systems