





## MultiRelay Fibra

Four-channel relay module with potential-free contacts to control power supply remotely.

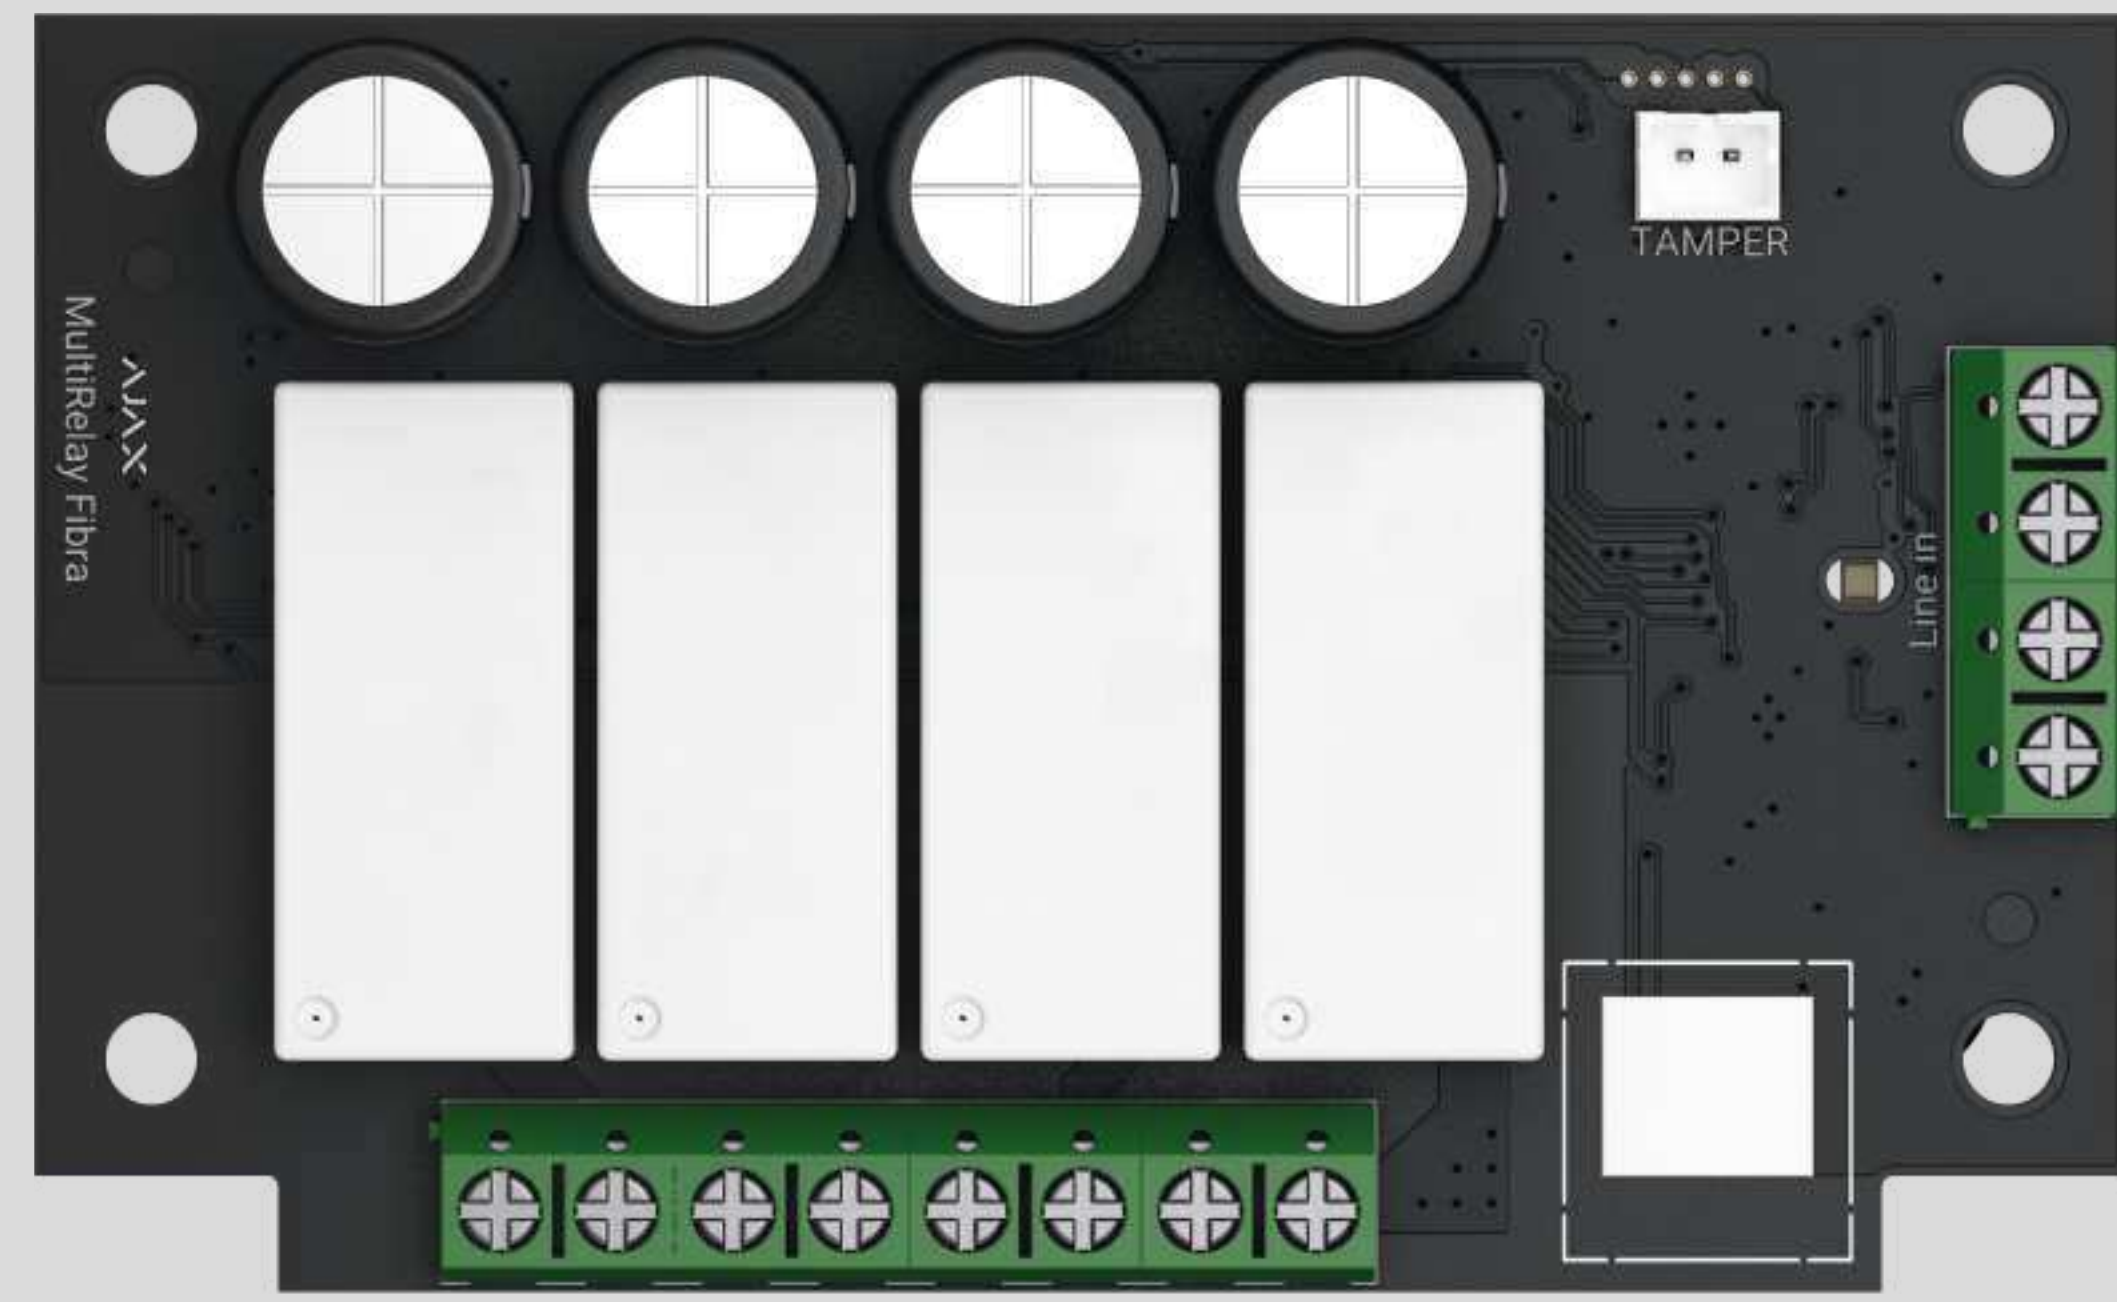


3  
GRADE  
EN 50131


MultiRelay Fibra is a device of the wired Fibra product line. Only accredited Ajax Systems partners can sell, install, and administer Fibra products.




Potential-free (dry) contacts



4 relay outputs



Low power consumption: up to 185 mW



Automation scenarios

## Operation modes


- **Bistable** — the relay changes contact state after each activation, turning the connected appliance on or off.
- **Pulse** — the relay changes contact state for the adjustable period of time (from 10 s to 2 h).

## Contact states

- **Normally closed (NC)** — the relay stops supplying power when activated and resumes when deactivated.
- **Normally open (NO)** — the relay supplies power when activated and stops when deactivated.

**Protection against overheating:** all four relays of MultiRelay are deactivated automatically the moment at least one of them exceeds +85°C.

**Steady contact state:** the current state of contacts remains the same after a power outage.



## Fibra communication technology


- Up to 2,000 m of wired communication
- Data is encrypted throughout the transmission process
- Regular polling to display current device statuses
- One line for different types of devices



## Sabotage resistance


- Tamper alarm<sup>1</sup>
- Protection against short circuit
- Device authentication to prevent spoofing





## Quick installation and setup

- Pairing with a hub via automatic line scanning or QR code
- Remote control and configuration in the app
- Easy maintenance
- Installing into Case<sup>2</sup> (sold separately)

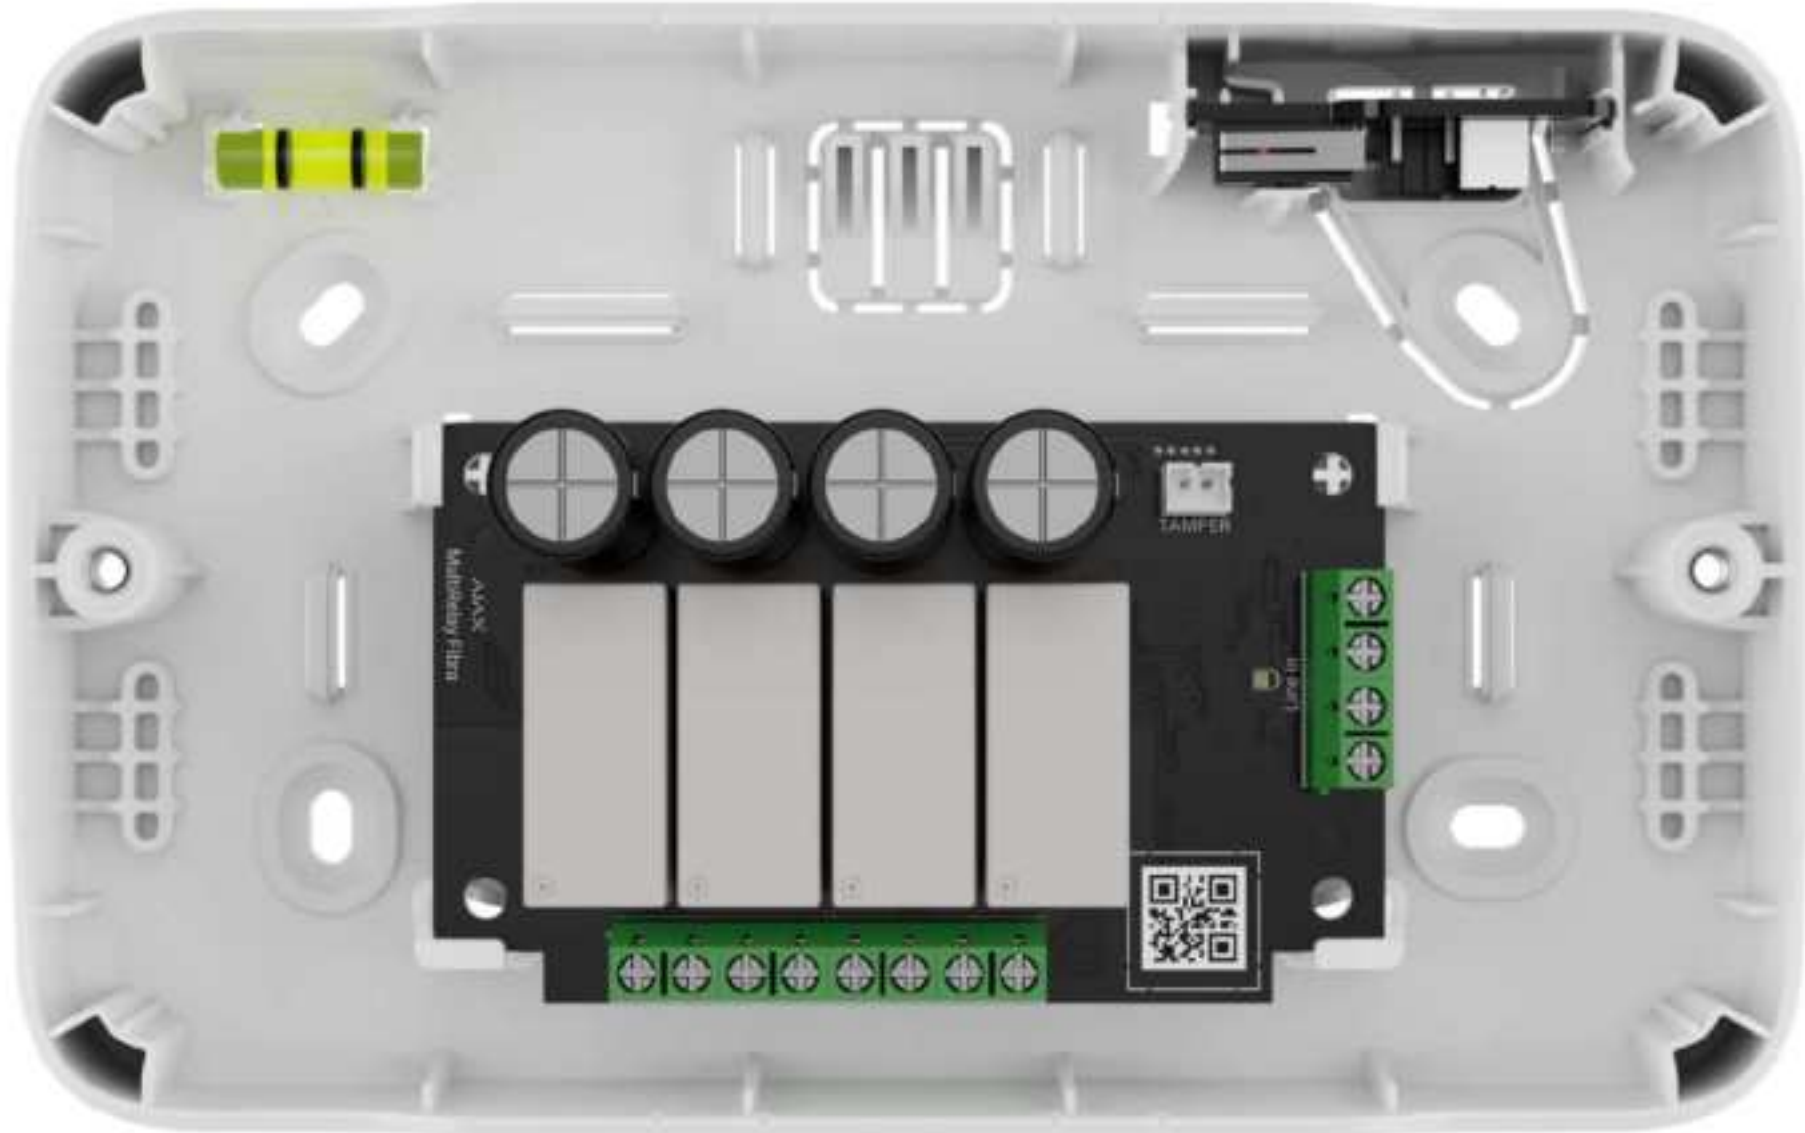

<b>Compliance</b>  EN 50131 (Grade3) EN 50130-5, EN 50130-4 EN 55032 EN 55035 EN 60669-1:2018	<b>Compatibility</b>  Hubs Hub Hybrid (2G) Hub Hybrid (4G)	<b>Communication with the control panel</b>  Fibra communication technology  Wired connection U/UTP cat.5 4×2×0.51 (copper conductor) signal cable 4×0.22 (copper conductor)  Communication range up to 2,000 m With U/UTP cat.5 4×2×0.51 cable	<b>Features</b>  Number of relays 4 relay outputs  Relay modes bistable, pulse  Operating time for pulse mode from 10 s to 2 h  Temperature protection over +85°C  Steady contact state If enabled, the current state of contacts remains the same after a power outage.
<b>Power supply</b>  Fibra line 8.5–30 V $\overline{\text{=}}$ , up to 185 mW The hub powers MultiRelay. The module does not supply additional power to connected appliances.  Maximum load current 5 A at 30 V $\overline{\text{=}}$ 10 A at 230 V $\sim$	<b>Installation</b>  Operating temperature range from –10°C to +40°C  Operating humidity up to 75%	<b>Board</b>  Dimensions 90 × 55 × 30 mm  Weight 84 g	<b>Complete set</b>  MultiRelay Fibra Quick start guide  Case is not included in the complete set and sold separately from the MultiRelay Fibra module.

1 — Notification about attempts to open Case or detach it from the surface. Available only when MultiRelay is installed into Case. Case is sold separately.

2 — Case has an optimal arrangement of wire channels, special holders for the module, and a tamper alarm. It’s available in different sizes to place one or several devices inside the casing. More details: [ajax.systems/products/fibra/case](https://ajax.systems/products/fibra/case)



For detailed information, scan the QR code or follow the link:  
[support.ajax.systems/manuals/multirelay-fibra/](https://support.ajax.systems/manuals/multirelay-fibra/)



support@ajax.systems



@AjaxSystemsSupport\_Bot



ajax.systems