

- Emergency lighting KIT
- False ceiling or inside the ceiling light installation or junction box
- Compatible with LED modules from 6Vdc to 60Vdc
- self-adaptive output voltage from 6V to 60V
- Selectable duration: 1h, 1.5h, 2h, 3h
- Output Power: 4W, 3W, 2W, 1.5W
- Max recharge time: 12h



- Inhibition and Rest Mode functions
- Available in 3 versions:
 - Standard
 - Self-test
 - BUS-supervised



ConvertLED



230 Vac

Commercial LED driver
60V max



CONVERTLED



During emergency discharging
phase, it provides 4W max to
LEDs, so output current decreases
by increasing LEDs number


4W provided
to LEDs



LED stripe



LED spot

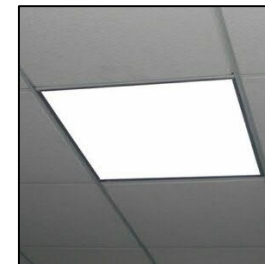


LED ceiling
light

ConvertLED



Maintained feature

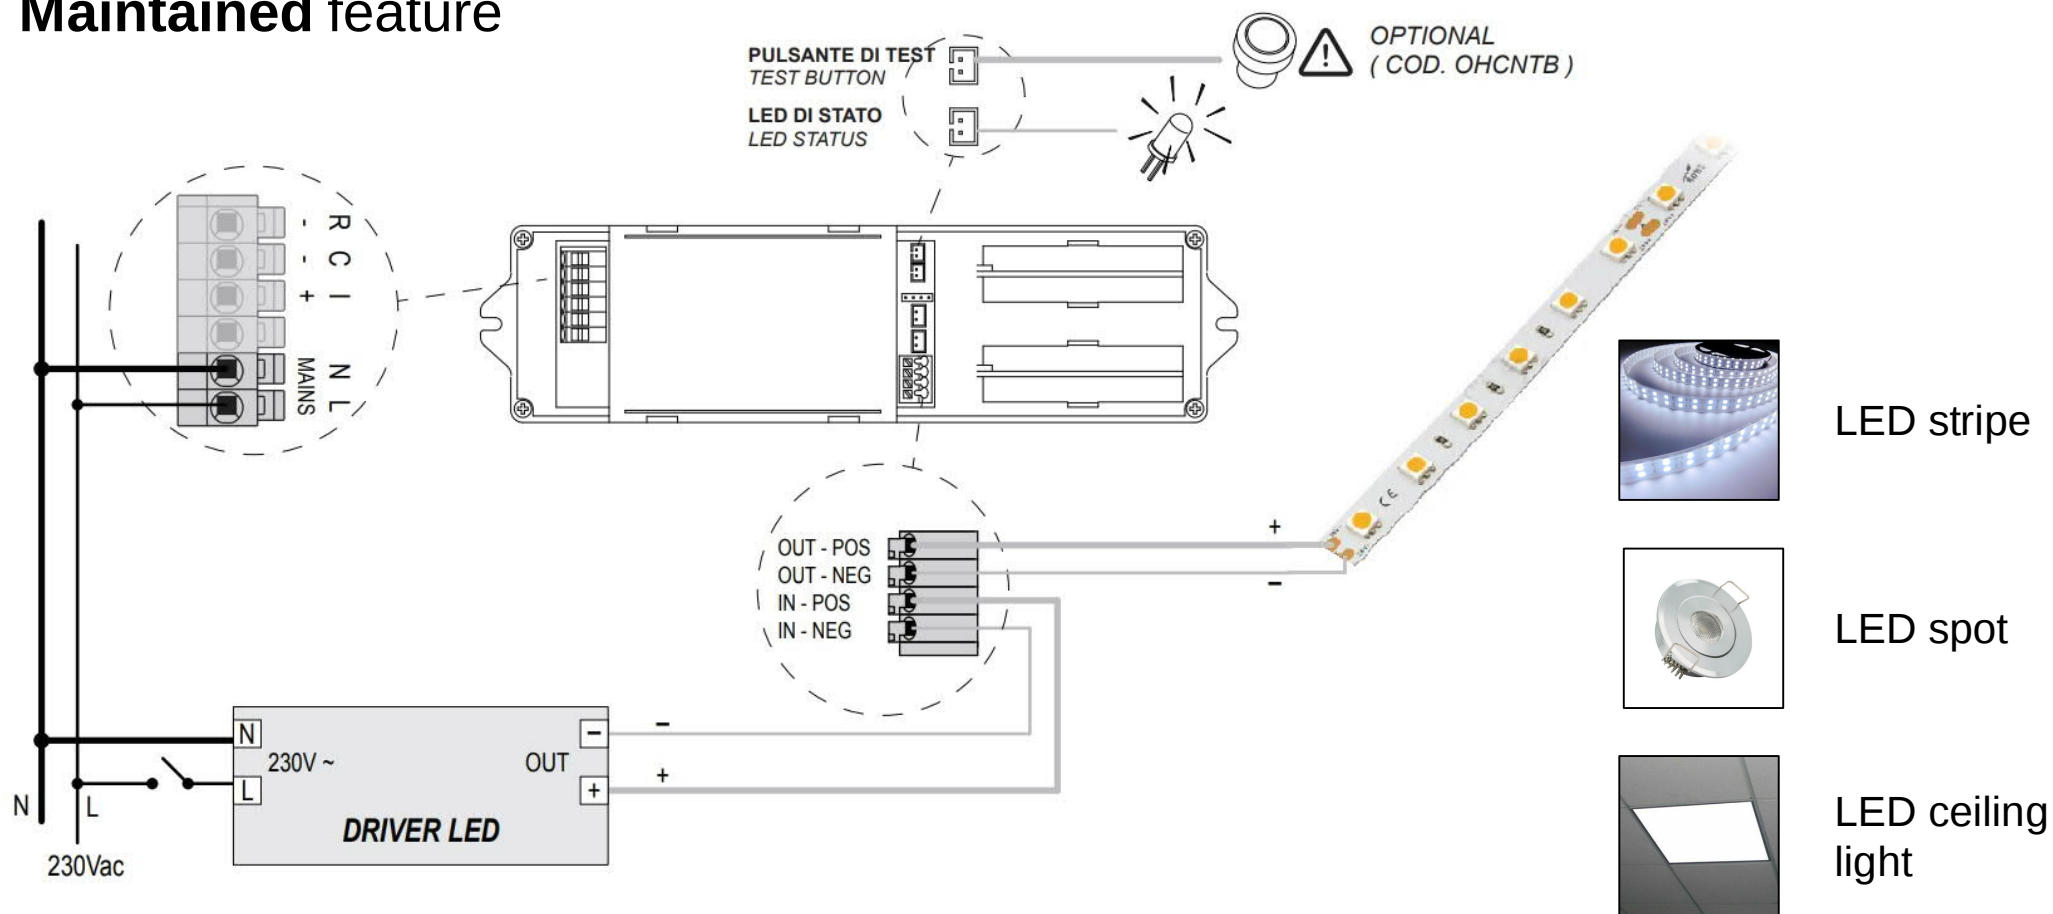

ConvertLED



Non-Maintained feature

