

D-TECT X

Motion Detector

The BS8418 compliant D-TECT X detectors all feature quad PIR sensor modules, stylish IP65 fully tampered housings with a discreet internal antenna. Units accept 2 x 3 volt CR123 batteries, 500m RF transmission range on 868MHz and individual code for pairing to the receiver.

The receiver (GJD392) can be linked in its base form to 4 detectors and this can then be expanded up to 16 detectors, with the use of the GJD393 4-way expansion module.

Due to the number of individual detector codes (in excess of 16M), multiple receivers can be used on any site.

FEATURES

- Adjustable pan and tilt
- Available in a range of beam lengths
- Discreet internal antenna
- Wireless technology
- Twin PIRs

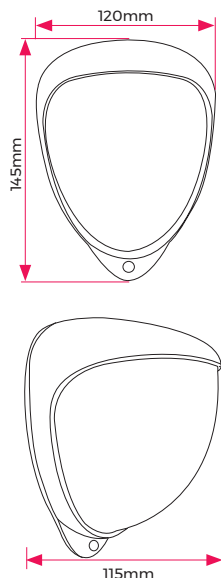
BENEFITS

- Modern design
- Easy to install
- Highly cost effective
- Great for temporary installations
- Aesthetically pleasing design

PRODUCT CODES

GJD430	D-TECT X 30m
GJD450	D-TECT X 50m

SPECIFICATIONS

**D-TECT X MKIII****Transmission Range**

500m Line of sight

Detection Range**GJD430** 30m x 30m **GJD450** 50m x 10m**Detector Orientation**

180° pan & 90° tilt

Mounting Height**GJD430** Up to 6m - Optimum 3m**GJD450** Up to 4m - Optimum 3m**Outputs from GJD392 D-TECT X Receiver - Per Detector**

1 Open Relay; 1 Closed Relay; Tamper; RF Loss; Low Battery, GJD Lighting System.

Power Input

2 x CR123, 3 volt batteries (Batteries not included)

Pulse Count

1 - 2

Photocell

Dusk (2 Lux) to 24 hour

Housing & IP Rating

High Impact ABS IP65

BS8418 Complaint

Yes

Accessories**GJD392** D-TECT X Receiver**GJD393** D-TECT X Expansion Unit**GJD394** D-TECT X Walk Tester**GJD397** D-TECT X Repeater**PMB1** Pole Mount Bracket

APPLICATIONS

Residential
Commercial
Government
Industrial
Transportation
Military Bases
Heritage

