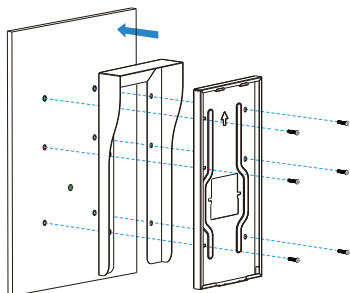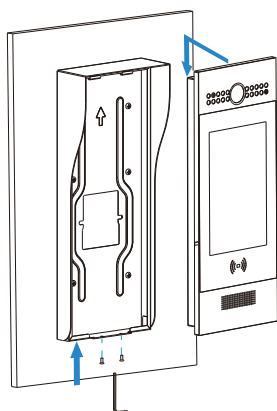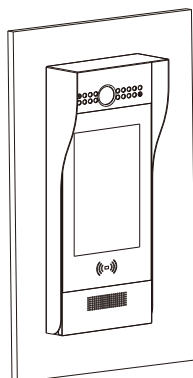## 1. On-wall installation

Combine the wall-mounting box with the rain cover and mark the six mounting hole positions on the wall. Drill the holes and insert the six plastic wall anchors into the holes according to regular device installation requirement. Then tighten the combined rain cover and the box securely on the wall using the six tapping screws (ST4x20).

Install the device on the wall-mounting box , press down the device and make sure that the two hang holes on its top are fully hanged on to the two square hooks on the top of the box, then tighten the two countersunk machine screws (M3x6) underneath the device using the Allen wrench attached with the device.

If the device cannot be easily hanged on to the square hooks, loosen the six cross screws (ST4x20) slightly, move up the rain cover a little bit to increase the clearance between the rain cover top and the box top. Then retighten the six screws before installing the device.

Installation completed.

## 2. In-wall installation



Install the embedded box on the wall according to its installation manual. Combine the flush-mounting bracket with the rain cover before tighteninig them securely on the wall using the 6 screws(M4x10) attached with the device.



Install the device on the flush-mounting bracket, press down the device and make sure that the two hang holes on its top are fully hanged on to the two square hooks on the top of the box, then tighten the two countersunk machine screws(M3x6) underneath the device using the Allen wrench attached with the device.

If the device cannot be easily hanged on to the square hooks, loosen the six socket head cap machine screws (M4x10) slightly, move up the rain cover a little bit to increase the clearance between the rain cover top and the bracket top. Then retighten the six screws before installing the device.



Installation completed.

### *Notice Information*