

UM105H


Universal home-automation module with 5 inputs/outputs

The UM105H is a universal home-automation module for intelligent, flexible management of home security and comfort functions. Thanks to its reduced size and compactness, it can be housed directly inside 503 flush-mount boxes or junction boxes without taking up precious space.

With the UM105H module it is possible to transform traditional electrical switches into home-automation controls in order to manage lights, access control and other customizable functions.

The module is equipped with 5 customizable IN/OUT terminals arranged on a pre-wired connector, it connects to the control panel BUS thus providing easy and reliable installation.

The UM105H is a reduced size and compact solution for integrating home-automation functions with a security system, enriching the home with greater comfort and functionality.

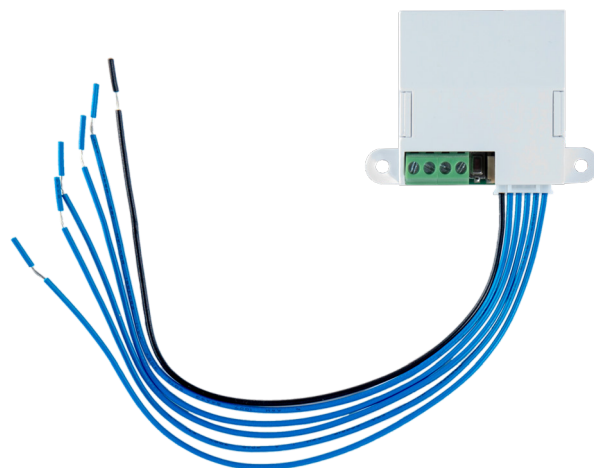


MAIN FEATURES

- Home-automation module on BUS
- Can be housed inside 503 boxes or junction boxes
- Status control of electrical switches
- Management of lights, access control and other customizable functions
- 5 IN/OUT terminals with pre-wired connector
- Compatible with PrimeX and Prime control panels (4.00 version or higher)


TECHNICAL SPECIFICATIONS

Voltage	from 9 to 15V DC 
Current draw	
typical	20 mA
maximum	30 mA
Maximum current draw available for OC terminal	250 mA
Operating environmental conditions	
temperature	from -10 to +40°C
relative humidity	≤ 75% without condensation
Security rating	3
Environmental class	II
Dimensions	
Flanges included	54 x 40 x 15 mm
Flanges not included	38 x 40 x 15 mm
wires	180 mm
Weight	15 g


DIMENSIONS

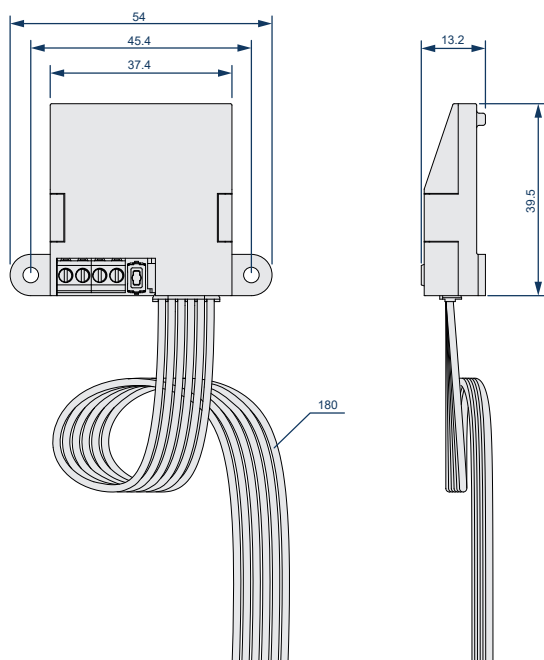

INSTALLATION

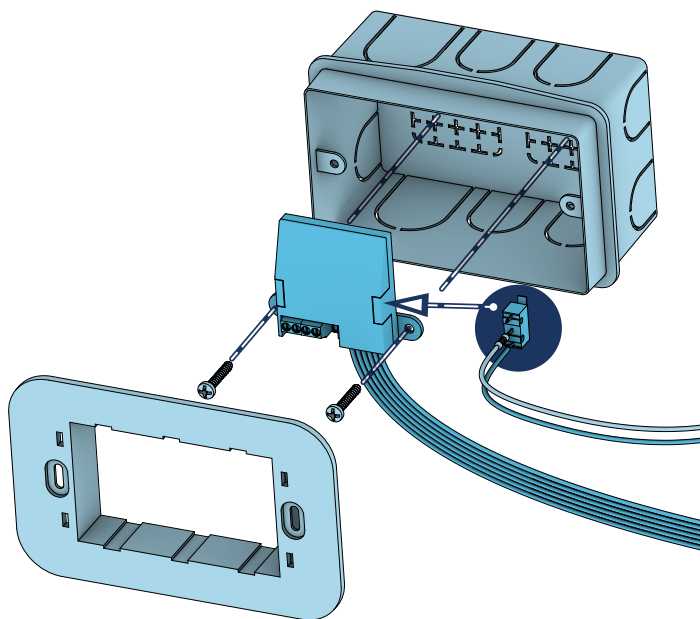

CONNECTIONS

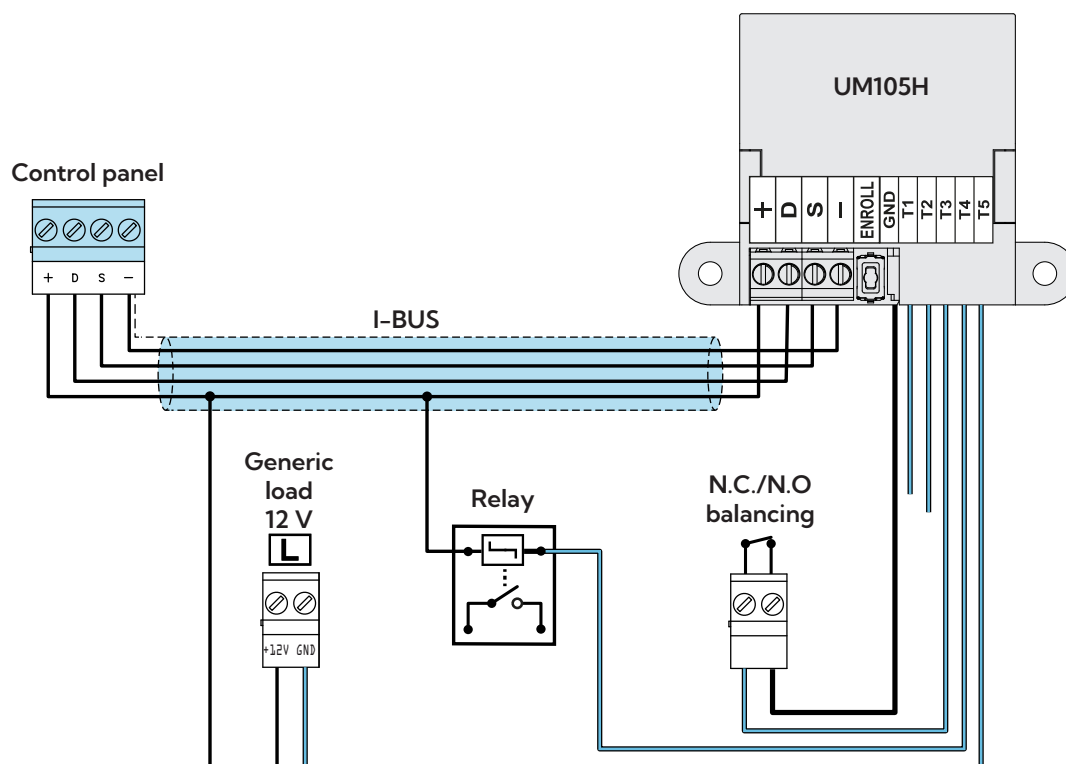

ORDER CODE

UM105H Universal home-automation module with 5 inputs/outputs