

# **Network Keyboard (1000 Series)**

## **Quick Start Guide**



# Foreword

## General

This manual introduces the functions and operations of the network keyboard.

## Safety Instructions

The following signal words might appear in the manual.

| Signal Words                                                                                     | Meaning                                                                                                                                            |
|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>WARNING</b> | Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.                                       |
|  <b>CAUTION</b> | Indicates a potential risk which, if not avoided, could result in property damage, data loss, reductions in performance, or unpredictable results. |
|  <b>NOTE</b>    | Provides methods to help you solve a problem or save time.                                                                                         |
|  <b>TIPS</b>    | Provides additional information as a supplement to the text.                                                                                       |

## Revision History

| Version | Revision Content                                                      | Release Time  |
|---------|-----------------------------------------------------------------------|---------------|
| V1.0.2  | Add USB mode switching, packet sniffing, log, step length, and wiper. | November 2024 |
| V1.0.0  | First release.                                                        | January 2022  |

## Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, audio, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

## Interface Declaration

This manual mainly introduces the relevant functions of the device. The interfaces used in its manufacture, the procedures for returning the device to the factory for inspection and for locating its faults are not described in this manual. Please contact technical support if you need information on these interfaces.

## About the Manual

- The manual is for reference only. Slight differences might be found between the manual and the product.
- We are not liable for losses incurred due to operating the product in ways that are not in compliance with the manual.
- The manual will be updated according to the latest laws and regulations of related jurisdictions. For detailed information, see the paper user's manual, use our CD-ROM, scan the QR code or visit

our official website. The manual is for reference only. Slight differences might be found between the electronic version and the paper version.

- All designs and software are subject to change without prior written notice. Product updates might result in some differences appearing between the actual product and the manual. Please contact customer service for the latest program and supplementary documentation.
- There might be errors in the print or deviations in the description of the functions, operations and technical data. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and company names in the manual are properties of their respective owners.
- Please visit our website, contact the supplier or customer service if any problems occur while using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

# Important Safeguards and Warnings

This section introduces content covering the proper handling of the device, hazard prevention, and prevention of property damage. Read carefully before using the device, comply with the guidelines when using it, and keep the manual safe for future reference.

## Transportation Requirements



Transport the device under allowed humidity and temperature conditions.

## Storage Requirements



Store the device under allowed humidity and temperature conditions.

## Installation Requirements



### ● Electrical Hazard

Preventive measures: Make sure the power is off when you put your hand into the device.

### ● Stability Hazard

Possible result: The rack might fall down and cause serious personal injury.

Preventive measures (including but not limited to):

- ◇ Before extending the rack to the installation position, read the installation instructions.
- ◇ When the Device is installed on the slide rail, do not place any load on it.
- ◇ Do not retract the slide rail while the Device is installed on it.



- Do not connect the power adapter to the device while the adapter is powered on.
- Strictly comply with the local electric safety code and standards. Make sure the ambient voltage is stable and meets the power supply requirements of the device.
- Do not connect the device to two or more kinds of power supplies, to avoid damage to the device.
- Use the standard power adapter or cabinet power supply. We will assume no responsibility for any injuries or damages caused by the use of a nonstandard power adapter.



- The device must be installed in a location that only professionals can access. Non-professionals are not allowed to enter the installation area.
- When installing the device, make sure that the power plug can be easily reached to cut off the power.
- Personnel working at heights must take all necessary measures to ensure personal safety including wearing a helmet and safety belts.
- Do not place the device in a place exposed to sunlight or near heat sources.
- Keep the device away from dampness, dust, and soot.

- Put the device in a well-ventilated place, and do not block its ventilation.
- Install the device on a stable surface to prevent it from falling.
- Please follow the electrical requirements to power the device.
  - ◇ Following are the requirements for selecting a power adapter.
    - The power supply must conform to the requirements of IEC 60950-1 and IEC 62368-1 standards.
    - The voltage must meet the SELV (Safety Extra Low Voltage) requirements and not exceed ES-1 standards.
    - When the power of the device does not exceed 100 W, the power supply must meet LPS requirements and be no higher than PS2.
  - ◇ We recommend using the power adapter provided with the device.
  - ◇ When selecting the power adapter, the power supply requirements (such as rated voltage) are subject to the device label.
- The device is a class I electrical appliance. Make sure that the power supply of the device is connected to a power socket with protective earthing.
- Cut all network and cable connections before cutting off the power.
- Use the power cords that are recommended for the region and conform to the rated power specifications.
- When installing the device, make sure that the power plug and appliance coupler can be easily reached to cut off power.
- The appliance coupler is a disconnection device. Keep it at a convenient angle when using it.

## Operation Requirements



-   The Device or remote control contains button batteries. Do not swallow the batteries due to the risk of chemical burns.  
Possible result: The swallowed button battery can cause serious internal burns and death within 2 hours.  
Preventive measures (including but not limited to):
  - ◇ Keep new and used batteries out of reach of children.
  - ◇ If the battery compartment is not securely closed, stop using the product immediately and keep out of reach of children.
  - ◇ Seek immediate medical attention if a battery is believed to be swallowed or inserted inside any part of the body.
- Battery Pack Precautions  
Preventive measures (including but not limited to):
  - ◇ Do not transport, store or use the batteries in high altitudes with low pressure and environments with extremely high and low temperatures.
  - ◇ Do not dispose the batteries in fire or a hot oven, or mechanically crush or cut the batteries to avoid an explosion.
  - ◇ Do not leave the batteries in environments with extremely high temperatures to avoid explosions and leakage of flammable liquid or gas.
  - ◇ Do not subject the batteries to extremely low air pressure to avoid explosions and the leakage of flammable liquid or gas.



#### WARNING

- Operating the device in a domestic environment may cause radio interference.
- Place the device in a location that children cannot easily access.
-  High Current  
Preventative measure: Ground the screw of the device to protective ground before you power it on.
-  Do not use multiple devices together to avoid generating high current.  
Preventative measure: Ground the device to protective ground before you power it on.



- Make sure that the power supply is correct before use.
- Do not unplug the power cord on the side of the device while the adapter is powered on.
- The rated current of the device is 2 A and the rated power is 24 W. Operate the device within the rated range of power input and output.
- Use the device under allowed humidity and temperature conditions.
- Do not drop or splash liquid onto the device, and make sure that there is no object filled with liquid on the device to prevent liquid from flowing into it.
- Do not disassemble the device without professional instruction.
- Put the device in a well-ventilated place, and do not block its ventilation.
- Do not place an open flame on the device, such as a lit candle.

## Maintenance Requirements



#### DANGER

- Replacing unwanted batteries with the wrong type of new batteries might result in explosion.  
Preventive measures (including but not limited to):
  - ◇ Replace unwanted batteries with new batteries of the same type and model to avoid the risk of fire and explosion.
  - ◇ Dispose of the old batteries as instructed.
- Power off the device before maintenance.



Do not expose the battery to extremely hot environments, such as direct sunlight and fire. Improper use of the battery might result in a fire or explosion.

# Table of Contents

|                                          |     |
|------------------------------------------|-----|
| Foreword .....                           | I   |
| Important Safeguards and Warnings.....   | III |
| 1 Overview .....                         | 1   |
| 1.1 Functions .....                      | 1   |
| 1.2 Structure .....                      | 1   |
| 1.2.1 Front Panel.....                   | 1   |
| 1.2.2 Rear Panel.....                    | 4   |
| 2 Powering On and Off .....              | 5   |
| 2.1 Powering On.....                     | 5   |
| 2.2 Powering Off .....                   | 5   |
| 3 Menu Operations .....                  | 6   |
| 3.1 Menu Introduction .....              | 6   |
| 3.2 Menu Settings .....                  | 6   |
| 3.2.1 System.....                        | 7   |
| 3.2.1.1 Time Setting .....               | 7   |
| 3.2.1.2 NTP Setting .....                | 7   |
| 3.2.1.3 Network Setting .....            | 8   |
| 3.2.1.4 Address Setting .....            | 8   |
| 3.2.1.5 Auxiliary Setting.....           | 8   |
| 3.2.1.6 Language Setting.....            | 9   |
| 3.2.1.7 Debug Setting.....               | 9   |
| 3.2.1.8 Login Mode .....                 | 11  |
| 3.2.1.9 Joystick Counting .....          | 11  |
| 3.2.2 Zone (Control Point).....          | 12  |
| 3.2.3 Account.....                       | 12  |
| 3.2.3.1 Changing the Password.....       | 13  |
| 3.2.3.2 Adding Users .....               | 13  |
| 3.2.3.3 Deleting Users .....             | 14  |
| 3.2.4 Configuration .....                | 14  |
| 3.2.4.1 Clearing Zones.....              | 14  |
| 3.2.4.2 Default.....                     | 14  |
| 3.2.4.3 Clearing One Zone.....           | 15  |
| 3.2.4.4 Deleting Zone .....              | 15  |
| 3.2.5 Software Information .....         | 15  |
| 3.3 Zone Control .....                   | 16  |
| 4 Controlling the Speed Dome Camera..... | 17  |
| 4.1 Keyboard Connection.....             | 17  |
| 4.1.1 RS-485 Port Connection .....       | 17  |

|                                                        |    |
|--------------------------------------------------------|----|
| 4.1.2 Network Connection .....                         | 18 |
| 4.2 Keyboard Operations .....                          | 18 |
| 4.2.1 Aperture/Focus/Zoom .....                        | 18 |
| 4.2.2 Preset .....                                     | 18 |
| 4.2.2.1 Setting a Preset .....                         | 18 |
| 4.2.2.2 Using a Preset .....                           | 19 |
| 4.2.3 Scan .....                                       | 19 |
| 4.2.3.1 Setting a Scan .....                           | 19 |
| 4.2.3.2 Performing a Scan .....                        | 20 |
| 4.2.4 Pan .....                                        | 20 |
| 4.2.5 Tour .....                                       | 21 |
| 4.2.5.1 Setting a Tour .....                           | 21 |
| 4.2.5.2 Performing a Tour .....                        | 22 |
| 4.2.6 Pattern .....                                    | 22 |
| 4.2.6.1 Setting a Pattern .....                        | 22 |
| 4.2.6.2 Using a Pattern .....                          | 23 |
| 4.2.7 Step .....                                       | 23 |
| 4.2.8 Brush .....                                      | 23 |
| 4.3 Multi-Channel Speed Dome Control .....             | 24 |
| 5 Controlling the DVR .....                            | 25 |
| 5.1 Network Connection .....                           | 25 |
| 5.2 Keyboard Operations .....                          | 25 |
| 5.2.1 Logging in to the DVR .....                      | 25 |
| 5.2.2 General functions .....                          | 25 |
| 6 Controlling the Display Control Devices .....        | 27 |
| 7 Controlling the DSS Pro .....                        | 30 |
| Appendix 1 RJ-45 Network Port Connection .....         | 33 |
| Appendix 2 Operations of Display Control Devices ..... | 34 |
| Appendix 2.1 Adding Channels .....                     | 34 |
| Appendix 2.1.1 Network Signal .....                    | 34 |
| Appendix 2.1.2 Local Signal .....                      | 36 |
| Appendix 2.2 Adding Video Walls .....                  | 37 |
| Appendix 3 Cybersecurity Recommendations .....         | 41 |

# 1 Overview

## 1.1 Functions

- At least 64 users (including admin user) can be added to each keyboard, and each user can control up to 2048 devices.
- Connects to devices through the local network, RS-232, RS-485, USB port and more.
- Supports PTZ operations such as zoom, focus, iris, preset, tour and pattern.
- Devices and displays can both be controlled, including decoders, video matrix platforms, and embedded multi-screen controllers.
- PTZ cameras, DVR and NVR can all be controlled through the local network.
- DSS Pro Client can be controlled through USB port. The control functions of other DSS platforms can be customized.
- Supports basic functions such as window split and switching between channels.
- Supports third-party platform access. The third-party platform cannot access the keyboard through API and SDK, only the USB protocol is available.
- Offers visualized menus and user-friendly functions.

## 1.2 Structure

### 1.2.1 Front Panel

Figure 1-1 Front panel



Table 1-1 Front panel description

| No. | Function         |        | Description                                                                                                                                                                                                                                                                                                        |
|-----|------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | LCD Screen       | –      | Displays the keyboard menu.                                                                                                                                                                                                                                                                                        |
| 2   | Indicators       | PWR    | Power indicator. It is solid red when the power is connected properly.                                                                                                                                                                                                                                             |
|     |                  | RX/TX  | Data transceiver indicator. It flashes green when data is being transmitted.                                                                                                                                                                                                                                       |
|     |                  | NET    | Network activity indicator. It is solid green when the network is connected properly.                                                                                                                                                                                                                              |
|     |                  | 232    | The indicator flashes green when RS-232 data is being transmitted.                                                                                                                                                                                                                                                 |
|     |                  | 485    | The indicator flashes green when RS-485 data is being transmitted.                                                                                                                                                                                                                                                 |
|     |                  | USB    | USB indicator. It flashes green when the keyboard is connected with computers through USB.                                                                                                                                                                                                                         |
| 3   | 3D joystick      | –      | Select and operate menus.                                                                                                                                                                                                                                                                                          |
| 4   | TPZ control area | IRIS   | Control the iris.                                                                                                                                                                                                                                                                                                  |
|     |                  | FOCUS  | Control the focus.                                                                                                                                                                                                                                                                                                 |
|     |                  | ZOOM   | Control the zoom.                                                                                                                                                                                                                                                                                                  |
|     |                  | MENU   | The speed dome menu.<br><ul style="list-style-type: none"> <li>● Select the <b>Set</b> mode, and then press the MENU key to enter the speed dome menu.</li> <li>● Select the <b>Use</b> mode, and then press MENU to clear the input box.</li> </ul>                                                               |
|     |                  | PRESET | Set and use a preset.<br><ul style="list-style-type: none"> <li>● Select the <b>Set</b> mode, press a number key and then press the PRESET key to set a preset.</li> <li>● Select the <b>Use</b> mode, press 5 + PRESET to use No. 5 preset.</li> </ul>                                                            |
|     |                  | SCAN   | Set and use a scan.<br><ul style="list-style-type: none"> <li>● Select the <b>Set</b> mode, and then press the SCAN key to enter the <b>Scan set</b> screen.</li> <li>● Select the <b>Use</b> mode, press a number and then press SCAN to perform a predefined scan. Press SCAN again to stop the scan.</li> </ul> |
|     |                  | PAN    | Start and stop a pan.                                                                                                                                                                                                                                                                                              |

| No. | Function                 |         | Description                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|--------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     |                          | TOUR    | <p>Set and use a tour.</p> <ul style="list-style-type: none"> <li>● Select the <b>Set</b> mode, and then press the TOUR key to enter the <b>Tour</b> screen.</li> <li>● Select the <b>Use</b> mode, press a number and then press TOUR to perform a predefined tour. Press TOUR again to stop the tour.</li> </ul>                                                                                                  |
|     |                          | PATTERN | <p>Set and use a pattern.</p> <ul style="list-style-type: none"> <li>● Select the <b>Set</b> mode and then press PATTERN to go to the <b>Pattern</b> screen.</li> <li>● Select the <b>Use</b> mode, press a number and then press PATTERN to use a preset pattern. Press PATTERN again to stop the pattern.</li> </ul>                                                                                              |
| 5   | Display and control area | ID      | Quickly search for and connect the keyboard to the devices. When successfully connected, press ID to disconnect.                                                                                                                                                                                                                                                                                                    |
|     |                          | MULT    | Control window split.                                                                                                                                                                                                                                                                                                                                                                                               |
|     |                          | AUX     | Auxiliary key.                                                                                                                                                                                                                                                                                                                                                                                                      |
|     |                          | FN      | Function key. It is usually used with the number keys.                                                                                                                                                                                                                                                                                                                                                              |
|     |                          | PTZ     | <ul style="list-style-type: none"> <li>● When the keyboard is connected to the network video recorder (NVR), digital video recorder (DVR) and XVR (NVR + DVR), this key is used to select and control the channel PTZ.</li> <li>● When the keyboard is connected to the video matrix platform (VMP), network video decoder (NVD), display control devices, this key is used to select a specific window.</li> </ul> |
|     |                          | PLAY    | <ul style="list-style-type: none"> <li>● DVR video playback is a reserved function.</li> <li>● Select the specified screen. For example, 5+Screen: Select the output screen with the number 5.</li> </ul>                                                                                                                                                                                                           |
|     |                          | CAM     | <p>Control the channel.</p> <ul style="list-style-type: none"> <li>● 0 + CAM: Close the current video source.</li> <li>● 1 + CAM: Display the No.1 video source on the wall.</li> </ul>                                                                                                                                                                                                                             |
| 6   | General function area    | ESC     | <ul style="list-style-type: none"> <li>● Cancel and return. When entering characters, press the ESC key to delete one character at a time.</li> <li>● When playing back a video, press ESC to revert to the real-time monitoring page.</li> </ul>                                                                                                                                                                   |

| No. | Function |       | Description                                                                                                                                                                                                                                                                                                                           |
|-----|----------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     |          | SETUP | Shift modes.<br>Press SETUP to switch between the set mode and the use mode.                                                                                                                                                                                                                                                          |
|     |          | SHIFT | <ul style="list-style-type: none"> <li>Shift the keyboard input method, supports number, uppercase and lowercase letters, and characters.</li> <li>Under the control mode, press and hold the SHIFT key, and then the device restarts, supporting switching between HID Keyboard Device and HID-compliant game controller.</li> </ul> |
|     |          | ENTER | In the keyboard menu, press the ENTER key to confirm the previous operation.                                                                                                                                                                                                                                                          |
|     |          | 0-9   | To enter numbers, lowercase letters, uppercase letters and symbols. You can press the SHIFT key to switch the input method.                                                                                                                                                                                                           |

## 1.2.2 Rear Panel

Figure 1-2 Rear panel

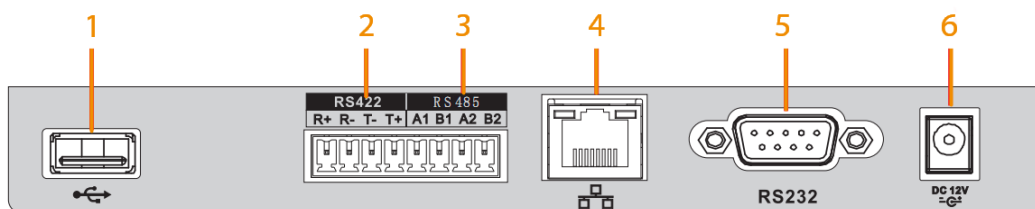


Table 1-2 Rear panel description

| No. | Name         | Description                                                                                                                                                                                                                                                                                                                           |
|-----|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | USB port     | <ul style="list-style-type: none"> <li>Control mode: Connect the keyboard to the computer through USB port to control the SmartPSS and DSS Pro platforms.</li> <li>Storage mode: Support for FAT32 formatted USB drives to enable functions such as packet capturing, log, configuration export, and configuration import.</li> </ul> |
| 2   | RS-422 port  | Reserved port. RS-422 port can be directly connected to a device with RS-422 port.                                                                                                                                                                                                                                                    |
| 3   | RS-485 port  | The standard transmission distance of the RS-485 port is 1200 m (9600 bps), but it can reach maximum 3000 m in reality.                                                                                                                                                                                                               |
| 4   | Network port | The keyboard can be connected with the DVR and speed dome camera through the network port.                                                                                                                                                                                                                                            |
| 5   | RS-232 port  | RS-232 port can be directly connected to a device with RS-232 port, but the distance should be within 10 m.                                                                                                                                                                                                                           |
| 6   | Power port   | The keyboard connects to 12 VDC power supply, and you can use the power adapter included in the accessories.                                                                                                                                                                                                                          |

## 2 Powering On and Off

### 2.1 Powering On

#### Procedure

- Step 1 Power on the keyboard and the power indicator light is on.  
The welcome screen appears.




The boot screen supports customization.

- Step 2 Configure you own password and confirm the admin password to initialize the keyboard.



- Users need to set and keep their own passwords properly.
- The password must consist of 8 characters, and must be a combination of numbers and letters. Press SHIFT on the keyboard to switch the keyboard input method.
- When entering the password, you can delete one character by moving the joystick to the left for one time.

Figure 2-1 Initialization

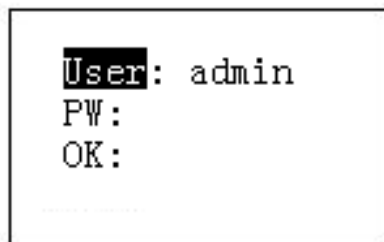

- Step 3 After initialization, enter the password to log in to the keyboard.

- Step 4 Press ENTER to enter the keyboard menu.

### 2.2 Powering Off

After exiting the system, you can directly unplug the power cord to power off the keyboard.




Please do not cut off the power immediately after saving the configuration.

# 3 Menu Operations

## 3.1 Menu Introduction

The menu map might differ depending on the version of the keyboard. The following menu map is for reference only.

Figure 3-1 Menu map

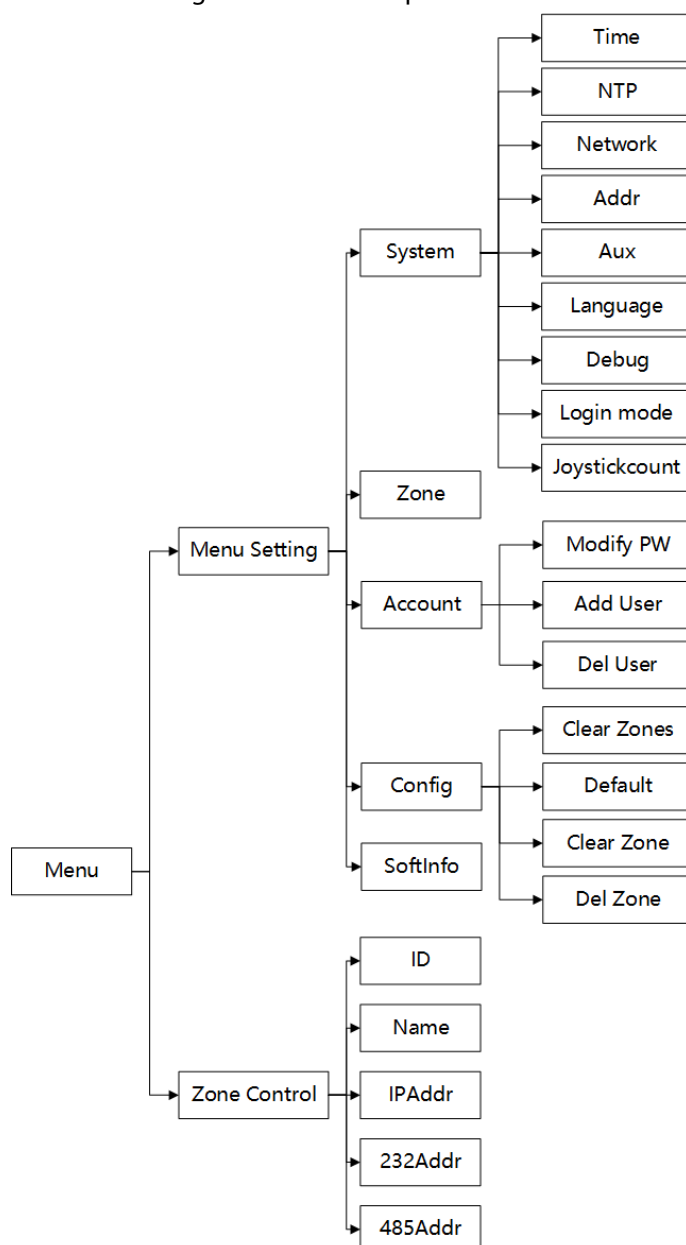

## 3.2 Menu Settings

- Control the joystick up, down, left and right to select the parameters to be configured.
- Configure parameters by entering number, letter and symbol through the keyboard.

- Press ENTER for confirmation after the configuration is completed. Press ESC to exit the current menu.

### 3.2.1 System

You can configure time, NTP, address, auxiliary functions, language, debugging, login mode and joystick counting.

Figure 3-2 System

|          |             |                |
|----------|-------------|----------------|
| ①Time    | ⑤Aux        | ⑨Joystickcount |
| ②NTP     | ⑥Language   |                |
| ③Network | ⑦Debug      |                |
| ④Addr    | ⑧Login mode |                |

#### 3.2.1.1 Time Setting

You can configure the keyboard system time.

##### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > Time**.
- Step 3 Configure the system time.

Figure 3-3 Time setting

|          |       |     |
|----------|-------|-----|
| Mode: 24 | H: 16 | 123 |
| Y: 2024  | M: 35 |     |
| M: 10    | S: 1  |     |
| D: 28    |       |     |

#### 3.2.1.2 NTP Setting

NTP (Network Time Protocol) is used to synchronize the keyboard time to the network time. You can select automatic synchronization or manual synchronization.

##### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > NTP**.
- Step 3 Configure the time synchronization parameters, including the port, update period and time zone.

Figure 3-4 Time settings

|                     |                 |        |
|---------------------|-----------------|--------|
| Server IP: 123      | Period(s): 123  | Manual |
| 0.0.0.0             | 1440            |        |
| Port (0~65535): 123 | Zone: GMT+08:00 |        |
|                     | Auto: no        |        |

- Step 4 Select **auto** to configure NTP mode.
  - Select **yes**, and the keyboard will automatically synchronize the time according to the configured parameters.
  - Select **no** to disable the automatic time synchronization function.




Select **manual** and then press ENTER to synchronize the keyboard time for one time only.

### 3.2.1.3 Network Setting

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > Network**.
- Step 3 Use the joystick to select **On** or **Off**, and then press ENTER.
- When the DHCP function is enabled, the keyboard automatically obtains parameters such as the IP address, subnet mask, gateway, and port.
  - When the DHCP function is not enabled, you need to manually configure the keyboard IP address, subnet mask, gateway, and port (the default port is 37777).

Figure 3-5 Network setting

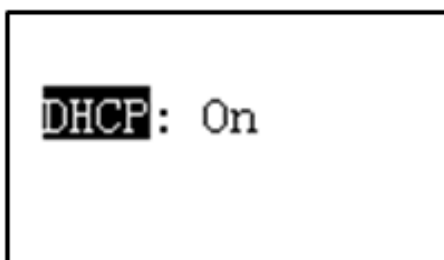

### 3.2.1.4 Address Setting

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > Addr**.
- Step 3 Configure the device address. The value ranges from 0 to 255, and the default value is 0.

Figure 3-6 Configure address




### 3.2.1.5 Auxiliary Setting

You can set the back light for the screen back light and auto logout.

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > AUX**.
- Step 3 Use the joystick to configure the back light for the screen and auto-logout function.
- **Backlight:** Select **On** or **Off** to turn on or off the back light for the screen.
  - **Autologout:** You can select **Off**, **10 min**, **30min** or **60 min**. After you enable this function, the keyboard will log out if there is no operation within the selected time.

Figure 3-7 Aux setting

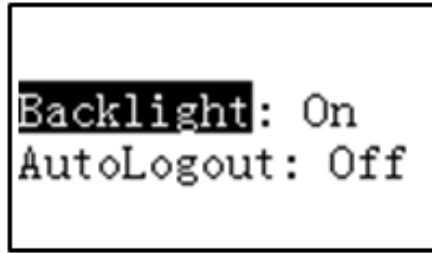

Step 4 Press ENTER to save the settings.


### 3.2.1.6 Language Setting

You can select the language according to your actual situation.

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > Language**.
- Step 3 Use the joystick to select a language, and then press ENTER.

Figure 3-8 Language setting

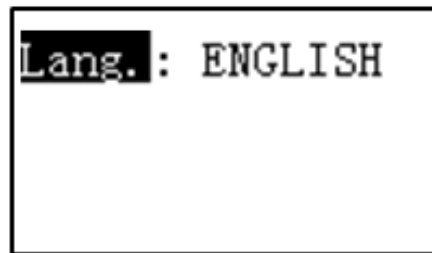


### 3.2.1.7 Debug Setting

You can enable this function to open the background debugging port for technicians.

#### SSH

1. Log in to the keyboard.
2. Use the joystick and ENTER key to select **Menu Settings > System > Debug**.
3. Use the joystick to enable or disable the SSH2 function.

Figure 3-9 Debug setting

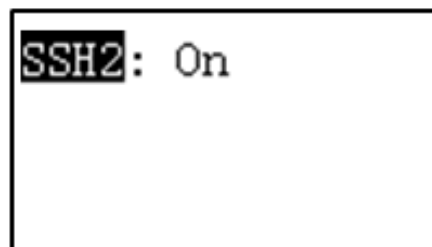

### USB Mode Switching

Switch mode between **Control** and **Storage**. Under the control mode, supports for FAT32 formatted USB drives to enable functions such as packet capturing, log, configuration export, and configuration import.

1. Log in to the keyboard.

2. Use the joystick and ENTER key to select **Menu Settings > System > Debug**.
3. Select **USB Mode** with joystick.

Figure 3-10 USB mode

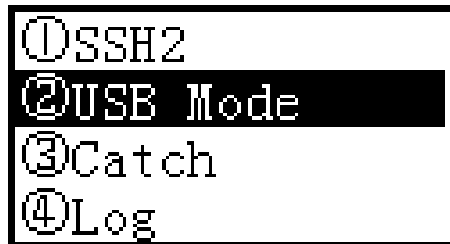


Figure 3-11 USB control


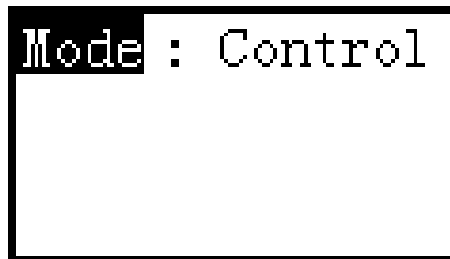


Figure 3-12 USB save



- Select **Save** to enter the save mode, and then select **Export** to export network settings, control point settings, and device configuration.

Figure 3-13 Save mode

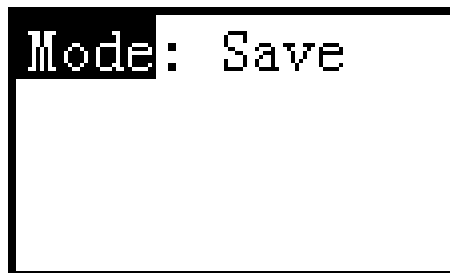

The exported configuration file cannot be modified.

4. Select **Import** to import network settings, control point settings, and device configuration.

## Packet Capture

1. Log in to the keyboard.
2. Use the joystick and ENTER key to select **Menu Settings > System > Debug**.
3. Select **Catch** with joystick. When the packet capture is enabled, the network interaction information will be saved to the USB root directory.



The file extension of the packet capture file is **.pcap**.

Figure 3-14 Catch



## Log

1. Log in to the keyboard.
2. Use the joystick and ENTER key to select **Menu Settings > System > Debug**.
3. Select **Log** with joystick. After the log is enabled, the log will be saved to the USB root directory to generate log files.


Figure 3-15 Log



### 3.2.1.8 Login Mode

Select login mode with joystick. Support **Safe Mode** and **Compatible Mode**.

Figure 3-16 Login mode



The **Compatible mode** poses potential security risks. Therefore, it is recommended to select **Safe mode**.


### 3.2.1.9 Joystick Counting

The function counts the number of times the joystick is used, and the keyboard updates the operation count display every 100 minutes, which acts as a reference for technicians.

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > System > Joystickcount**.
- Step 3 Check the number of times the joystick was used.
- X: the number of times the joystick was used to move left and right.
  - Y: the number of times the joystick was used to move up and down.
  - Z: the number of times the joystick was used to rotate clockwise or counterclockwise.

Figure 3-17 Joystick counting

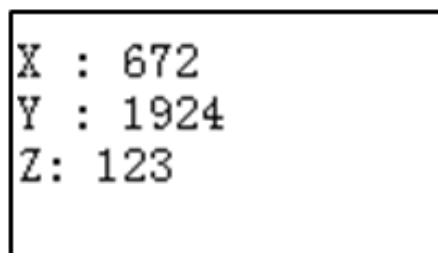

## 3.2.2 Zone (Control Point)

You can configure the control point information to quickly search for devices by ID, device name, serial port address or IP address.

### Procedure

- Step 1** Log in to the keyboard.
- Step 2** Use the joystick and the ENTER key to select **Menu Settings > Zone**.
- Step 3** Configure control points.
- All the items listed must be configured.
  - The control point information must be unique, otherwise the configurations cannot be saved.
  - The serial port types and the serial port attributes must be consistent with the actual connection of the keyboard, otherwise the keyboard cannot be connected to the device.

Figure 3-18 Zone

|           |                |             |
|-----------|----------------|-------------|
| ID: 0     | Rule: DH-2     | Step: 8     |
| Name:     | IPAddr:        | User: admin |
| Type: NVR | 192.168. 1.108 | PW: ****    |
| Link: NET | Port: 37777    |             |

Table 3-1 Description of zone setting


| Parameter | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID        | Set a device ID number to quickly search for the device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Name      | Customize the device name to identify the added devices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type      | Select the device type from SD, NVD, NVR, MATRIX, and SISO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Link      | <p>Link type includes NET, RS-232, and RS-485. Select the type and set the corresponding parameters.</p> <ul style="list-style-type: none"><li>● NET: The device IP address, port, rule, username and password.</li></ul> <p> Enter the device username and password, so that you can manage permissions on the controlled device.</p> <ul style="list-style-type: none"><li>● COM232: The device RS-232 address, rule, baud rate, data bit, parity and stop bit.</li><li>● COM485: The device RS-485 address, rule, baud rate, data bit, parity and stop bit.</li></ul> |

- Step 4** Press ENTER to save the settings.

## 3.2.3 Account

You can change the password, add and delete users.

Figure 3-19 Account

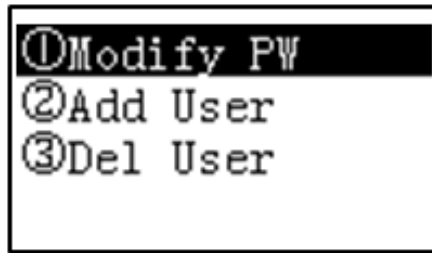

### 3.2.3.1 Changing the Password


#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Account > Modify PW**.
- Step 3 Use the joystick to select a user.
- Step 4 Enter and confirm the new password.



The password must consist of 8 characters, and must be a combination of numbers and letters.

Figure 3-20 Changing password

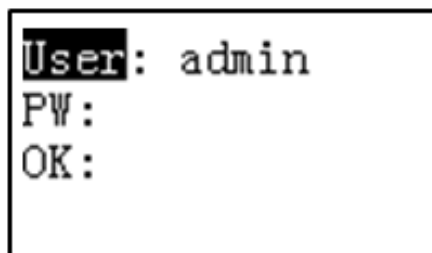


- Step 5 Press ENTER to save the settings.

### 3.2.3.2 Adding Users

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Account > Add User**.
- Step 3 Enter the username and password.

Figure 3-21 Add users

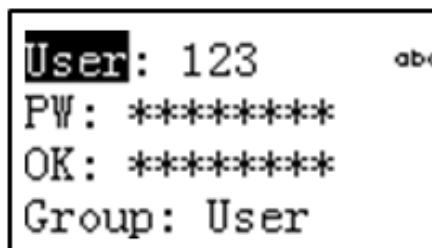



- We recommend that you use letters or numbers for the username.
- The password must consist of 8 characters, and must be a combination of numbers and letters.

Step 4 Configure **Group**. You can select **Guest** or **User**.

- Guest: The guest can only operate control points without other permissions.
- User: The user has the permission of PTZ control, system setup, backup, advanced setup and more.

### 3.2.3.3 Deleting Users


#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Account > Del User**.
- Step 3 Use the joystick to select a user, and then press ENTER.

### 3.2.4 Configuration

You can clear all control points, several control points or a specific control point.

Figure 3-22 Configurations

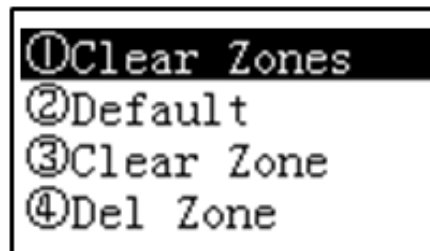

#### 3.2.4.1 Clearing Zones

##### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Config > Clear Zones**.
- Step 3 Press ENTER.



This operation will clear all control point information.

#### 3.2.4.2 Default

##### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Config > Default**.
- Step 3 Press ENTER to restore the keyboard to factory settings.
- The default operation clears network settings, address settings and auxiliary settings in the system management.

- If you need to clear all the settings, press ESC on the keyboard for about 15 s. After the keyboard is restored to default settings, you need to initialize it and reset the password. For details, see "2.1 Powering On".


### 3.2.4.3 Clearing One Zone

Clear a specific control point.

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Config > Clear Zone**.
- Step 3 Use the joystick to select the control point need to be deleted.

Figure 3-23 Clear one zone

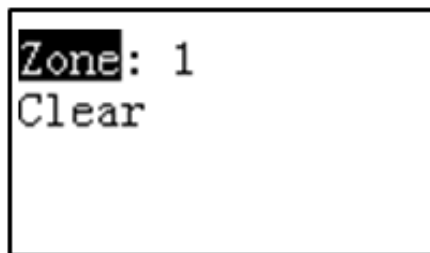

- Step 4 Select **Clear**, and then press ENTER.

### 3.2.4.4 Deleting Zone

You can delete control points in batches.

#### Procedure


- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > Config > Delete Zone**.
- Step 3 Enter number in **Zone** box. Use 5 as an example.
- Step 4 Select **Delete**, and then press ENTER.  
The control points with an ID number less than 5 will be deleted.

### 3.2.5 Software Information

#### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Menu Settings > SoftInfo**.
- Step 3 View relevant information of the current version.

Figure 3-24 Version information

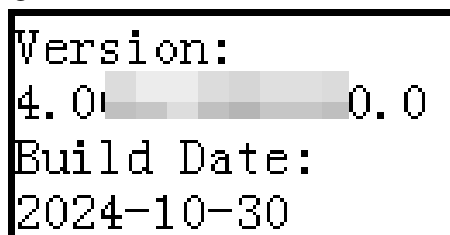

## 3.3 Zone Control

you can set control point information to quickly search for and connect devices by ID, device name, serial port address or IP address.


### Procedure

- Step 1 Log in to the keyboard.
- Step 2 Use the joystick and the ENTER key to select **Zone Control**.
- Step 3 Enter any parameter of the ID, device name, IP address, 232 address or 485 address of the controlled device, and press ENTER to search for the device.



Press ID on the keyboard, and then enter ID number to quickly search for and connect the device.

Figure 3-25 Zone control

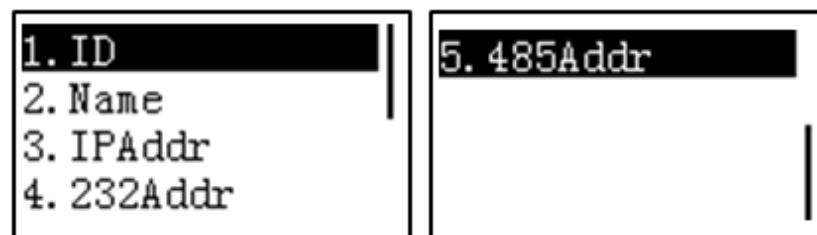

# 4 Controlling the Speed Dome Camera

## 4.1 Keyboard Connection

The keyboard and the speed dome camera (hereinafter referred to as "the Camera") can be connected through the RS-485 port and the network.

### 4.1.1 RS-485 Port Connection

#### Prerequisites

Make sure that the line A and line B of the keyboard RS-485 port have been properly connected to the line A and line B of the Camera.

#### Procedure

- Step 1 Set the Camera address to make it consistent with the keyboard RS-485 address.
- Step 2 Configure the control point on the keyboard. For details, see "3.2.2 Zone (Control Point)".


- Set **Type** as **SD**.
- Set **Link** as **COM485**.
- Select a rule based on the Camera type.
- Set **Step** as **8**.



For the configuration of other parameters, see the User's Manual of the Camera.

- Step 3 Press **ID** on the keyboard and enter the Camera ID configured in **Zone** to connect the two devices.

Figure 4-1 Connected successfully

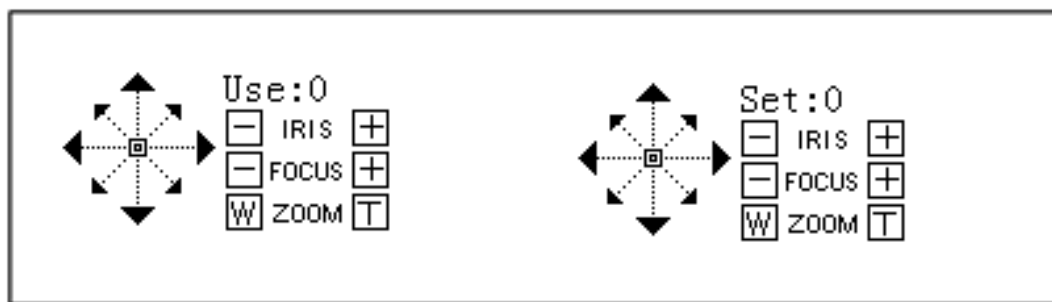

- Step of the Camera is variable by default. The speed of the Camera increases with the increase of the inclination angle of the joystick.
- The lens movement supports eight directions: Up, down, left, right, left up, right up, left down, right down. You can use the joystick to control the lens movement.

## 4.1.2 Network Connection

The network connection operation is similar to that of the RS-485 port connection. When configuring the control point in **Zone**, see the following parameters.

- Select **NET** as the link type.
- The **IPAddr** is the IP address of the Camera.
- The **Port** is 37777 by default.
- The **User** and **PW** are the username and password to log in to the Camera.
- The **Step** is 8 by default.



For the configuration of other parameters, see the User's Manual of the Camera.

## 4.2 Keyboard Operations

- Press the SETUP key on the keyboard to switch between the **Set** mode and the **Use** mode.
- In the use mode, move the joystick up, down, left and right to control the PTZ.
- In the set mode, move the joystick left and right to move the menu item up and down.
- In the set mode, move the joystick left and right to select menu items.
- Press ENTER to enter the sub-menu. Press ESC to return to the previous menu.

### 4.2.1 Aperture/Focus/Zoom

#### Configuring the Iris

On the keyboard, press the IRIS + key and the IRIS - key to adjust the iris.

#### Configuring the Focus

On the keyboard, press the FOCUS + key and the FOCUS - key to adjust the focus.

#### Configuring the Zoom

On the keyboard, press the ZOOM + key and the ZOOM - key to adjust the zoom.

### 4.2.2 Preset

The preset means that the Camera can store such location parameters as PTZ horizontal angle, inclination angle, and the lens focal length under the current situation. If you need those parameters later, you can quickly adopt them and adjust the PTZ and the Camera to those locations.

#### 4.2.2.1 Setting a Preset

There are two ways to set a preset: Shortcut mode and general mode.

##### Shortcut Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select the **Set** mode.

3. Enter the preset number and press PRESET to quickly set a preset.




The preset number is used to quickly use this preset.

## General Mode

1. Connect the keyboard to the Camera.
2. Press PRESET, and then enter the preset number in the **PreNo.** box.
3. Select **Set**, and then press ENTER.

Figure 4-2 Preset

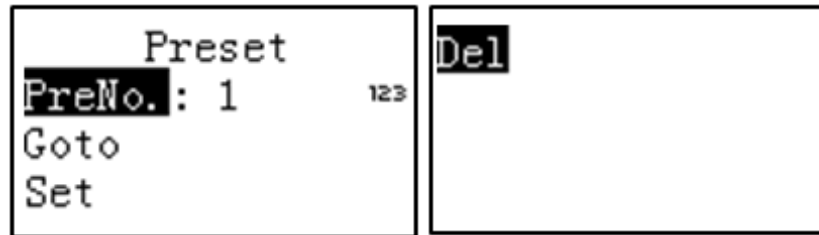

Enter the preset number, select **Del**, and then press ENTER to delete a preset.

### 4.2.2.2 Using a Preset

There are two ways to use a preset Shortcut mode and general mode.

## Shortcut Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select the **Use** mode.
3. Enter the preset number and press PRESET to quickly use a preset.

## General Mode

1. Connect the keyboard with the Camera.
2. On the keyboard, press SETUP to select the **Set** mode.
3. Press PRESET, and then enter the preset number in the **PreNo.** box.
4. Select **Goto**, and then press ENTER.

## 4.2.3 Scan

After configuring the left and right margins of the scanning range, the Camera scans horizontally at a certain speed between the defined left and right margins.

### 4.2.3.1 Setting a Scan


## Procedure

- Step 1    Connect the keyboard to the Camera.
- Step 2    On the keyboard, press SETUP to select the **Set** mode.
- Step 3    Press SCAN, and then enter the scan number in the **ScanNo.** box.
- Step 4    Select **Set**, and then press ENTER.




The scan number is used to quickly perform this scan.

Figure 4-3 Scan

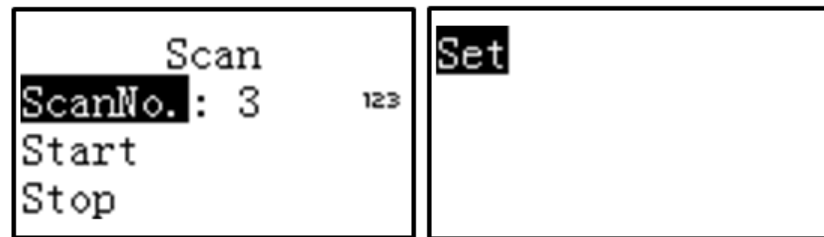

**Step 5** Set the left and right margins. Use the joystick to control the Camera to the left margin and the right margin.

Figure 4-4 Set margins

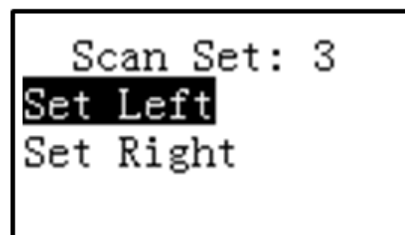

**Step 6** Press ENTER to save the settings.

### 4.2.3.2 Performing a Scan

#### Shortcut Mode

1. Connect the keyboard to the Camera.
2. Enter the scan number, and then press SCAN to quickly perform the scan.
3. Press SCAN again to stop the scan.

#### General Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select the **Set** mode.
3. Press SCAN and enter the scan number in the **ScanNo.** box.
4. Select **Start** and then press ENTER to start the scan according to the preset left and right margins.
5. Select **Stop** and then press ENTER to stop the scan.

### 4.2.4 Pan

Pan refers to the continuous 360° rotation of the Camera in a horizontal way at a certain speed.


#### Shortcut Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select the **Use** mode.
3. Press PAN to start a pan.
4. Press PAN again to stop the pan.

## General Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select **Set** mode.
3. Press PAN.
4. Select **Start**, and then press ENTER to start a pan.

Figure 4-5 Pan

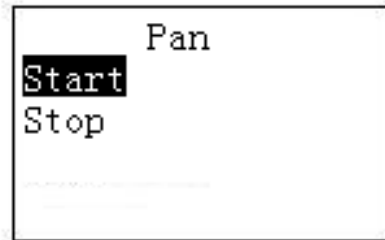

5. Select **Stop**, and then press ENTER to stop a pan.

## 4.2.5 Tour

After configuring tour group, the Camera repeats touring among the configured presets.

### 4.2.5.1 Setting a Tour


#### Procedure

- Step 1 Connect the keyboard to the Camera.
- Step 2 On the keyboard, press SETUP to select the **Set** mode.
- Step 3 Press TOUR, and enter the tour number in the **TourNo.** box.
- Step 4 Select **Set**, and then press ENTER.



The tour number is used to quickly perform this tour.

Figure 4-6 Tour

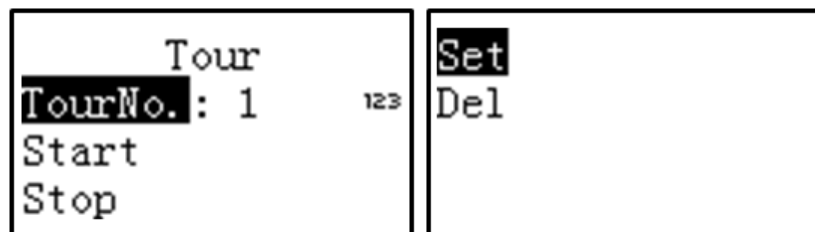


- Step 5 Add or delete presets in a certain tour.
- Enter the preset number in the **PresetNo.** box, select **PresetAdd**, and then press ENTER to add this preset.
  - Enter the preset number in the **PresetNo.** box, select **PresetDel**, and then press ENTER to delete this preset.



Multiple presets can be added.

Figure 4-7 Configuring presets

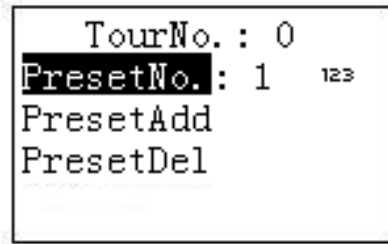

## Related Operations

On the **Tour** Screen, enter the tour number, select **Del**, and then press ENTER to delete this tour.

### 4.2.5.2 Performing a Tour

#### Shortcut Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select **Use** mode.
3. Enter the tour number and press TOUR to quickly perform the tour.
4. Press TOUR again to stop the tour.

#### General Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select **Set** mode.
3. Enter the tour number in the **TourNo.** box.
4. Select **Start** and then press ENTER to start a tour.
5. Select **Stop** and then press ENTER to stop the tour.

## 4.2.6 Pattern

Pattern means a record of a series of operations that you make on the Camera.

### 4.2.6.1 Setting a Pattern


#### Procedure

- Step 1    Connect the keyboard to the Camera.
- Step 2    On the keyboard, press SETUP to select the **Set** mode.
- Step 3    Press PATTERN, and then enter a pattern number in the **PatNo.** box.
- Step 4    Select **Set**, and then press ENTER.



The Pattern number is used to quickly use this pattern.

Figure 4-8 Pattern

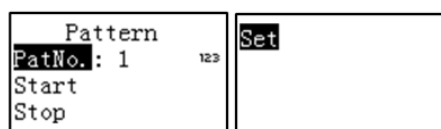

- Step 5    Set the pattern with the joystick.

Step 6 Press ENTER to stop setting.

The Camera can automatically record all your operations between the two pressing of ENTER.

### 4.2.6.2 Using a Pattern

#### Shortcut Mode

1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select the **Use** mode.
3. Enter the pattern number, and then press PATTERN to quickly use the pattern.
4. Press PATTERN again to stop the pattern.

#### General Mode


1. Connect the keyboard to the Camera.
2. On the keyboard, press SETUP to select **Set** mode.
3. Press PATTERN, and then enter the pattern number in the **PatNo.**box.
4. Select **Start** and then press ENTER to start a pattern.
5. Select **Stop** and then press ENTER to stop the pattern.

### 4.2.7 Step

Press 3 and **SETUP** to switch between fixed step and variable step.

Use joystick to switch fixed step and variable step.

Figure 4-9 Step

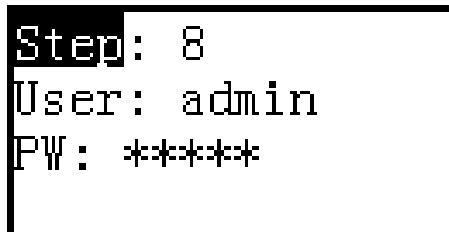


```
Step: 8
User: admin
PW: *****
```

### 4.2.8 Brush

Press 1 and SETUP to enter the brush mode. Control the brush with joystick.

Figure 4-10 Brush

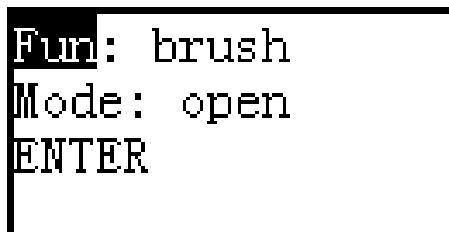

```
Fun: brush
Mode: open
ENTER
```

## 4.3 Multi-Channel Speed Dome Control

Add multi-channel speed dome through ONVIF protocol.

### Prerequisites

Enable ONVIF service of the front-end device or create an ONVIF account.

### Procedure


- Step 1** Configure point control configuration point, and then add speed dome through ONVIF protocol.

Figure 4-11 Add speed dome

|           |             |             |
|-----------|-------------|-------------|
| ID: 0     | Rule: ONVIF | Step: 8     |
| Name:     | IPAddr:     | User: admin |
| Type: SD  | 1 3         | PW: *****   |
| Link: NET | Port: 80    |             |


- Step 2** Perform control point configuration.

Figure 4-12 Control point operations




- Step 3** Press SETUP, and then enter the numerical key corresponding to a specific channel number of the multi-channel PTZ camera, then press the CAM key.

Figure 4-13 Setup



- Step 4** Press SETUP to return to operation page.

Figure 4-14 Setup



# 5 Controlling the DVR

## 5.1 Network Connection

The keyboard and the DVR can be connected through the network. Refer to the actual product to select a proper connection method.

When configuring the control point in **Zone**, see the following parameters.

- **Link**: NET.
- **IPAddr**: the IP address of the DVR.
- **Port**: 37777 by default.
- **User** and **PW**: the username and password to log in to the DVR.

## 5.2 Keyboard Operations

### 5.2.1 Logging in to the DVR

#### Prerequisites

The DVR local user has higher priority than the keyboard user. Log out of the local user of the DVR before login, otherwise the keyboard cannot be used normally.

#### Procedure

Step 1 On the keyboard, press **ENTER** and then select **Zone Control**.

Step 2 Enter any parameters of ID, device name, IP address, configured in **Zone**, and press ENTER to begin the search.  
If the DVR is found successfully, it will be automatically connected.



Press **ID** on the keyboard, enter ID number, and then press ENTER to quickly search for and connect the DVR.

Step 3 Press **ID** again to exit the **Zone Control** screen.

### 5.2.2 General functions

#### Press One by One

- Number + MULT: Split the window. 16 + MULT: Enter 16 first, and then press the MULT key to split the DVR window into 16 sections.  
If you use the joystick at the same time:
  - ◇ Left or right: Switch between 1–16 windows and 17–32 windows.
  - ◇ Up or down: Switch to 1, 4, 9 or 25, 32 sections.
- Number + CAM: Select a specific channel. 9 + CAM: Enter 9 first, and then press the CAM key to

switch the input source to channel 9.

- Number + PTZ: Control the PTZ of the corresponding channel.

## Press at the Same Time

- AUX + 1: Records videos.
- AUX + 2: Enable DVR PTZ control, and press FN + 1 to switch the PTZ control page.
- FN + 1: Auxiliary functions.
- FN + 2: Tour.



The macro function of the DVR must be enabled.

- FN + 3: Control the electronic zoom.

# 6 Controlling the Display Control Devices

## Background Information

After connecting the keyboard to the display control devices, you can display the video on the wall through the keyboard.

The operations might differ depending on devices. The operation of the network video decoder (NVD) is used as an example.

## Procedure

**Step 1** Log in to the NVD web page.

**Step 2** Acquire the control ID of the output screen.


- 1) Select **Setup > Display Management > Video Wall Setup**, and then double-click a video wall.



If there is no video wall, click **Add Video Wall** to create a video wall. For details, see "Appendix 2.2 Adding Video Walls".

- 2) Select **Show Block Control ID** and the control ID is displayed.

Figure 6-1 Video wall setup

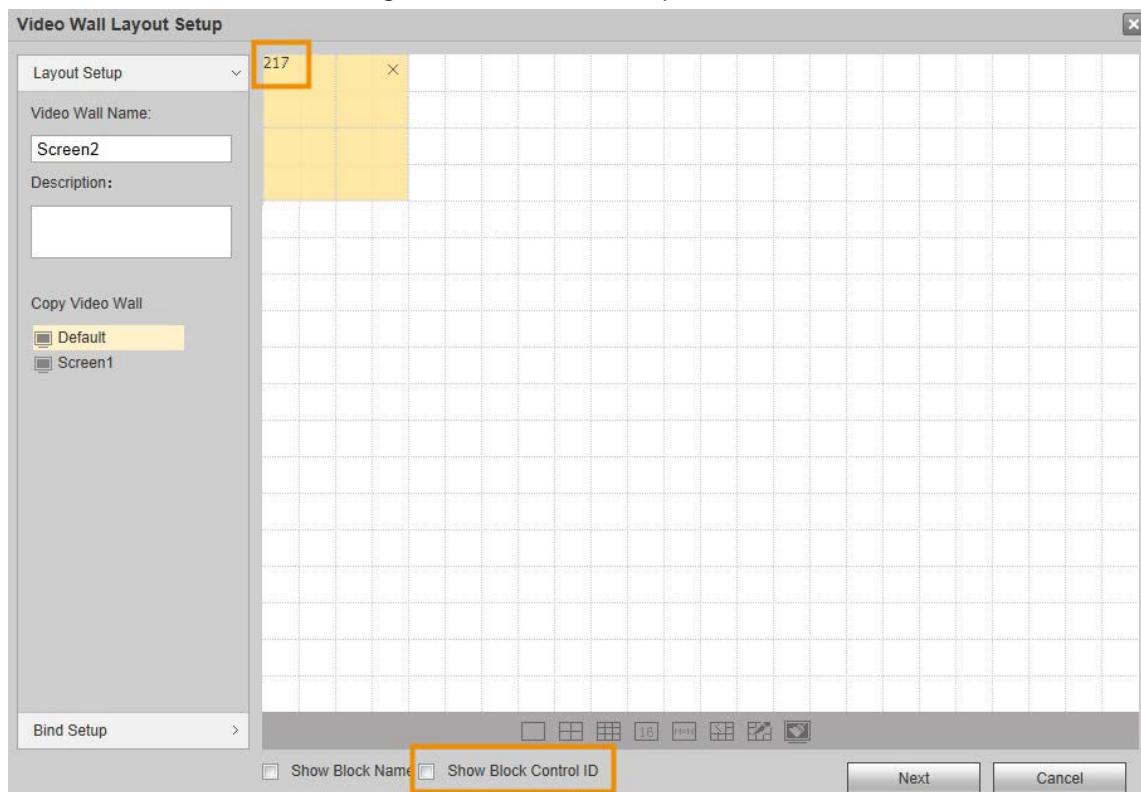

**Step 3** Acquire the control ID of the input channel.

- 1) Select **Setup > Signal Management**.
- 2) Select **Network Signal** or **Local Signal**, and view the control ID.



If there is no channel, add the channel first and then set its control ID. For details, see "Appendix 2.1 Adding Channels".

Figure 6-2 Network signal


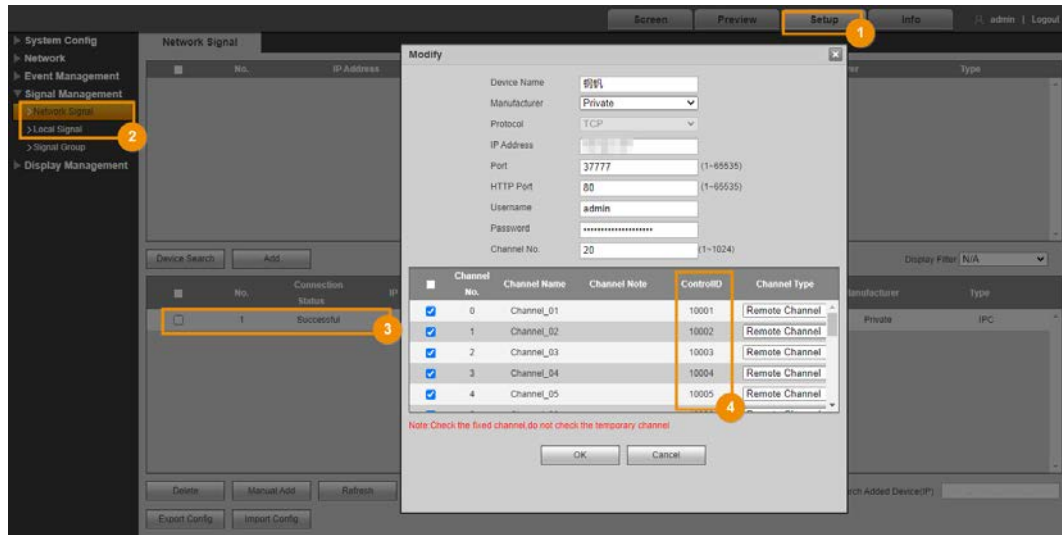


Figure 6-3 Local signal

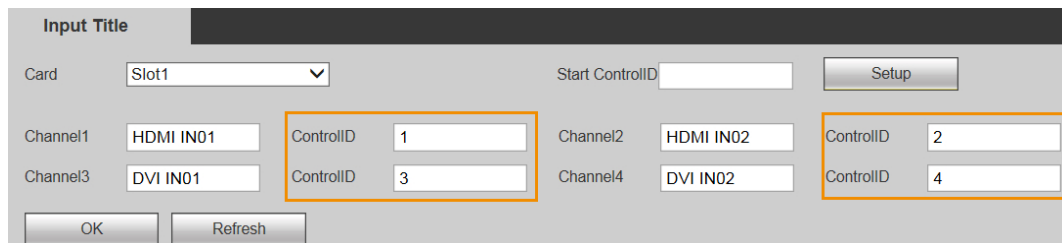

- Step 4** Log in to the keyboard. Select **Menu Settings > Zone**, and set the control point information of the NVD. For details, see "3.2.2 Zone (Control Point)".
- Step 5** On the keyboard, press ID, enter the NVD ID and then press ENTER. For details, see "3.3 Zone Control".
- Step 6** After the two devices are connected, you can display the video on the wall through the keyboard.
- 1) Enter the screen control ID acquired in step 2, and then press PLAY.
  - 2) Enter a number, and then press MULT. The window will be split into several lsections.
  - 3) Enter a number and then press PTZ to select the window to be on the wall.
  - 4) Enter the channel control ID acquired in step 3, and then press CAM to select the input channel.
  - 5) Press ENTER.

## Example

The control ID of the output screen is 217 and the screen is split into nine sections. The window to be displayed on the wall is the window 3 and the channel control ID acquired in step 3 is 10002.Operation on the keyboard: 217+ PLAY + 9 + MULT +3 + PTZ + 10002 + CAM + ENTER.

Figure 6-4 Keyboard screen


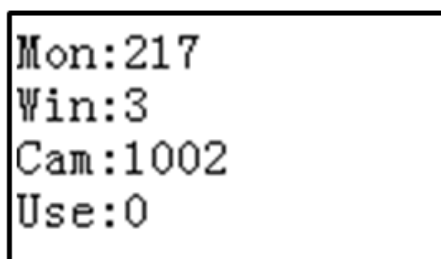


Figure 6-5 NVD web page

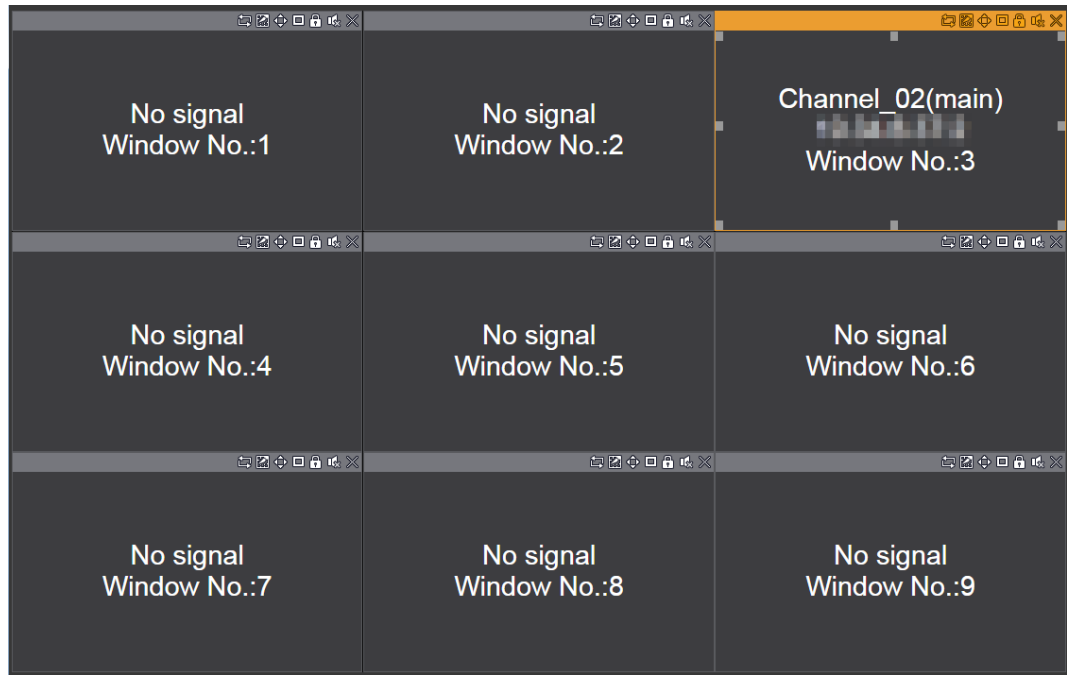


## 7 Controlling the DSS Pro

### Procedure


- Step 1 Log in to the keyboard.
- Step 2 Use the standard USB cable to connect the keyboard to the computer running DSS Pro.

Figure 7-1 USB connection

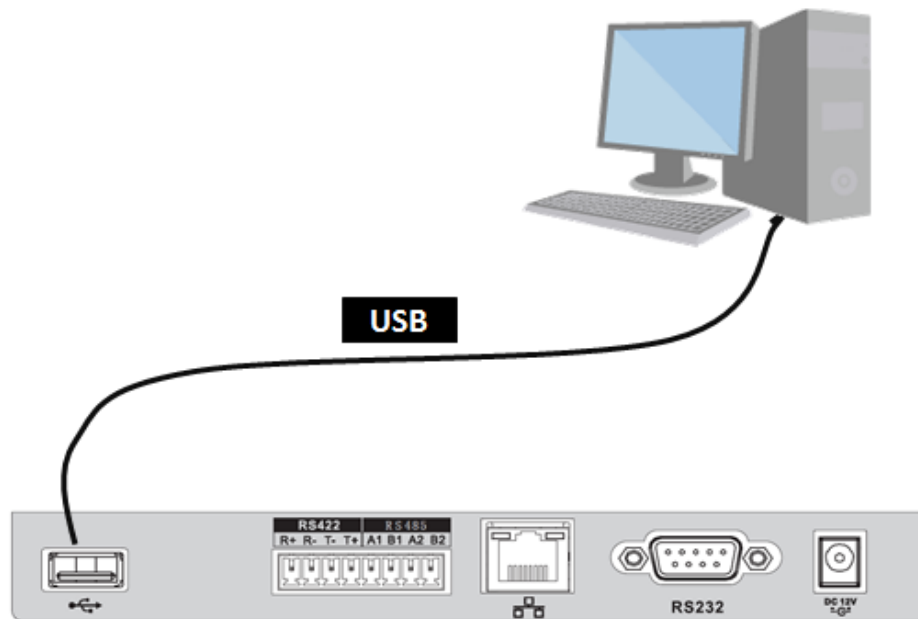

The keyboard will be recognized as **HID Keyboard Device** in the computer device manager page. If the keyboard is recognized as **HID-Compliant game controller**, press and hold the SHIFT key to restart it.

Figure 7-2 USB connection

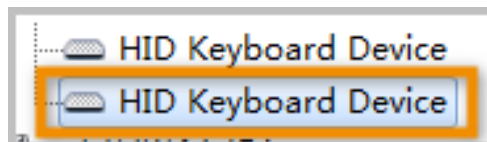


- Step 3 The keyboard displays the mode selection screen. Select **View** mode, and press ENTER.



You can move the joystick left and right to switch between the **View** mode and the **TV Wall** mode.


Figure 7-3 View mode

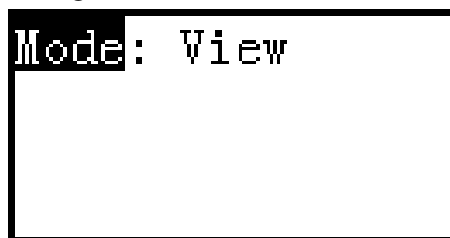

- Step 4 Switch the computer input method to English, otherwise there will be a problem in key-value pairs.
- Step 5 On the DSS Pro client page, select **Local Config** > **Shortcut Key** > **Joystick USB NKB**, and


then click **Save**.

Figure 7-4 Keyboard type

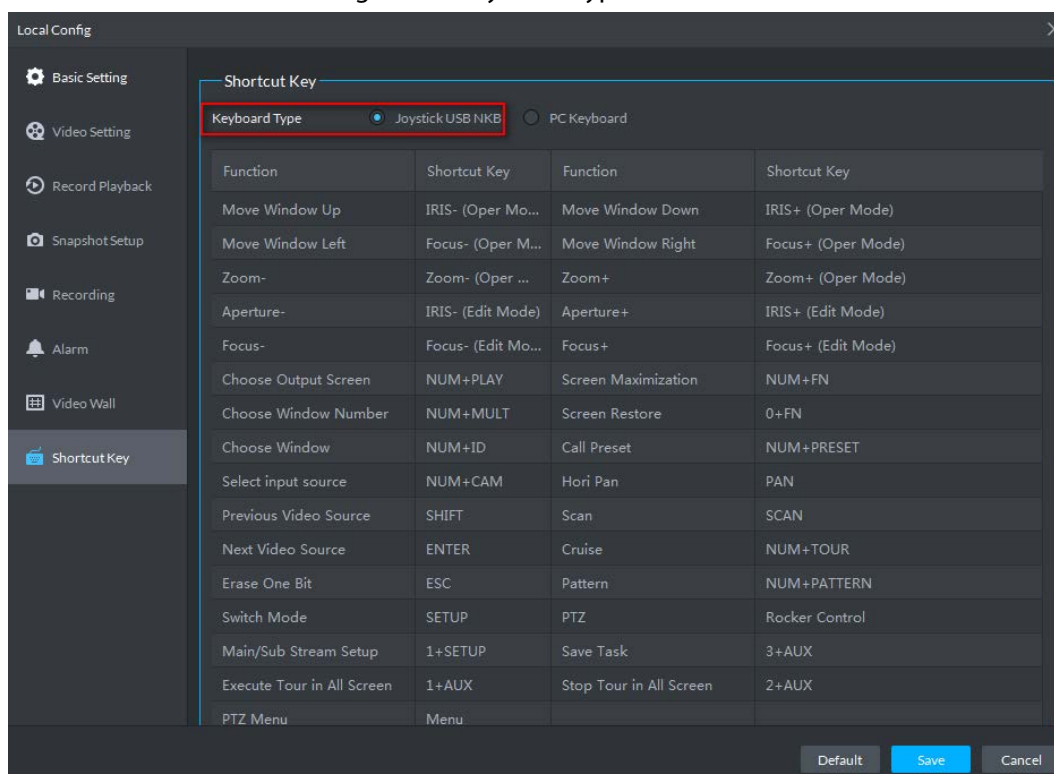

**Step 6** On the DSS Pro manager, configure the key value for the channel.

Figure 7-5 Key value

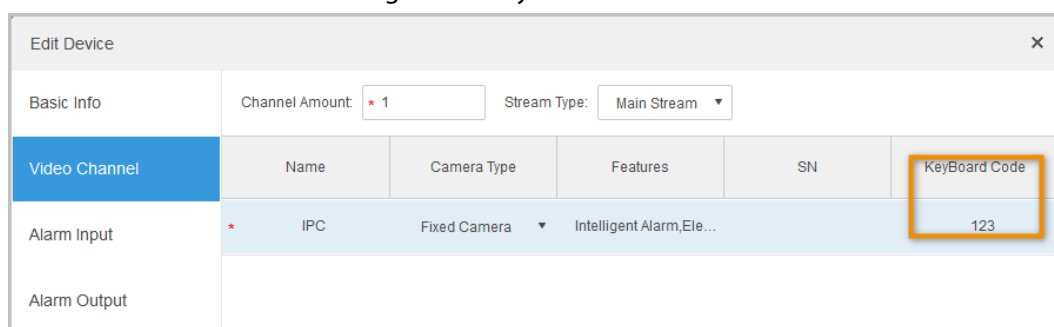

**Step 7** Control the DSS Pro through the keyboard.

## Example

The control ID of the output screen is 1 and the window is split into four sections. The window to be displayed on the wall is the window 3 and the key value configured in step 6 is 123. Operation on the keyboard: 1+ PLAY + 4 + MULT +3 + ID + 123 + CAM.




- 1+ PLAY: Press 1 and PLAY one by one, and so on.
- The PTZ operation is controlled by the joystick.

Figure 7-6 Keyboard screen

```
Mon:  
Win:  
Cam:  
Use:
```


Figure 7-7 DSS Pro page

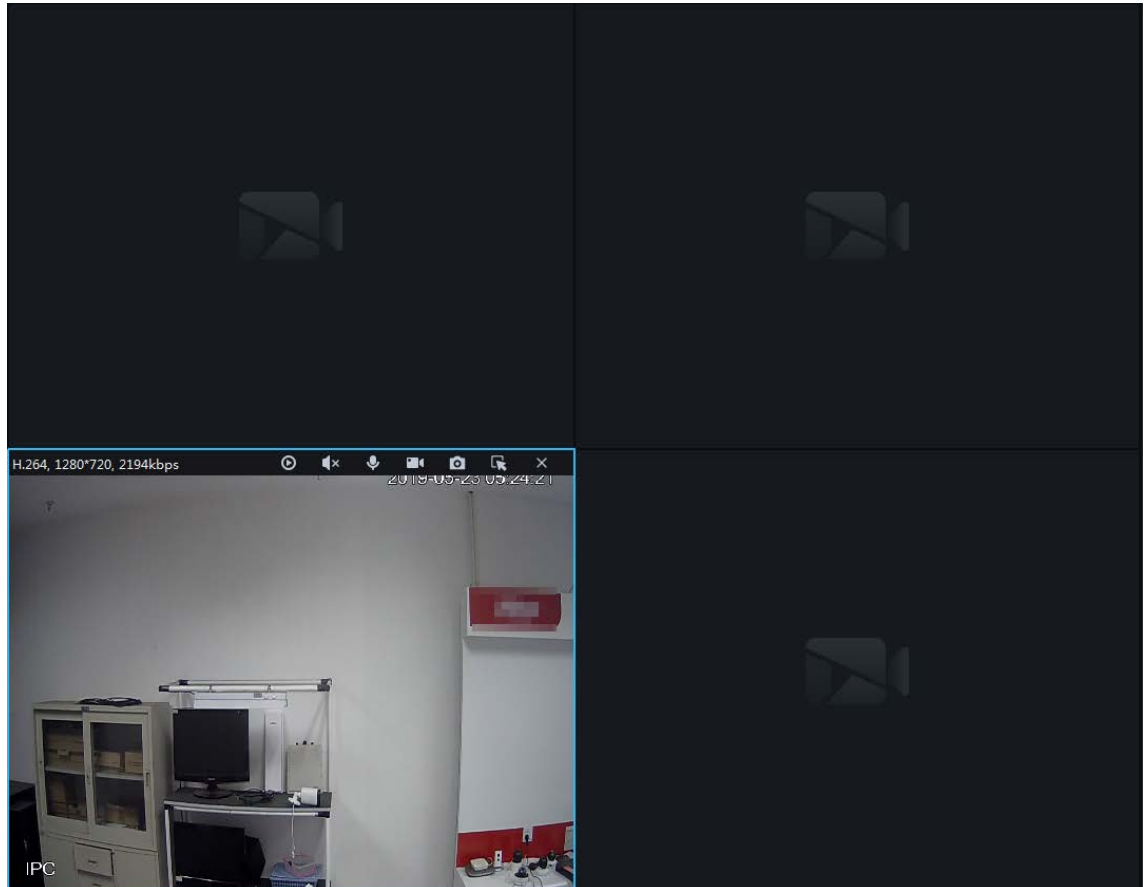


# Appendix 1 RJ-45 Network Port Connection

RJ-45 network port connection includes direct connection and connection through a network switch.

Appendix Figure 1-1 Direct connection

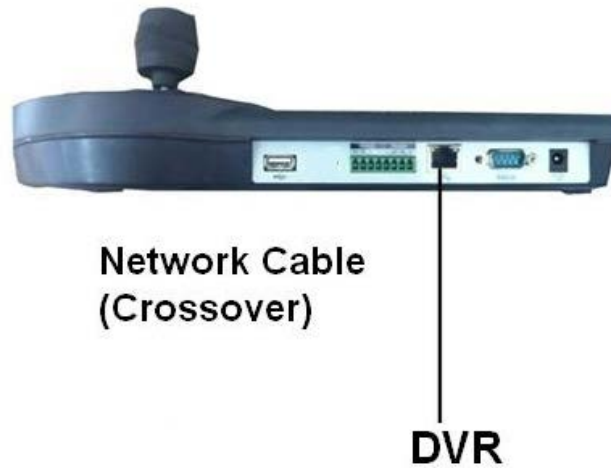

Appendix Figure 1-2 Connection through switch

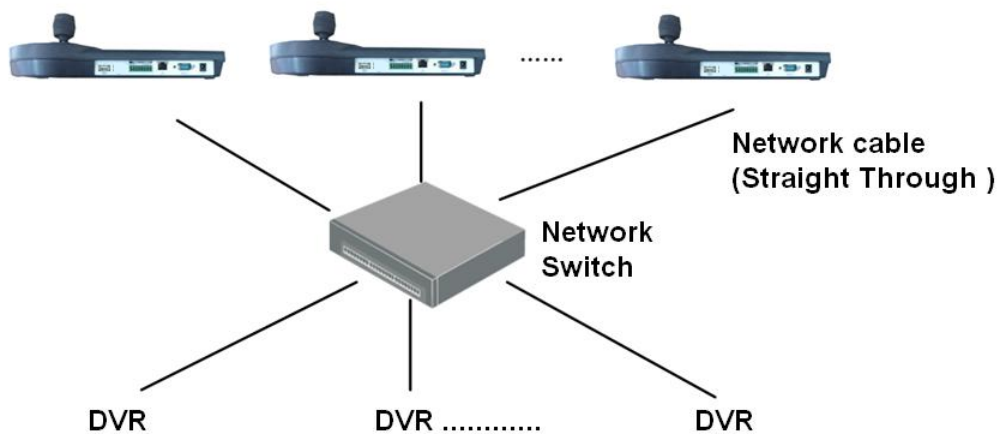

# Appendix 2 Operations of Display Control Devices

You need to add input channels and output video walls to the NVD and configure their control IDs before displaying the video on the wall.

## Appendix 2.1 Adding Channels

### Appendix 2.1.1 Network Signal

Add devices in the network, so that you can preview and display network signals on the video wall, and also control the remote device.

#### Procedure

- Step 1 Log in to the NVD web page.
- Step 2 Select **Setup > Signal Management > Network Signal**.
- Step 3 Add channels.



We recommend you select **Manual Add**.

- Adding Manually
  - 1. Click **Manual Add**.
  - 2. Configure the parameters.

Manual Add

Device Name

Manufacturer

Private

Protocol

TCP

IP Address

Port

37777

(1~65535)

Username

admin

Password

•••••

Channel No.

0

(1~1024)

| <input type="checkbox"/> | Channel No. | Channel Name | ControlID |
|--------------------------|-------------|--------------|-----------|
|                          |             |              |           |

Note: Check the fixed channel, do not check the temporary channel

OK

Cancel

| Parameter      | Description                                                        |
|----------------|--------------------------------------------------------------------|
| Device Name    | Enter the name that identifies the added device.                   |
| Manufacturer   | Device manufacturer.                                               |
| Protocol       | It is TCP by default.                                              |
| IP address     | Device IP address.                                                 |
| Ports          | The port number of the added device. The default setting is 37777. |
| Username       | The username and password to log in to the added device.           |
| Password       |                                                                    |
| Channel Number | Channel number of the added device.                                |
| ControlID      | It is used to search for the channel in the keyboard.              |

- 
- 35

Appendix Figure 2-2 Search signals

| Network Signal           |     |               |       |                |              |                |
|--------------------------|-----|---------------|-------|----------------|--------------|----------------|
| <input type="checkbox"/> | No. | IP Address    | Port  | Device Name    | Manufacturer | Type           |
| <input type="checkbox"/> | 1   | 192.168.1.101 | 80    | IPC-HFW8301D   | Onvif        | IPC-HFW8301D   |
| <input type="checkbox"/> | 2   | 192.168.1.102 | 80    | IP_Camera      | Onvif        | IP_Camera      |
| <input type="checkbox"/> | 3   | 192.168.1.103 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 4   | 192.168.1.104 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 5   | 192.168.1.105 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 6   | 192.168.1.106 | 37777 | M60-12U        | Private      | M60-12U        |
| <input type="checkbox"/> | 7   | 192.168.1.107 | 37777 |                | Private      | NKB1000        |
| <input type="checkbox"/> | 8   | 192.168.1.108 | 37777 | NVS_4K         | Private      | NVS_4K         |

Device Search Add Display Filter N/A

2. Select the network signal, and then click **Add**.
  - ◇ If the device is under normal use, **Connection Status** will change from **Failed** to **Successful** after several seconds.
  - ◇ If **Connection Status** remains **Failed**, the device might not be started, or a blocklist has been configured, or it is not included in an allowlist.

Appendix Figure 2-3 Add signals

| Network Signal           |     |               |       |                |              |                |
|--------------------------|-----|---------------|-------|----------------|--------------|----------------|
| <input type="checkbox"/> | No. | IP Address    | Port  | Device Name    | Manufacturer | Type           |
| <input type="checkbox"/> | 1   | 192.168.1.101 | 80    | IPC-HFW8301D   | Onvif        | IPC-HFW8301D   |
| <input type="checkbox"/> | 2   | 192.168.1.102 | 80    | IP_Camera      | Onvif        | IP_Camera      |
| <input type="checkbox"/> | 3   | 192.168.1.103 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 4   | 192.168.1.104 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 5   | 192.168.1.105 | 80    | IPC-HF8249F-FD | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 6   | 192.168.1.106 | 37777 | M60-12U        | Private      | M60-12U        |
| <input type="checkbox"/> | 7   | 192.168.1.107 | 37777 |                | Private      | NKB1000        |
| <input type="checkbox"/> | 8   | 192.168.1.108 | 37777 | NVS_4K         | Private      | NVS_4K         |

Device Search Add Display Filter N/A

| <input type="checkbox"/> | No. | Connection Status | IP Address/ URL | Port | Device Name    | Channel No. | Manufacturer | Type           |
|--------------------------|-----|-------------------|-----------------|------|----------------|-------------|--------------|----------------|
| <input type="checkbox"/> | 1   | Failed            | 192.168.1.103   | 80   | IPC-HF8249F-FD | 1           | Onvif        | IPC-HF8249F-FD |
| <input type="checkbox"/> | 2   | Successful        | 192.168.1.101   | 80   | IPC-HFW8301D   | 1           | Onvif        | IPC-HFW8301D   |
| <input type="checkbox"/> | 3   | Failed            | 192.168.1.104   | 80   | IPC-HF8249F-FD | 1           | Onvif        | IPC-HF8249F-FD |

Delete Manual Add Refresh Search Added Device(IP)

Export Config Import Config

✓ Saved successfully!

## Appendix 2.1.2 Local Signal

You can configure input title and control ID of each channel on the board card.

### Procedure

**Step 1** Select **Setup > Signal Management > Local Signal > Input Title**.

Appendix Figure 2-4 Input title

| Input Title |           |                 |   |           |           |
|-------------|-----------|-----------------|---|-----------|-----------|
| Card        | Slot1     | Start ControlID |   | Setup     |           |
| Channel1    | HDMI IN01 | ControlID       | 1 | Channel2  | HDMI IN02 |
|             |           |                 |   | ControlID | 2         |
| Channel3    | DVI IN01  | ControlID       | 3 | Channel4  | DVI IN02  |
|             |           |                 |   | ControlID | 4         |
| OK          |           | Refresh         |   |           |           |

**Step 2** Select the card, and configure channel name and control ID for each channel.



Enter **Start Control ID** and click **Setup**, so control ID of channels will start from the **Start Control ID**.

Step 3 Click **OK**.

## Appendix 2.2 Adding Video Walls

### Procedure

Step 1 Log in to the NVD webpage.

Step 2 Select **Setup** > **Display Management** > **Video Wall Setup**, and then click **Add Video Wall**.


Step 3 Configure the layout.

- 1) Customize **Video Wall Name** and **Description**.
- 2) Click icons at the bottom of the window to add single screen and split screen quickly.



Press and hold the left mouse button to drag the screen to the desired position.


Appendix Figure 2-5 Add screen

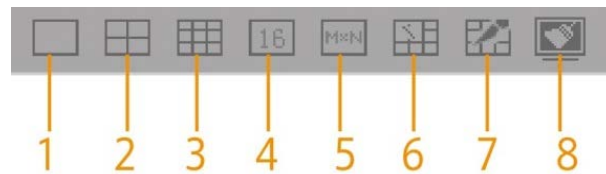

Appendix Table 2-2

| No. | Name            | Description                                                                                                                                                                                                                   |
|-----|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Single Screen   | Click to add single screen.                                                                                                                                                                                                   |
| 2   | 4-split Screen  | Click to add a 4-split screen.                                                                                                                                                                                                |
| 3   | 9-split Screen  | Click to add a 9-split screen.                                                                                                                                                                                                |
| 4   | 16-split Screen | Click to add a 16-split screen.                                                                                                                                                                                               |
| 5   | Custom          | Click the icon, and enter the row and column number in the <b>User Custom</b> window to add a custom screen.                                                                                                                  |
| 6   | Splicing        | Select separate screens, and click this icon to splice them. <ul style="list-style-type: none"> <li>● Splicing screen cannot be selected.</li> <li>● Single screens shall be connected horizontally or vertically.</li> </ul> |
| 7   | Cancel Splicing | Select splicing screens, and click this icon to cancel their splicing.                                                                                                                                                        |
| 8   | Clear Screen    | Clear all screens on the video wall.                                                                                                                                                                                          |

Appendix Figure 2-6 Video wall layout setup

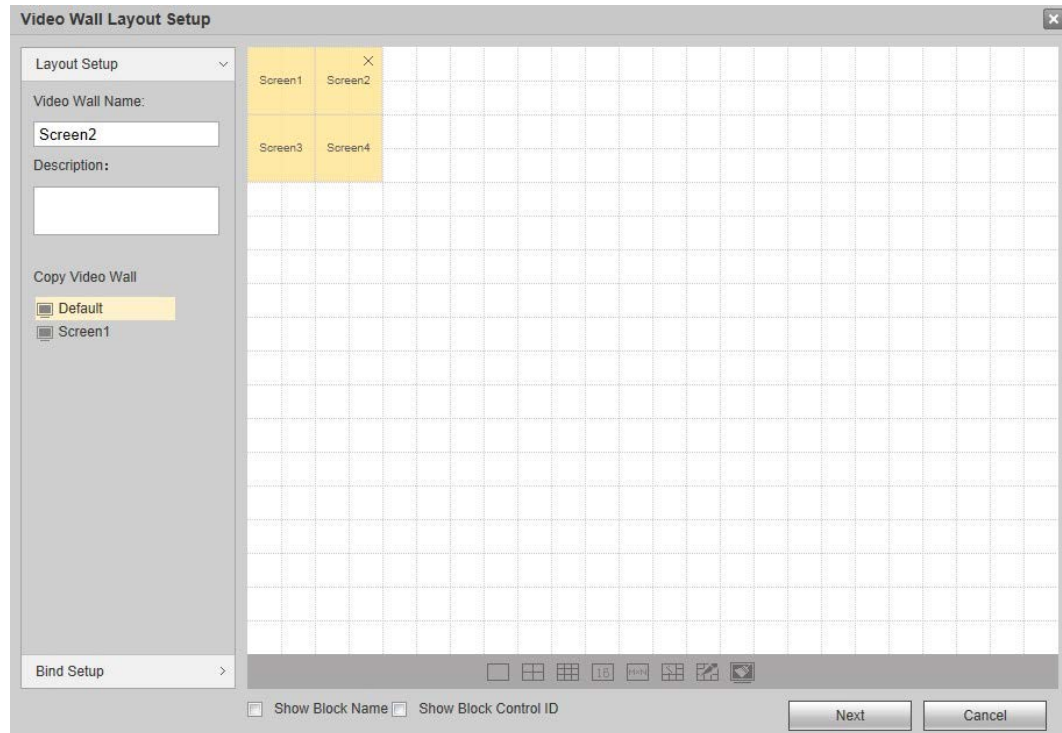


You can select existing video wall from **Copy Video Wall** zone on the left side, and then the layout of video wall is displayed on the right side. You can modify the layout directly.

**Step 4** Click **Bind Setup** or **Next**.

**Step 5** Select one slot, press and hold the left mouse button to drag the slot onto the screen, and bind the slot channel with screen.

- All screens on the video wall shall be bound with slot channel. Otherwise, when you click **Done**, the system will prompt **There is sub screen without bound decoding channel in screen!**
- Slot cannot be bound repeatedly. In case of error, drag a correct slot channel to the screen to cover it directly.
- Click  to automatically bind slot with single screen horizontally.
- Click  to automatically bind slot with single screen vertically.

Appendix Figure 2-7 Slot binding

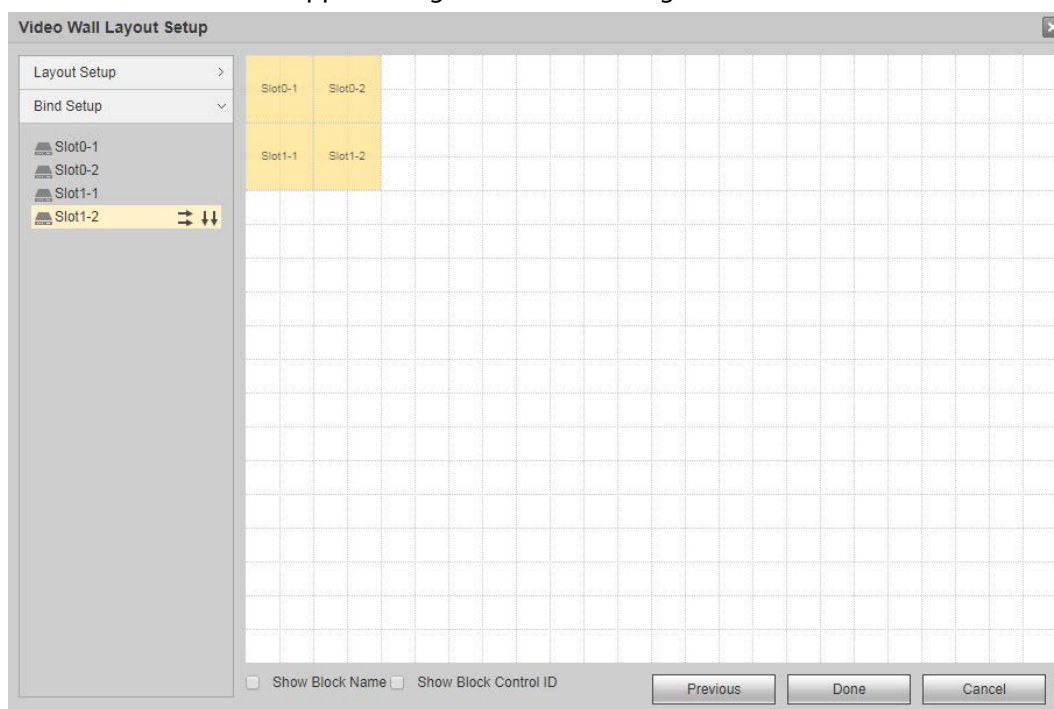

**Step 6** Double-click a new video wall block and set parameters.

Appendix Figure 2-8 Block setup

| row-column | Output Port | Screen Resolution | Screen ControlID |
|------------|-------------|-------------------|------------------|
| 1-1        | Slot0-3     | 1920*1080         | 33               |

Appendix Table 2-3 Parameters description

| Parameter | Description                               |
|-----------|-------------------------------------------|
| Name      | The block name that identifies the block. |

| Parameter  | Description                                                                                   |
|------------|-----------------------------------------------------------------------------------------------|
| Row Delay  | Configure row delay ranging from 0 ms to 100 ms.                                              |
| Resolution | Select <b>Customized</b> to configure resolution of output screen corresponding to each slot. |

Step 7 Click **OK**.

Step 8 Click **Done**

# Appendix 3 Cybersecurity Recommendations

## **Mandatory actions to be taken for basic device network security:**

### **1. Use Strong Passwords**

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters.
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols.
- Do not contain the account name or the account name in reverse order.
- Do not use continuous characters, such as 123, abc, etc.
- Do not use overlapped characters, such as 111, aaa, etc.

### **2. Update Firmware and Client Software in Time**

- According to the standard procedure in Tech-industry, we recommend to keep your device (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the device is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

## **"Nice to have" recommendations to improve your device network security:**

### **1. Physical Protection**

We suggest that you perform physical protection to device, especially storage devices. For example, place the device in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable device (such as USB flash disk, serial port), etc.

### **2. Change Passwords Regularly**

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

### **3. Set and Update Passwords Reset Information Timely**

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

### **4. Enable Account Lock**

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

### **5. Change Default HTTP and Other Service Ports**

We suggest you to change default HTTP and other service ports into any set of numbers between 1024–65535, reducing the risk of outsiders being able to guess which ports you are using.

### **6. Enable HTTPS**

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

### **7. MAC Address Binding**

We recommend you to bind the IP and MAC address of the gateway to the device, thus reducing the risk of ARP spoofing.

### **8. Assign Accounts and Privileges Reasonably**

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

**9. Disable Unnecessary Services and Choose Secure Modes**

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

**10. Audio and Video Encrypted Transmission**

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

**11. Secure Auditing**

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check device log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

**12. Network Log**

Due to the limited storage capacity of the device, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

**13. Construct a Safe Network Environment**

In order to better ensure the safety of device and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.