

AIR2-BS200

WIRELESS TRANSCEIVER



Wireless transceiver with I-BUS interface for connection to Inim control panels.

The Air2-BS200/50 is capable of managing 50 field devices (infrared, double technology, curtain detectors and magnetic contacts) and 100 wireless keyfobs (KF100 or KF-Ergo or KF-Pebble).


Air2-BS200/30 is capable of managing 30 field devices and 50 wireless keyfobs.

Air2-BS200/10 is capable of managing 10 field devices and 30 wireless keyfobs.


The Air2-BS200 is also capable of managing up to 4 Aria/W keypads and 4 Hedera sounderflashers.

Each field device can be mapped on one of the terminals available on the control panel in the same way as each keyfob can be mapped on one of the Inim tags.

Dimensions

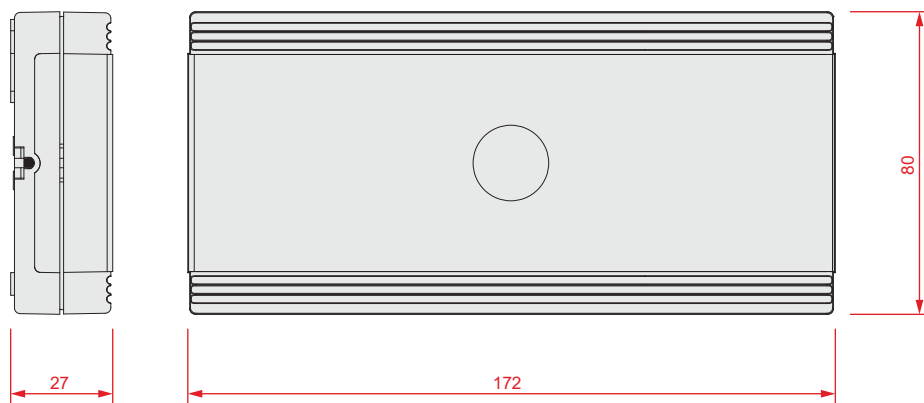

Back

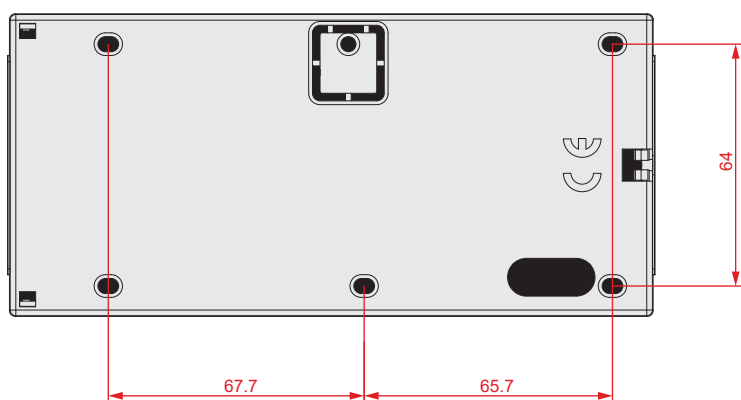

AIR2-BS200




Main features

	BS200/10	BS200/30	BS200/50
Voltage	from 9 to 16V $\overline{\text{DC}}$		
Current draw	35mA		
Communication with wireless devices	Two-way		
Operating frequency	868 MHz		
Programmable supervision time of wireless devices	from 12 to 250 minutes		
Connection to control panel	I-BUS / BUS485 4 wires		
Manageable wireless field devices (magnetic contacts or detectors)	10	30	50
Simulated Flex5 expansion boards	2	6	10
Manageable keyfobs (KF100, Ergo, Pebble)	30	50	100
Manageable keypads (Aria/W)	4		
Manageable sounder/flashers (Hedera)	4		
Field devices mapping	On terminals		
Keyfobs mapping	On tags and cards		
Protections	Dislodgement and opening protection		
Dimensions (HxWxD)	172x80x27 mm		
Weight	135 g		

CONFIGURATION DIAGRAM

Control panel

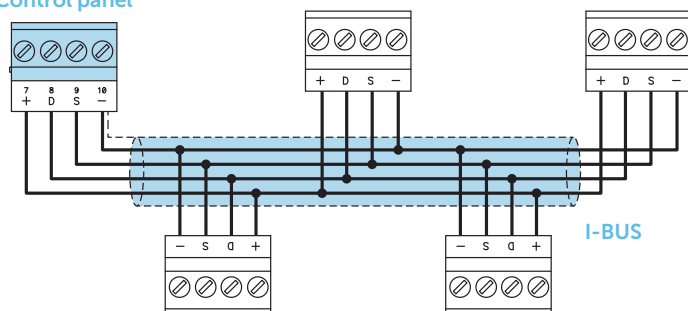

CONNECTABLE WIRELESS DEVICES

Air2-MC200: magnetic contact with shock and tilt sensor in white or brown

Air2-MC300: magnetic contact with two I/O terminals, in white or brown

Air2-KF100: 4 button remote-control key

Air2-Ergo: 4 button remote-control key

Air2-Pebble: 4 button remote-control key

Air2-FD100: smoke detector

Air2-Aria/W: keypad with graphic display

Air2-Hedera: outdoor sounder, in white or chrome effect

Air2-DT200T: dual technology curtain detector, in white or brown

Air2-XIR200W: PIR detector, 12m

Air2-XDT200W: dual technology curtain detector

Air2-UT100: universal transceiver

Air2-ODI100W: outdoor wireless dual-infrared detector

Air2-OTT100W: outdoor wireless triple-technology detector

ORDER CODES

Air2-BS200/50: transceiver up to 50 detectors, up to 100 wireless keyfobs.

Air2-BS200/30: transceiver up to 30 detectors, up to 50 wireless keyfobs.

Air2-BS200/10: transceiver up to 10 detectors, up to 30 wireless keyfobs.

Air2-ANT100N/8: high performance 868MHz external antenna (1.5 meters cable)



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature