

PRODUCT DATASHEET

SGWE

WIRELESS EXPANDER MODULE


The Argus SGWE Expander Module is compatible with all Argus Wireless intelligent translators and the Argus Conventional Expander. The unit provides a convenient method to increase radio communication range beyond that possible from a single translator by relaying the radio communication to further expanders or directly to the wireless field devices. This functionality makes it possible to build large fully wireless systems or add wireless devices into areas where cabling for translators is difficult or impossible. All expanders are fully monitored ensuring the highest levels of life safety and reliability are maintained.



KEY FEATURES

- Compatible with static and conventional translators
- 3rd party Approval to EN54-18 and EN54-25
- Bi-directional wireless communication
- 5 year product warranty
- IP protection for mounting in challenging environments
- Low current consumption
- Supports full device intelligence
- Capability for 32 wireless field devices per expander
- Proven wireless technology

TECHNICAL INFORMATION

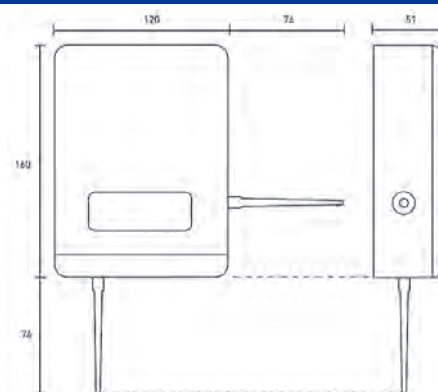

TECHNICAL SPECIFICATION

- | | |
|---|--------------------------|
| ■ Operating frequency range | 868 MHz - 870 MHz |
| ■ Power supply range | 9Vdc – 30Vdc |
| ■ Typical current consumption | 15mA (@24Vdc) |
| ■ Max radiated power | 5dBm (3mW) |
| ■ Operating frequency channels | 7 |
| ■ Communication range with a Translator/Expander Module | ≤ 250m (in open space) |
| ■ Communication range with wireless field devices | ≤ 150m (in open space) |
| ■ Max. no. of devices (per Expander) | Refer to translator spec |
| ■ Temperature range (no icing) | -10°C to 55°C |
| ■ Max humidity (non condensing) | 95% (RH) |
| ■ IP rating | 65 |
| ■ Weight | 300 g |

Note: Certified device performance may vary depending on the approval body.

STANDARDS & APPROVALS

- BS EN 54-18
Input / Output Devices
- BS EN 54-25
Components using radio links and system requirements



0832



928n



0051