

DS9370/DS9371 Series Panoramic TriTech Ceiling Mount Detectors

www.boschsecurity.com**BOSCH**
Invented for life

- ▶ Up to 7.6 m (25 ft) mounting height
- ▶ Fully adjustable optics for coverage integrity and customization
- ▶ Hinged chassis and base plate for easy installation
- ▶ High efficiency LED and light pipe system for easy walk testing
- ▶ First Step processing (FSP)

Each DS9370 Series TriTech PIR/Microwave Motion Detector model is panoramic and uses several patented processing techniques to provide excellent catch performance with freedom from false alarms. Each model can be mounted on ceilings as high as 7.6 m (25 ft). With three separate PIR sections that are fully adjustable, the DS9370 Series provides coverage integrity at all mounting heights, plus the ability to customize the coverage for specific areas.

Functions

Signal Processing

Uses passive infrared and microwave technologies to provide an alarm condition when both fields of protection are simultaneously activated. Alarm signals must meet the signaling requirements of both technologies to activate an alarm.

First Step Processing

FSP allows virtually instant response to human targets without sacrificing false alarm immunity to other sources. By adjusting its sensitivity based upon signal amplitude, polarity, slope and timing, FSP eliminates the need for the installer to select the sensitivity level

for the application. Each sensor is processed individually and both must agree there is an alarm before the alarm relay is activated.

Microwave Signal Processing

Adaptive processing adjusts to background disturbances. This helps to reduce false alarms while maintaining catch performance.

Microwave Supervision

Patented fully supervised microwave provides single technology coverage in the event the microwave subsystem fails.

Test Features


- High efficiency LED and light-pipe system provide walk test indication that is easily viewable from any angle and at any mounting height.
- Alarm memory feature allows detector to latch the alarm LED to aid in response.
- Remote LED walk-test control allows the LED to be enabled or disabled using a switched input without accessing the detector.

Certifications and approvals


Australia		DS9370: AUS C-tick
China	CCC	2004031901000038
Europe		Complies with EN50131-1, Grade 2

Region	Certification	
Australia	RCM	DS9370
Europe	CE	[DS9370][DS9371][DS9370-C]
	EN50131	
Belgium	INCERT	B-509-0013 (DS9370 only)
	INCERT	B-509-0013/b (DS9370-BEL only)
USA	UL	DS9370: ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (cULus) DS9370
	FCC	ESV9370
Canada	IC	1249A-12073
France	AFNOR	28002000101A0
China	CCC	2015031901000325
Sweden	INTYG	15-473 Alarm Class 1/2, Environmental Class II (Larmklass 1/2 miljöklass II)
Brazil	ANATEL	Certificado Anatel 0871-03-1855 [DS9370 & DS9371]
Singapore	iDA	LPREQ-S0154-2004

Installation/configuration notes

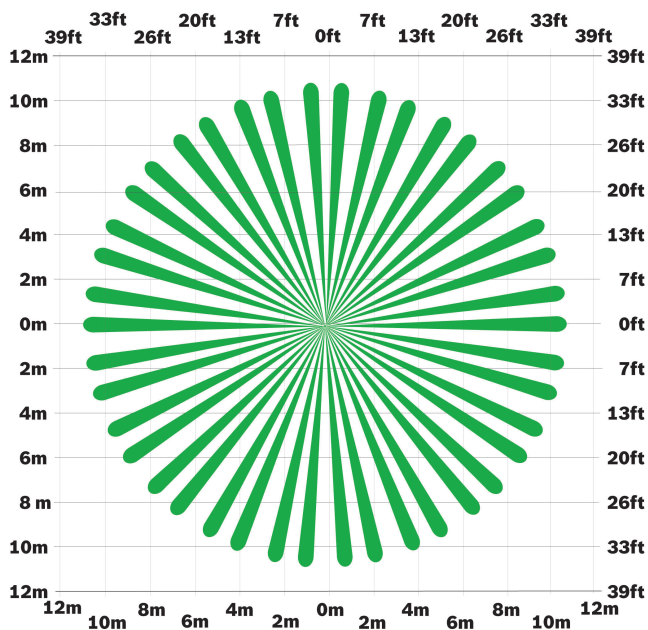

Top View

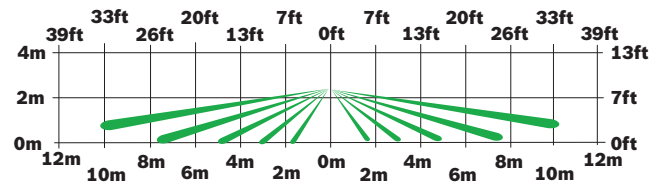

Side View

Mounting Considerations

The mounting height range is from 2.4 m to 7.6 m (8 ft to 25 ft). The recommended mounting height range is from 3.7 m to 7.6 m (12 ft to 25 ft). The coverage area can be set between 9.1 m and 21.3 m (30 ft and 70 ft). If mounted at 2.4 m (8 ft) high, the coverage area can be set between 6.1 m and 12.2 m (20 ft and 40 ft). If mounted at 3 m (10 ft) high, the coverage area can be set between 6.1 m and 15.2 m (20 ft and 50 ft). These detectors can be mounted directly on the ceiling or on a standard 9 cm (3.5 in.) rectangular electrical box.

The maximum range of the detector depends on the mounting height and the vertical adjustment of the PIR coverage pattern. In areas where part of the area needs a targeted coverage, the optical modules can be adjusted for the correct coverage.

A masking kit containing two 120° and two 90° masks is included to allow masking unwanted areas. Apply the masks to the outside of the detector. With the supplied masks, you can mask 90°, 120°, 180°, 210°, 240°, or 330°.

Coverage Information

Provides 360° x 21 m (70 ft) diameter coverage when the detector is mounted at 3.7 m to 7.6 m (12 ft to 25 ft).

Provides 360° x 15 m (50 ft) diameter coverage when the detector is mounted at 3 m (10 ft). 12 m (40 ft) when mounted at 2.4 m (8 ft).

Pattern consists of 69 zones in 21 barriers. Each barrier is 11 m (35 ft) long and 1.5 m (5 ft) wide at 11 m (35 ft). The barriers are grouped into three groups of seven barriers each. Each group has vertical adjustment for customized coverage.

Copyright

This document is the intellectual property of Bosch Security Systems, Inc. and is protected by copyright. All rights reserved.

Technical specifications

Enclosure Design

Design	Modular chassis and hinged mounting base design provide easy access to field setup switches and wiring.
Dimensions	8.9 cm x 17.8 cm (3.5 in. X 7 in.)
Material	High impact ABS plastic enclosure

Environmental Considerations

Operating Temperature	-40°C to +49°C (-40°F to +120°F) <i>For UL Certificated installations, 0°C to +49°C (+32°F to +120°F)</i>
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.

Mounting

Height Range	3 m to 7.6 m (8 ft to 25 ft) recommended
Location	Mounts directly to ceiling or to standard 10.2 cm (3.5 in.) octagonal electrical box.

Outputs

Alarm	Form C reed relay rated at 3.0 W, 125 mA at 28 VDC for resistive loads.
Tamper	Cover and ceiling tamper. Normally Closed (with cover in place) tamper switch. Contacts rated at 28 VDC, 125 mA maximum.

Power Requirements

Current	19 mA standby, 39 mA in alarm.
Voltage	9 VDC to 15 VDC

Ordering information

DS9370 Panoramic TriTech Ceiling Mount Detector

Provides PIR and microwave, 360° x 21 m (70 ft) diameter coverage and 2.4 m to 7.6 m (8 ft to 25 ft) mounting height. 10.525 GHz. White.

Order number **DS9370**

DS9370-C Panoramic TriTech Ceiling Mount Detector

Provides PIR and microwave, 360° x 21 m (70 ft) diameter coverage and 2.4 m to 7.6 m (8 ft to 25 ft) mounting height. 10.588 GHz. White.

Order number **DS9370-C**

DS9370-BEL Panoramic TriTech Ceiling Mount Detector

Provides PIR and microwave, 360° x 21 m (70 ft) diameter coverage and 2.4 m to 7.6 m (8 ft to 25 ft) mounting height. For use in Belgium. 10.525 GHz. White.

Order number **DS9370-BEL**

DS9370-CHI Panoramic TriTech Ceiling Mount Detector

For use in China. Provides first step processing, 360° x 21 m (70 ft) diameter coverage, and up to 7.6 m (25 ft) mounting height. 10.525 GHz. White.

Order number **DS9370-CHI**

DS9371 Panoramic TriTech Ceiling Mount Detector

Provides PIR and microwave, 360° x 21 m (70 ft) diameter coverage and 2.4 m to 7.6 m (8 ft to 25 ft) mounting height. 10.525 GHz. Black enclosure and lenses.

Order number **DS9371**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com